



HMJ2

High Dynamic Range FET Mixer



Product Features

- +37 dBm IIP3
- No External Matching Elements Required
- RF 1850-1990 MHz
- LO 1700-1940 MHz
- IF 50 - 150 MHz
- +17 dBm LO Drive Level
- +3V Bias (25 mA)
- Low Cost SMT J-Lead Package

Product Description

The HMJ2 is a high dynamic range GaAs FET mixer. This active FET mixer realizes a typical third order intercept point of +37 dBm at an LO drive level of +17 dBm. The HMJ2 comes in a low cost, 18-pin J-Lead package. Typical applications include frequency up/down conversion, modulation and demodulation for receivers and transmitters used in PCS systems.

Functional Diagram



Function	Pin No.
IF	2
LO	11
RF	17
+3V	8
Ground	All other pins

Specifications ⁽¹⁾

Parameter	Units	Min	Typ	Max	Condition
RF Frequency Range	MHz		1850-1990		
LO Frequency Range	MHz		1700-1940		
IF Frequency Range	MHz		50 - 150		
SSB Conversion Loss	dB		9.0	10.3	
Noise Figure	dB		10.3		
LO-RF Isolation	dB	17	32		
LO-IF Isolation	dB	22	29		
RF-IF Isolation	dB		15		
Input IP3	dBm	32	37		
RF Return Loss	dB		12		
LO Return Loss	dB		10		
IF Return Loss	dB		14		
Input P1dB	dBm		+25		
LO Drive Level	dBm		+17		
DC Current at +3V Bias	mA		25	35	

1. Test conditions unless otherwise noted: 25 °C, RF = 1900 MHz @ -10 dBm, LO = 1800 MHz @ +17 dBm, IF = 100 MHz

Absolute Maximum Rating

Parameters	Rating
Operating Case Temperature	-40 to +85 °C
Storage Temperature	-65 to +100 °C
Maximum Input Power	+25 dBm

Ordering Information








Part No.	Description
HMJ2	High Dynamic Range FET Mixer
HMJ2-PCB	Fully Assembled Application Circuit

1. Operation of this device above any of these parameters may cause permanent damage.
 2. Total sum of LO port and RF port power should not exceed 25 dBm

Specifications and information are subject to change without notice



Typical Performance Data

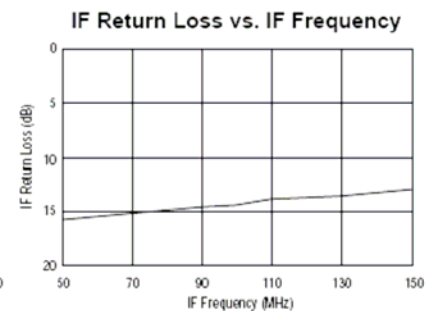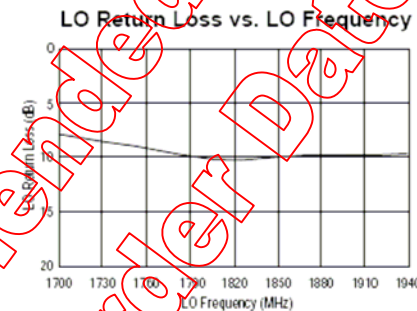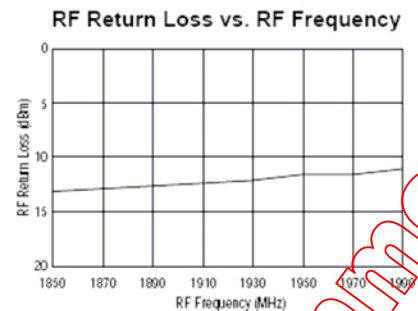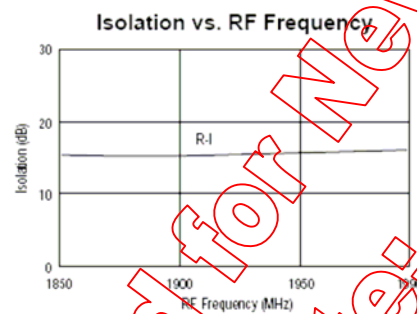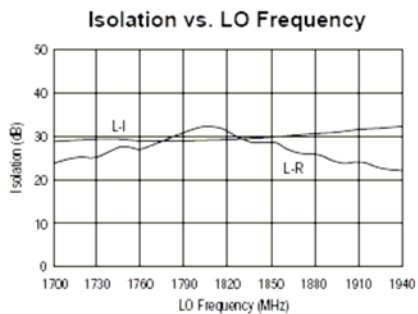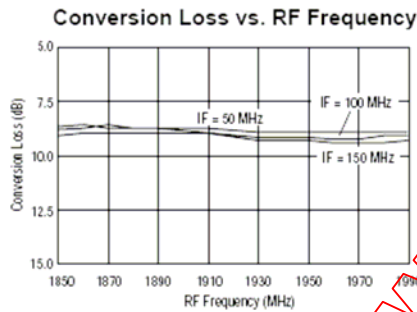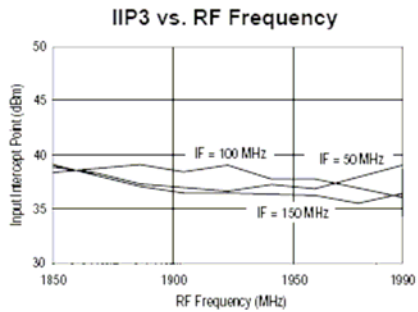

Not Recommended for New Designs
Last Time Order Date: June 3, 2008





HMJ2

High Dynamic Range FET Mixer



Outline Drawing

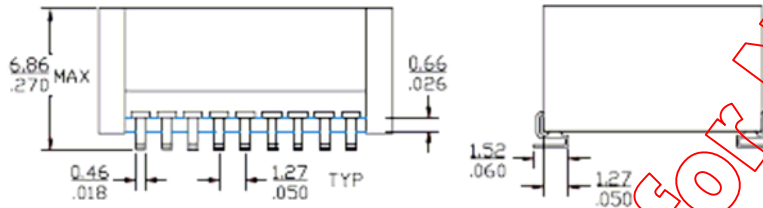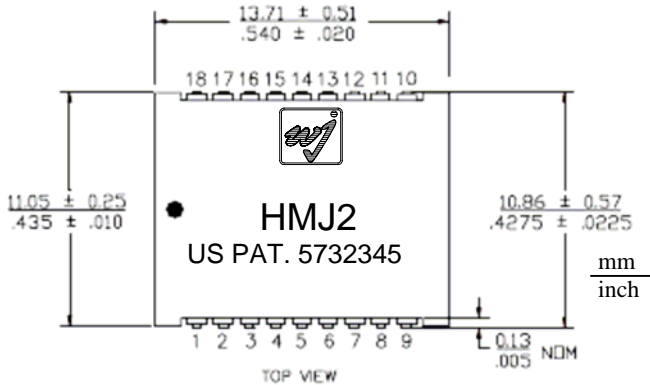

Product Marking

The component will be marked with an "HMJ2" designator with a four-digit alphanumeric lot number XXXX.

Tape and reel specifications for this part are located on the website in the "Application Notes" section.

ESD Information



Caution! ESD sensitive device.

ESD Rating: Class 2
 Value: Passes at 2000 V
 Test: Human Body Model (HBM)
 Standard: JEDEC Standard JESD22-A114

ESD Rating: Class IV
 Value: Passes at 2000 V
 Test: Charged Device Model (CDM)
 Standard: JEDEC Standard JESD22-C101

Mounting Config. Notes

1. Ground vias are critical for thermal and RF grounding considerations.
2. A minimum of 28 ground vias are required for 14 mil FR4 boards.
3. If your PCB design rules allow, ground vias should be placed under the land pattern for better RF performance. Otherwise ground vias should be placed as close to the land pattern as possible.
4. Trace width depends on the PCB material.

Land Pattern / Mounting Configuration

