


μA3089

FM IF LIMITER DETECTOR AUDIO PREAMPLIFIER


FAIRCHILD LINEAR INTEGRATED CIRCUIT

GENERAL DESCRIPTION — The 3089 is a multifunction FM IF detector subsystem. It contains a three stage FM IF amplifier, a detector and an audio buffer amplifier. Auxiliary functions of the device include AGC and AFC for the tuner, a muting circuit and a tuning meter circuit. The circuit is fabricated using the Fairchild Planar epitaxial process.


- 3-STAGE FM IF AMPLIFIER PROVIDING A 12 μV (TYP) LIMITING SENSITIVITY
- LEVEL DETECTORS ON EACH STAGE WITH A COMMON DRIVE FOR A TUNING METER OR A STEREO THRESHOLD LOGIC CIRCUIT
- DELAYED AGC OUTPUT FOR THE TUNER
- DOUBLY BALANCED QUADRATURE DETECTOR PROVIDING LOW DISTORTION — TYPICALLY 0.1% WITH DOUBLE TUNED CIRCUIT
- FLEXIBLE AFC CIRCUIT
- AUDIO PREAMPLIFIER PROVIDING 400 mV (TYP) OF DRIVE
- AUDIO MUTE (SQUELCH) CONTROL CIRCUITS
- INTERNAL VOLTAGE REGULATOR

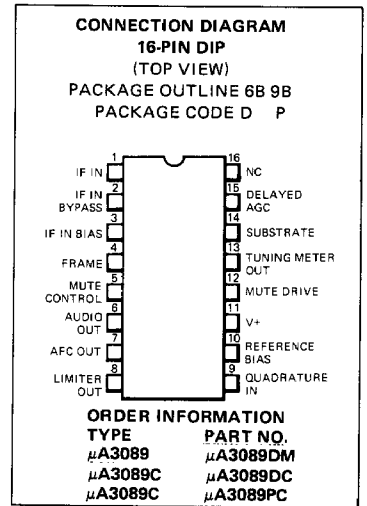

4

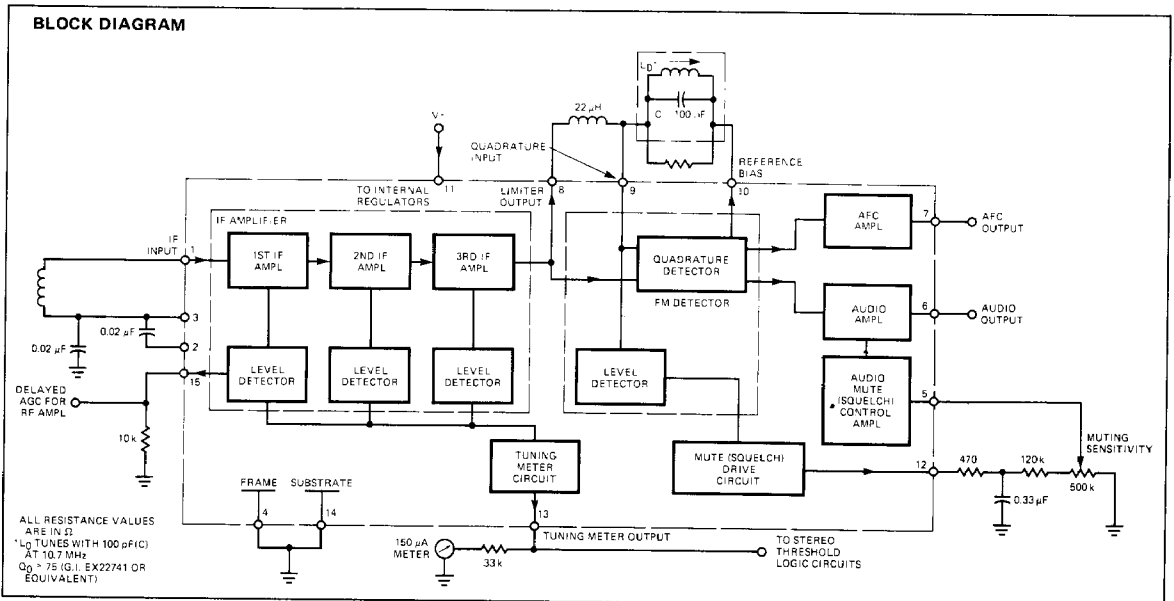

EQUIVALENT CIRCUIT

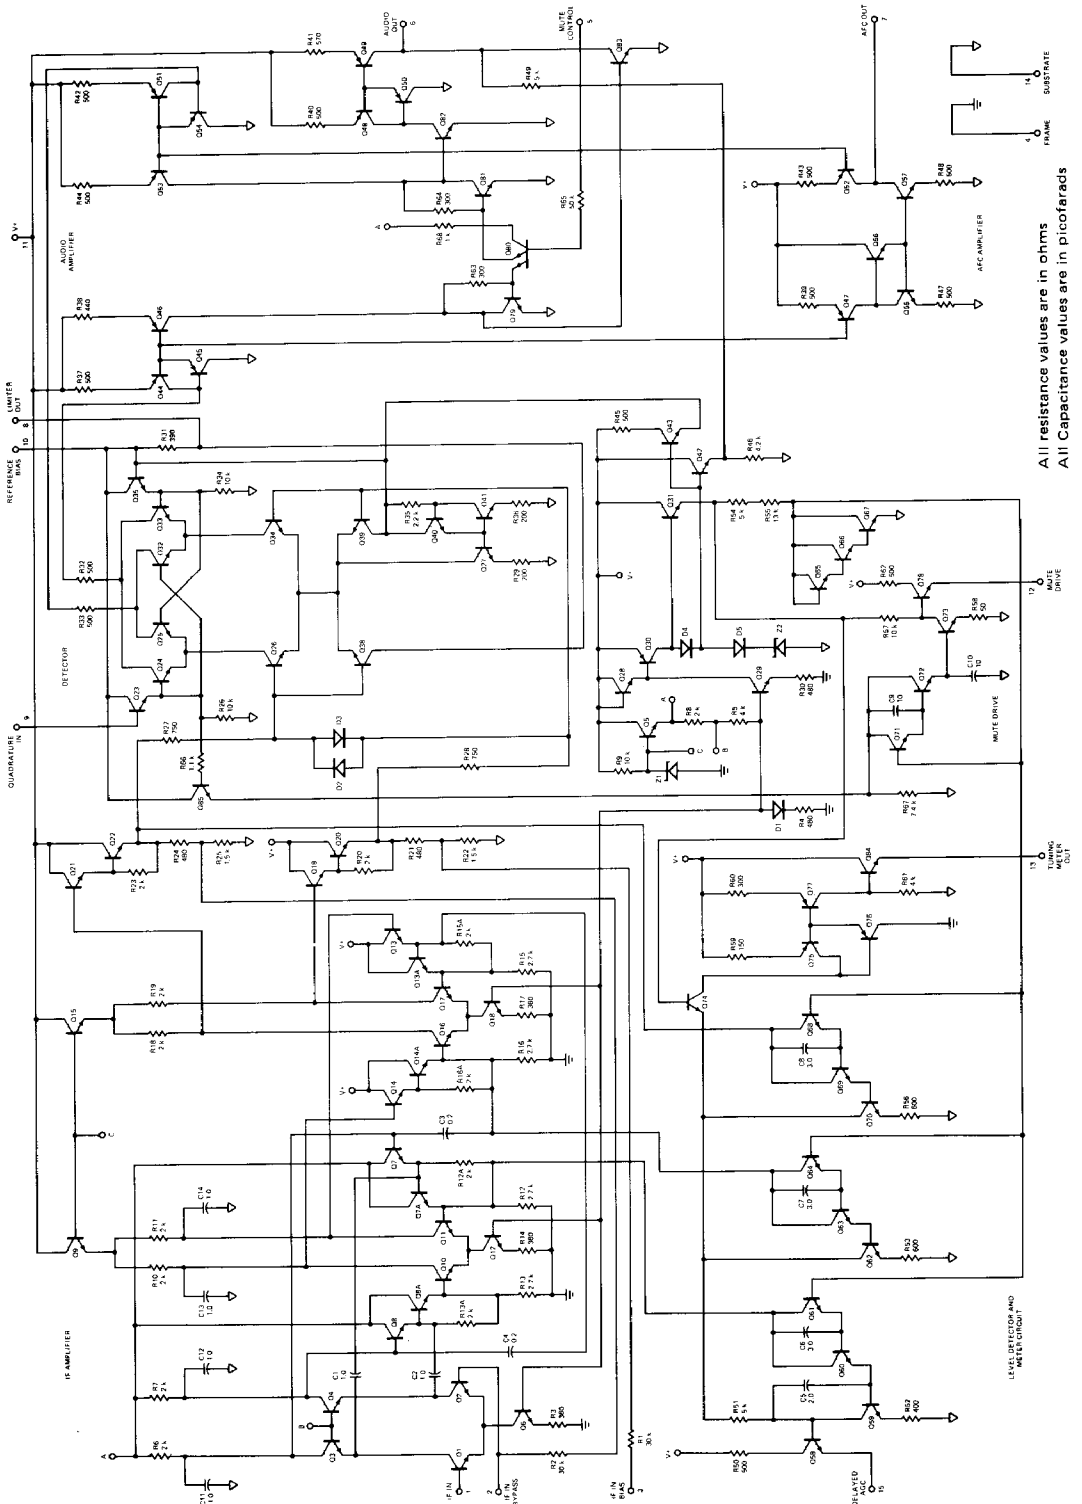

ABSOLUTE MAXIMUM RATINGS

Supply Voltage		
Between Pins 11 and 4		+16V
Between Pins 11 and 14		+16V
DC Current Out of Terminal 15 for AGC		2.0 mA
DC Current Out of Terminals 12 and 13		5.0 mA
Power Dissipation		670 mW
$T_A \leq 85^\circ\text{C}$		
$T_A > 85^\circ\text{C}$		Derate at 10 mW/ $^\circ\text{C}$
Operating Temperature Range		
Military		-55°C to $+125^\circ\text{C}$
Commercial		-40°C to $+85^\circ\text{C}$
Storage Temperature Range		-65°C to $+150^\circ\text{C}$
Pin Temperature (Soldering, 10 s)		260 $^\circ\text{C}$

μ A3089

ELECTRICAL CHARACTERISTICS: $V_+ = 12\text{ V}$, $T_A = -55^\circ\text{C}$ to 125°C (Note 2)

CHARACTERISTICS	CONDITIONS	MIN	TYP	MAX	UNITS
DC CHARACTERISTICS: $V_{IN} = 0$, Non-Muted, Test 1 or 2					
Quiescent Circuit Current	I_{11}			27	mA
DC Voltages at:					
IF Input	V_1	1.2		3.0	V
IF Input Bypass	V_2	1.2		3.0	V
IF Input Bias	V_3	1.2		3.0	V
Audio Output	V_6	5.0		6.5	V
Reference Bias	V_{10}	5.0		6.5	V

AC CHARACTERISTICS: $f_o = 10.7\text{ MHz}$, $f_{MOD} = 400\text{ Hz}$, Deviation = $\pm 75\text{ kHz}$, $V_{IN} = 0.1\text{ V}$, Figure 1 or 2

Input Limiting Voltage (-3 dB Point)				40	μV
AM Rejection (Pin 6)		35			dB
Recovered AF Voltage (Pin 6)		300		600	mV
*Total Harmonic Distortion (Pin 6)				5	%
Single Tuned					
Signal Plus Noise to Noise Ratio		60			dB

*THD Characteristics are mainly a function of the phase characteristics of the circuit connected between pins 8, 9 and 10.
NOTE 2: Full Temperature Range Performance Guaranteed by 25°C Testing.

μ A3089C

ELECTRICAL CHARACTERISTICS: $T_A = 25^\circ\text{C}$, $V_+ = 12\text{ V}$

CHARACTERISTICS	CONDITIONS	MIN	TYP	MAX	UNITS
DC CHARACTERISTICS: $V_{IN} = 0$, Non-Muted, Test Circuit 1 or 2					
Quiescent Circuit Current	I_{11}		23	30	mA
DC Voltages at:					
IF Input	V_1	1.2	1.9	2.4	V
IF Input Bypass	V_2	1.2	1.9	2.4	V
IF Input Bias	V_3	1.2	1.9	2.4	V
Audio Output	V_6	5.0	5.6	6.0	V
Reference Bias	V_{10}	5.0	5.6	6.0	V
AC CHARACTERISTICS: $f_o = 10.7\text{ MHz}$, $f_{MOD} = 400\text{ Hz}$, Deviation = $\pm 75\text{ kHz}$, $V_{IN} = 0.1\text{ V}$, Figure 1 or 2, unless otherwise stated					
Input Limiting Voltage (-3 dB Point)	$V_{IN} = \text{Parameter}$		12	25	μV
AM Rejection (Lead 6)	400 Hz, 30% MOD	45	55		dB
Recovered AF Voltage (Lead 6)		300	400	500	mV
*Total Harmonic Distortion (Lead 6)					
Single Tuned	See Fig. 1		0.5	1.0	%
Double Tuned	See Fig. 2		0.1		%
Signal Plus Noise to Noise Ratio		60	67		dB

*THD Characteristics are mainly a function of the phase characteristics of the circuit connected between pins 8, 9 and 10.

4

μ A3089
TEST CIRCUITS

TEST CIRCUIT USING
A SINGLE TUNED DETECTOR COIL

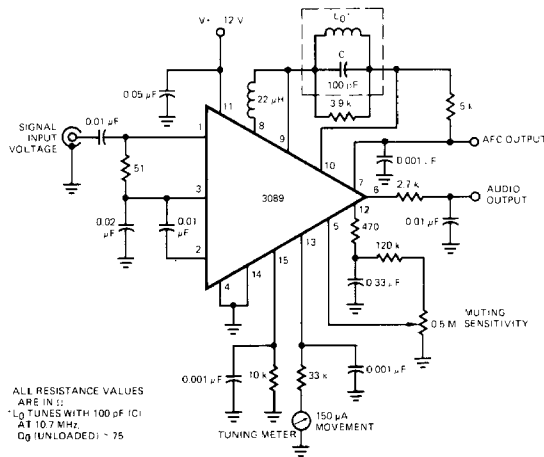


Fig. 1

TEST CIRCUIT USING
A DOUBLE TUNED DETECTOR COIL


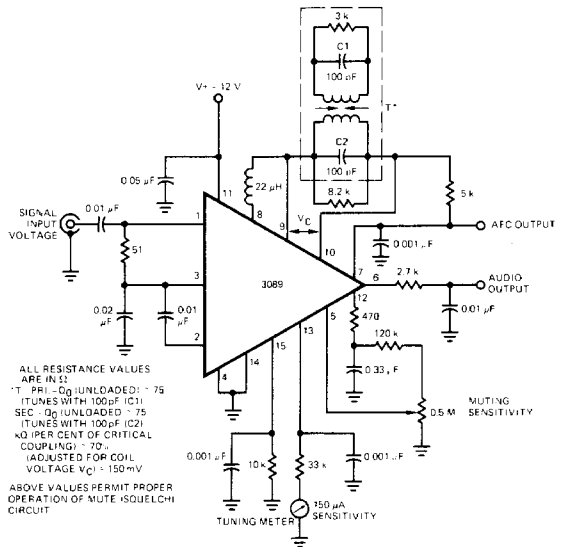


Fig. 2

TYPICAL FM SUBSYSTEM USING THE μ A3089
WITH A SINGLE TUNED DETECTOR COIL

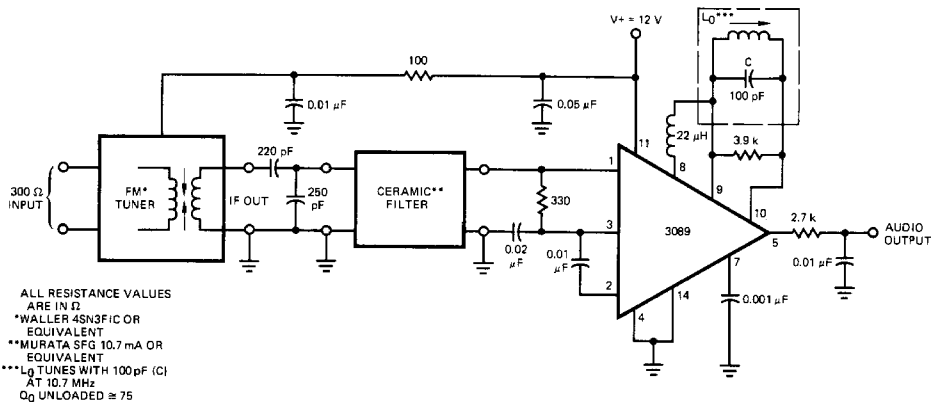

Performance data at $f_0 = 98$ MHz, $f_{MOD} = 400$ Hz,
Deviation = ± 75 kHz:

- 3 dB Limiting Sensitivity 2 μ V (Antenna Level)
- 20 dB Quieting Sensitivity 1 μ V (Antenna Level)
- 30 dB Quieting Sensitivity 1.5 μ V (Antenna Level)
- Alternate channel rejection 60 dB

Fig. 3

TYPICAL PERFORMANCE CURVES FOR μ A3089

MUTING ACTION, TUNER AGC, AND TUNING METER OUTPUT AS A FUNCTION OF INPUT SIGNAL VOLTAGE

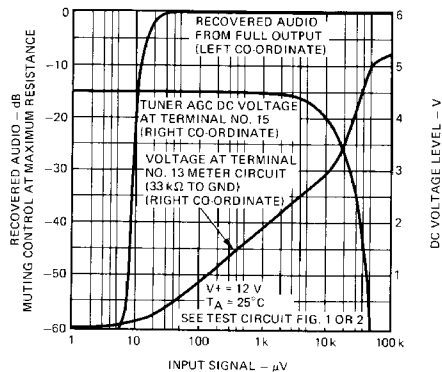


Fig. 4

AFC CHARACTERISTICS (CURRENT AT TERM. 7 AS A FUNCTION OF CHANGE IN FREQUENCY)

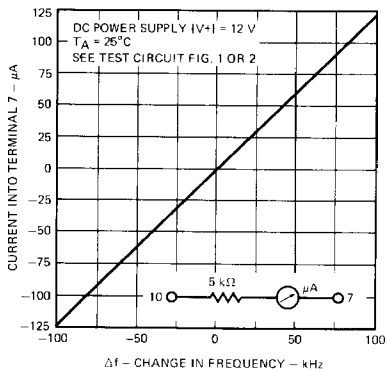


Fig. 5