

# X20(c)DO6529

## 1 General information

The module is equipped with 6 relay outputs.

- 6 digital outputs
- Relay module for 115 VAC
- 6 normally open contacts
- Single-channel isolated outputs

### Danger!

**Risk of electric shock!**

**The terminal block must only be allowed to conduct voltage when it is inserted. It must not under any circumstances be removed or inserted when voltage is applied or have voltage applied to it when it is removed.**

### Danger!

**Die Spannungsklassen auf der Feldklemme dürfen nicht vermischt werden! Es ist ausschließlich der Betrieb bei Netzspannung (z. B. 115 VAC) ODER bei Sicherheitskleinspannung (z. B. 24 VDC SELV) erlaubt.**

## 2 Coated modules

Coated modules are X20 modules with a protective coating for the electronics component. This coating protects X20c modules from condensation and corrosive gases.

The modules' electronics are fully compatible with the corresponding X20 modules.

**For simplification purposes, only images and module IDs of uncoated modules are used in this data sheet.**

The coating has been certified according to the following standards:

- Condensation: BMW GS 95011-4, 2x 1 cycle
- Corrosive gas: EN 60068-2-60, method 4, exposure 21 days



## 3 Order data

Order number	Short description	Figure
	<b>Digital outputs</b>	
X20DO6529	X20 digital output module, 6 relays, normally open contacts, 115 VAC / 0.5 A, 30 VDC / 1 A	
X20cDO6529	X20 digital output module coated, 6 relays, normally open contacts, 115 VAC / 0.5 A, 30 VDC / 1 A	
	<b>Required accessories</b>	
	<b>Bus modules</b>	
X20BM11	X20 bus module, 24 VDC keyed, internal I/O power supply connected through	
X20BM15	X20 bus module, with node number switch, 24 VDC keyed, internal I/O power supply connected through	
X20cBM11	X20 bus module, coated, 24 VDC keyed, internal I/O power supply connected through	
	<b>Terminal blocks</b>	
X20TB12	X20 terminal block, 12-pin, 24 VDC keyed	

Table 1: X20DO6529, X20cDO6529 - Order data

## 4 Technical data

Order number	X20DO6529	X20cDO6529
<b>Short description</b>		
I/O module	6 digital outputs 30 VDC / 115 VAC, outputs single-channel isolated	
<b>General information</b>		
B&R ID code	0x2019	0xE751
Status indicators	I/O function per channel, operating state, module status	
Diagnostics		
Module run/error	Yes, using LED status indicator and software	
Outputs	Yes, using LED status indicator	
Power consumption		
Bus	1.1 W	
Internal I/O	-	
Additional power dissipation caused by actuators (resistive) [W] <sup>1)</sup>	+0.45	
Certifications		
CE	Yes	
ATEX	Zone 2, II 3G Ex nA nC IIA T5 Gc IP20, Ta (see X20 user's manual) FTZU 09 ATEX 0083X	
UL	cULus E115267 Industrial control equipment	
HazLoc	cCSAus 244665 Process control equipment for hazardous locations Class I, Division 2, Groups ABCD, T5	
DNV	Temperature: <b>B</b> (0 - 55°C) Humidity: <b>B</b> (up to 100%) Vibration: <b>B</b> (4 g) EMC: <b>B</b> (bridge and open deck)	
LR	ENV1	
KR	Yes	
ABS	Yes	
EAC	Yes	
KC	Yes	-
<b>Digital outputs</b>		
Variant	Relay / Normally open contact Channels are single-channel isolated.	
Nominal voltage	30 VDC / 115 VAC	
Max. voltage	125 VAC	
Switching voltage	Max. 110 VDC / 125 VAC	
Rated frequency	DC / 45 to 63 Hz	
Nominal output current	1 A at 30 VDC / 0.5 A at 115 VAC	
Total nominal current	6 A at 30 VDC / 3 A at 115 VAC	
Actuator power supply	External	
Inrush current	Max. 2 A (per channel)	
Contact resistance	75 mΩ at 6 VDC / 1 A	
Switching delay		
0 → 1	≤4 ms	
1 → 0	≤4 ms	
Insulation voltages		
Channel - Bus	Tested at 1500 VAC	
Channel - Channel	Tested at 1000 VAC	
Service life		
Electrical <sup>2)</sup>	Min. 100 x 10 <sup>3</sup> ops.	
Mechanical	Min. 50 x 10 <sup>6</sup> ops. (3 Hz)	
Switching capacity		
Minimum	0.01 mA / 10 mV DC	
Maximum	30 W / 62.5 VA	
Protective circuit		
Internal	None	
External		
AC	RC combination or VDR	
DC	Inverse diode, RC combination or VDR	
<b>Electrical properties</b>		
Electrical isolation	Channel isolated from channel, bus and I/O power supply	
<b>Operating conditions</b>		
Mounting orientation		
Horizontal	Yes	
Vertical	Yes	
Installation elevation above sea level		
0 to 2000 m	No limitation	
>2000 m	Reduction of ambient temperature by 0.5°C per 100 m	

Table 2: X20DO6529, X20cDO6529 - Technical data

Order number	X20DO6529	X20cDO6529
Degree of protection per EN 60529		IP20
<b>Ambient conditions</b>		
Temperature		
Operation		
Horizontal mounting orientation	-25 to 60°C	
Vertical mounting orientation	-25 to 50°C	
Derating		See section "Derating".
Storage	-40 to 85°C	
Transport	-40 to 85°C	
Relative humidity		
Operation	5 to 95%, non-condensing	Up to 100%, condensing
Storage	5 to 95%, non-condensing	
Transport	5 to 95%, non-condensing	
<b>Mechanical properties</b>		
Note	Order 1x terminal block X20TB12 separately. Order 1x bus module X20BM11 separately.	Order 1x terminal block X20TB12 separately. Order 1x bus module X20cBM11 separately.
Pitch		12.5 <sup>+0.2</sup> mm

Table 2: X20DO6529, X20cDO6529 - Technical data


- 1) Number of outputs x Contact resistance x Nominal output current<sup>2</sup>. For a calculation example, see section "Mechanical and electrical configuration" in the X20 system user's manual.  
 2) With resistive load. See also section "Electrical service life".

## 5 Status LEDs


For a description of the various operating modes, see section "Additional information - Diagnostic LEDs" in the X20 system user's manual.

Figure	LED	Color	Status	Description
	r	Green	Off	Module supply not connected
	r	Green	Single flash	RESET mode
	r	Green	Blinking	PREOPERATIONAL mode
	r	Green	On	RUN mode
	e	Red	Off	Module supply not connected or everything OK
	e	Red	On	Error or reset status
	e + r	Red on / Green single flash		Invalid firmware
	1 - 6	Orange		Output status of the corresponding digital output


## 6 Pinout

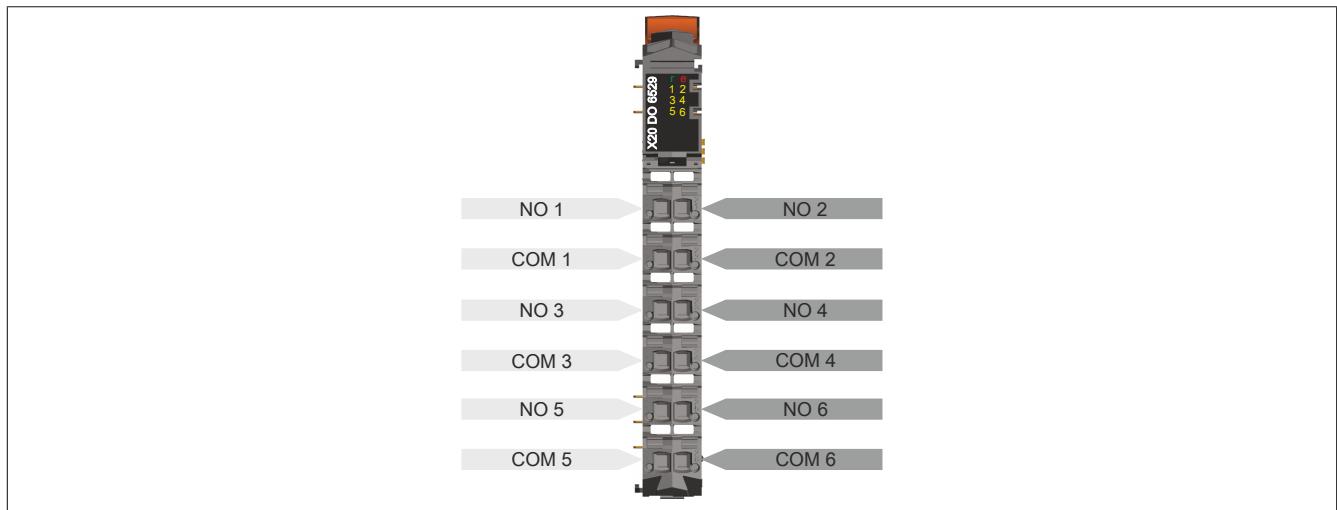


## 7 Connection example

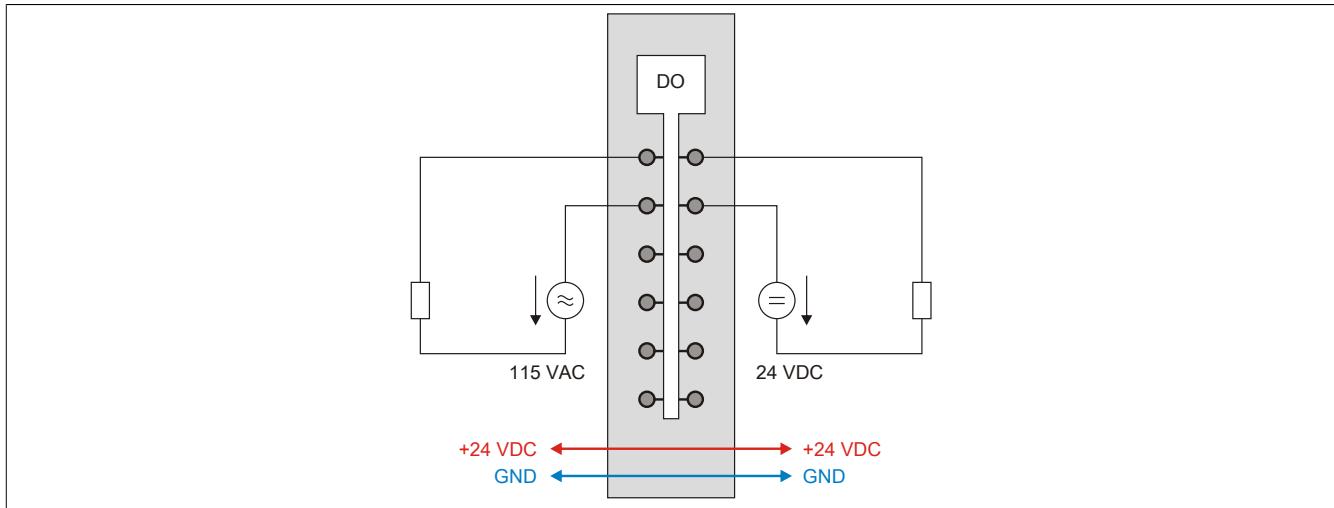


## 8 Output circuit diagram

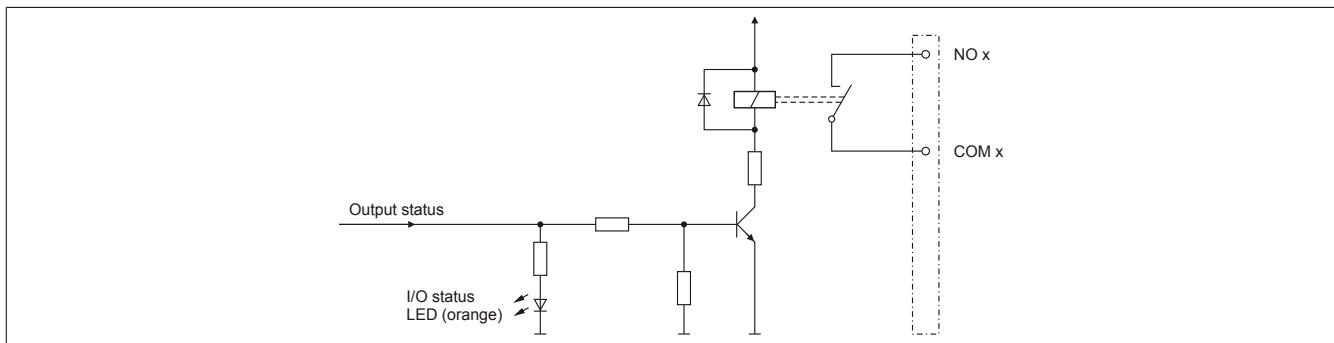

## 9 Maximum switching power

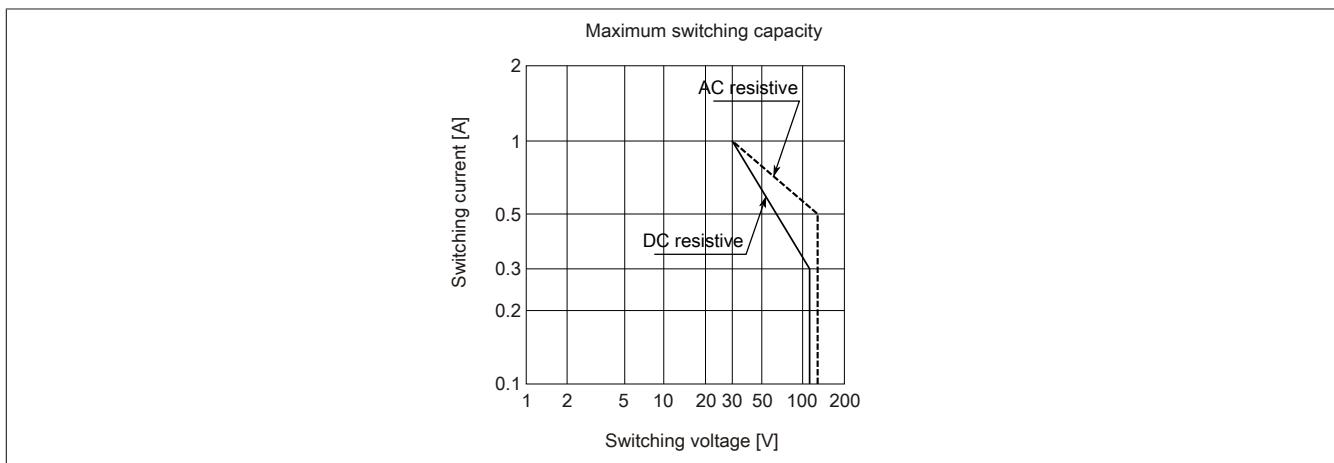

## 10 Electrical service life

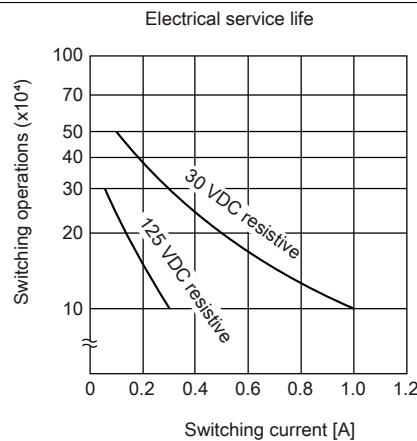

## 11 Derating

There is no derating when operated below 55°C.

During operation over 55°C, the power dissipation of the modules to the left and right of this module is not permitted to exceed 1.15 W!

For an example of calculating the power dissipation of I/O modules, see section "Mechanical and electrical configuration - Power dissipation of I/O modules" in the X20 user's manual.

.....	X20 module Power dissipation > 1.15 W	Neighboring X20 module Power dissipation ≤ 1.15 W	This module	Neighboring X20 module Power dissipation ≤ 1.15 W	X20 module Power dissipation > 1.15 W	.....
-------	--	--	-------------	--	--	-------

## 12 Register description

### 12.1 General data points

In addition to the registers described in the register description, the module has additional general data points. These are not module-specific but contain general information such as serial number and hardware variant.

General data points are described in section "Additional information - General data points" in the X20 system user's manual.

### 12.2 Function model 0 - Standard

Register	Fixed offset	Name	Data type	Read		Write	
				Cyclic	Acyclic	Cyclic	Acyclic
2	0	DigitalOutput	USINT			•	
		DigitalOutput01	Bit 0				
		...	...				
		DigitalOutput06	Bit 5				

Fixed modules require their data points to be in a specific order in the X2X frame. Cyclic access occurs according to a predefined offset, not based on the register address.

Acyclic access continues to be based on the register numbers.

### 12.3 Function model 254 - Bus Controller

Register	Offset <sup>1)</sup>	Name	Data type	Read		Write	
				Cyclic	Acyclic	Cyclic	Acyclic
2	0	Switching state of digital outputs 1 to 6	USINT			•	
		DigitalOutput01	Bit 0				
		...	...				
		DigitalOutput06	Bit 5				

1) The offset specifies where the register is within the CAN object.

#### 12.3.1 Using the module on the bus controller

Function model 254 "Bus controller" is used by default only by non-configurable bus controllers. All other bus controllers can use other registers and functions depending on the fieldbus used.

For detailed information, see section "Additional information - Using I/O modules on the bus controller" in the X20 user's manual (version 3.50 or later).

#### 12.3.2 CAN I/O bus controller

The module occupies 1 digital logical slot on CAN I/O.

## 12.4 Digital outputs

The output state is transferred to the output channels with a fixed offset (<60 µs) based on the network cycle (SyncOut).

### 12.4.1 Switching state of digital outputs 1 to 6

Name:

DigitalOutput

DigitalOutput01 to DigitalOutput06

The switching state of digital outputs 1 to 6 are stored in this register.

Only function model 0 - Standard:

Setting "Packed outputs" in the Automation Studio I/O configuration determines whether all bits of this register should be applied individually as data points in the Automation Studio I/O assignment ("DigitalOutput01" to "DigitalOutput0x") or whether this register should be displayed as a single USINT data point ("DigitalOutput").

Data type	Values	Information
USINT	0 to 63	Packed outputs = On
	See bit structure.	Packed outputs = Off or Function model <> 0 - Standard

Bit structure:

Bit	Name	Value	Information
0	DigitalOutput01	0	Digital output 01 reset
		1	Digital output 01 set
...		...	
		0	Digital output 06 reset
		1	Digital output 06 set

## 12.5 Minimum cycle time

The minimum cycle time specifies how far the bus cycle can be reduced without communication errors occurring. It is important to note that very fast cycles reduce the idle time available for handling monitoring, diagnostics and acyclic commands.

Minimum cycle time
100 µs

## 12.6 Minimum I/O update time

The minimum I/O update time specifies how far the bus cycle can be reduced so that an I/O update is performed in each cycle.

Minimum I/O update time
Equal to the minimum cycle time