

**BOA1017P**  
PM Fiber

### Description

Thorlabs' BOA1017P is a high saturation output power, high bandwidth, polarization-maintaining Booster Optical Amplifier. The BOA1017P incorporates a highly efficient InP/InGaAsP Quantum Well (QW) layer structure and a realizable ridge waveguide design. This BOA is housed in a standard 14-pin butterfly package with an integrated thermoelectric cooler (TEC) and thermistor.



### Specifications

$T_{CHIP} = 25\text{ }^{\circ}\text{C}$ ,  $T_{CASE} = 0 - 70\text{ }^{\circ}\text{C}$




BOA1017P				
	Symbol	Min	Typical	Max
Operating Current	$I_{OP}$	-	600 mA	750 mA
Center Wavelength	$\lambda_C$	1290 nm	1310 nm	1330 nm
Optical 3 dB Bandwidth	BW	60 nm	70 nm	-
Saturation Output Power @ -3 dB	$P_{SAT}$	13 dBm	15 dBm	-
Small Signal Gain @ $P_{IN} = -20\text{ dBm}$ , $\lambda = 1312\text{ nm}$	G	17 dB	23 dB	-
Gain Ripple (RMS) @ $I_{OP}$	$\delta G$	-	0.1 dB	0.25 dB
Polarization Extinction Ratio	PER	-	16 dB	-
Noise Figure	NF	-	7.0 dB	9.0 dB
Forward Voltage	$V_F$	-	1.4 V	1.6 V
TEC Operation (Typical / Max @ $T_{CASE} = 25\text{ }^{\circ}\text{C} / 70\text{ }^{\circ}\text{C}$ )				
-TEC Current	$I_{TEC}$	-	0.15 A	1.5 A
-TEC Voltage	$V_{TEC}$	-	0.35 V	4.0 V
-Thermistor Resistance	$R_{TH}$	-	10 k $\Omega$	-

### Performance Plots

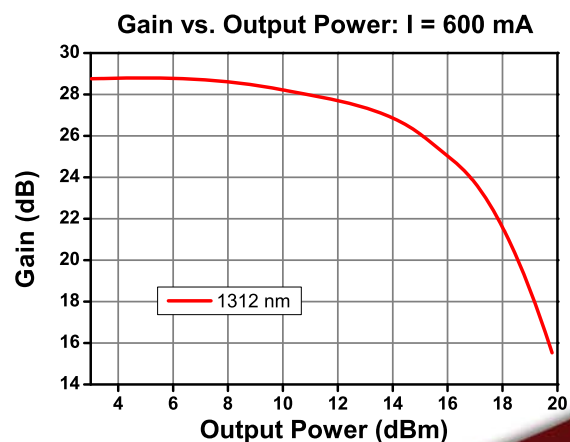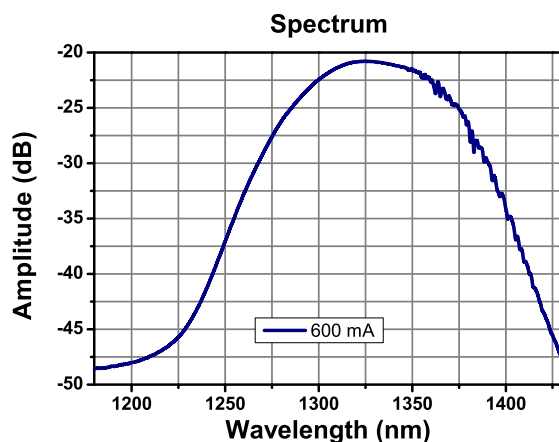

## Drawings

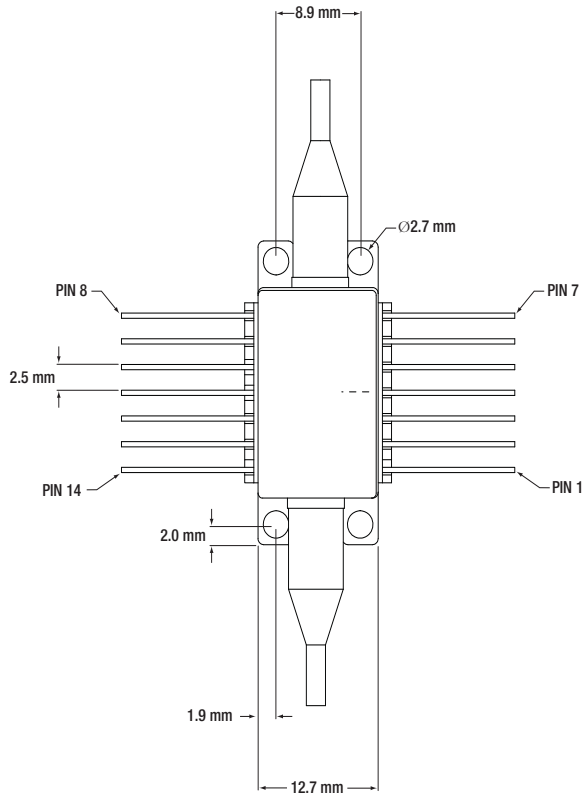

### T. Case

1. TEC +	8. NC
2. Thermistor	9. NC
3. NC	10. Dev Anode
4. NC	11. Dev Cathode
5. Thermistor	12. NC
6. NC	13. Case
7. NC	14. TEC -

