

LOW INPUT CURRENT INFRA-RED EMITTING DIODE & LIGHT ACTIVATED SCR

APPROVALS

- UL recognised, File No. E91231

DESCRIPTION

The IS6051 is an optically coupled isolator consisting of infrared light emitting diode and a light activated silicon controlled rectifier in a standard 6pin dual in line plastic package.


FEATURES

- Options :-
10mm lead spread - add G after part no.
Surface mount - add SM after part no.
Tape&reel - add SMT&R after part no.
- High Isolation Voltage ($5.3kV_{RMS}$, $7.5kV_{PK}$)
- High Surge Anode Current (5.0 A)
- High Blocking Voltage (400V^{*1})
- Low Turn on Current (5mA typical)
- All electrical parameters 100% tested
- Custom electrical selections available


APPLICATIONS

- 10A, T²L compatible, Solid State Relay
- 25W Logic Indicator Lamp Driver
- 400V Symmetrical transistor coupler


OPTION SM
SURFACE MOUNT



OPTION G



Dimensions in mm

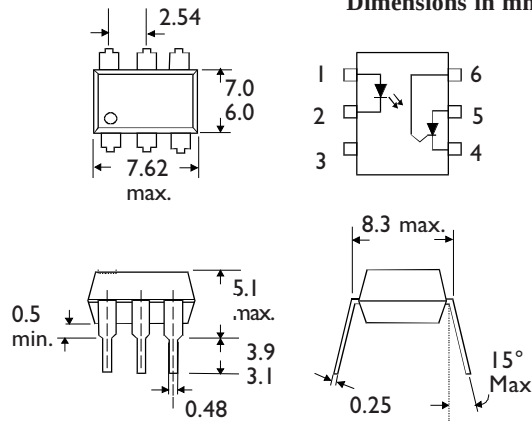

ABSOLUTE MAXIMUM RATINGS (25°C unless otherwise specified)

Storage Temperature	-55°C to + 150°C
Operating Temperature	-55°C to + 100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

INPUT DIODE

Forward Current	60mA
Forward Current (Peak) (1µs pulse, 300pps)	3A
Reverse Voltage	6V
Power Dissipation	100mW

DETECTOR

Peak Forward Voltage IS605	400V ^{*1}
Peak Reverse Gate Voltage	6V
RMS On-state Current	300mA
Peak On-state Current (100µs, 1% duty cycle)	10A
Surge Current (10ms)	5A
Power Dissipation	300mW

^{*1} IMPORTANT : A resistor must be connected between gate and cathode (pins 4 & 6) to prevent false firing ($R_{GK} < 56k\Omega$)

ISOCOM COMPONENTS LTD

Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, Cleveland, TS25 1YD
Tel: (01429) 863609 Fax : (01429) 863581

ISOCOM INC

720 E., Park Boulevard, Suite 104,
Plano, TX 75074 USA
Tel: (972) 423-5521
Fax: (972) 422-4549

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F)	3	1.2	1.5	V	$I_F = 10\text{mA}$
	Reverse Voltage (V_R)				V	$I_R = 10\mu\text{A}$
Output (note 2)	Peak Off-state Voltage (V_{DM})	400			V	$R_{GK} = 10\text{k}\Omega, I_D = 2\mu\text{A}$
	Peak Reverse Voltage (V_{RM})				V	$R_{GK} = 10\text{k}\Omega, I_D = 2\mu\text{A}$
	On-state Voltage (V_{TM})		1.1	1.3	V	$I_{TM} = 300\text{mA}$
	Off-state Current (I_{DM})				μA	$R_{GK} = 10\text{k}\Omega, I_F = 0,$ $V_{DM} = 400\text{V}$
	Reverse Current (I_R)				μA	$R_{GK} = 10\text{k}\Omega, I_F = 0,$ $V_{DM} = 400\text{V}$
Coupled	Input Current to Trigger (I_{FT}) (note 2)			3	mA	$V_{AK} = 100\text{V}, R_{GK} = 27\text{k}\Omega$
	Turn on Time (t_{on})			50	μs	$R_{GK} = 27\text{k}\Omega, I_F = 30\text{mA},$ $V_{AK} = 20\text{V}, R_L = 200\Omega$
	Coupled dv/dt, Input to Output (dv/dt)				V/ μs	
	Input to Output Isolation Voltage V_{ISO}				V_{RMS}	See note 1
	Input-output Isolation Resistance R_{ISO}				V_{PK}	See note 1
	Input-output Capacitance C_f			2	Ω pF	$V_{IO} = 500\text{V}$ (note 1) $V = 0, f = 1\text{MHz}$

Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.