

Printview: Female connector; with straight, long contact pins; 5-pole; with locking levers; Pin spacing 7.5 mm / 0.295 in; 0.6x1 mm; codable; Vertical mounting; with 2 locking latches - Item No.: 232-735/005-000/039-000

**WAGO**® online catalog / eShop

**Female connector; with straight, long contact pins; 5-pole; with locking levers; Pin spacing 7.5 mm / 0.295 in; 0.6x1 mm; codable; Vertical mounting; with 2 locking latches**

Item No.: 232-735/005-000/039-000



Female connector; with straight, long contact pins; 5-pole; with locking levers; Pin spacing 7.5 mm / 0.295 in; 0.6x1 mm; codable; Vertical mounting; with 2 locking latches

## Marking

RoHS ✓  
Compliant

## Business data

Supplier	WAGO
Item no.	232-735/005-000/039-000
GTIN / EAN	4044918571265
Content	1
Order amount	50
Customer item number	

## Notes

*Item description: Pluggable connectors for rail-mounted terminal blocks equipped with CAGE CLAMP® Female connectors with long contact pins connect to the termination ports of 280 Series rail-mounted terminal blocks Female connectors are touch-proof when unmated, providing a pluggable, live output Coding option available*

## Technical data

### Miscellaneous

No. of poles	5
Pin spacing	7.5 mm (0.295 in %)
Color	gray
Ratings according to 1	IEC/EN 60664-1
Rated voltage (III / 3) [V]	500 [V]


Printview: Female connector; with straight, long contact pins; 5-pole; with locking levers; Pin spacing 7.5 mm / 0.295 in; 0.6x1 mm; codable; Vertical mounting; with 2 locking latches - Item No.: 232-735/005-000/039-000

<b>Technical data</b>	
<i>Rated surge voltage (III / 3) [kV]</i>	<i>6 [kV]</i>
<i>Rated voltage (III / 2) [V]</i>	<i>400 [V]</i>
<i>Rated surge voltage (III / 2) [kV]</i>	<i>6 [kV]</i>
<i>Rated surge voltage (II / 2) [kV]</i>	<i>6 [kV]</i>
<i>Nominal current [A]</i>	<i>12 [A]</i>
<i>Number of levels</i>	<i>1</i>
<i>Material group</i>	<i>I</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Flammability rating per UL 94</i>	<i>V0</i>
<i>Limit temperature range</i>	<i>-60 ... 85 C</i>
<i>Contact material</i>	<i>Electrolytic copper (Ecu)</i>
<i>Contact plating</i>	<i>tin-plated</i>
<i>Fire load [MJ]</i>	<i>0.14 [MJ]</i>
<i>Weight [g]</i>	<i>6.94 [g]</i>
<i>Width</i>	<i>50.8 mm / 2 in</i>
<i>Height</i>	<i>32.75 mm / 1.289 in</i>
<i>Height from the surface</i>	<i>18.25 mm / 0.719 in</i>
<i>Length</i>	<i>11.6 mm / 0.457 in</i>

Printview: Female connector; with straight, long contact pins; 5-pole; with locking levers; Pin spacing 7.5 mm / 0.295 in; 0.6x1 mm; codable; Vertical mounting; with 2 locking latches - Item No.: 232-735/005-000/039-000

---

## Images & drawings

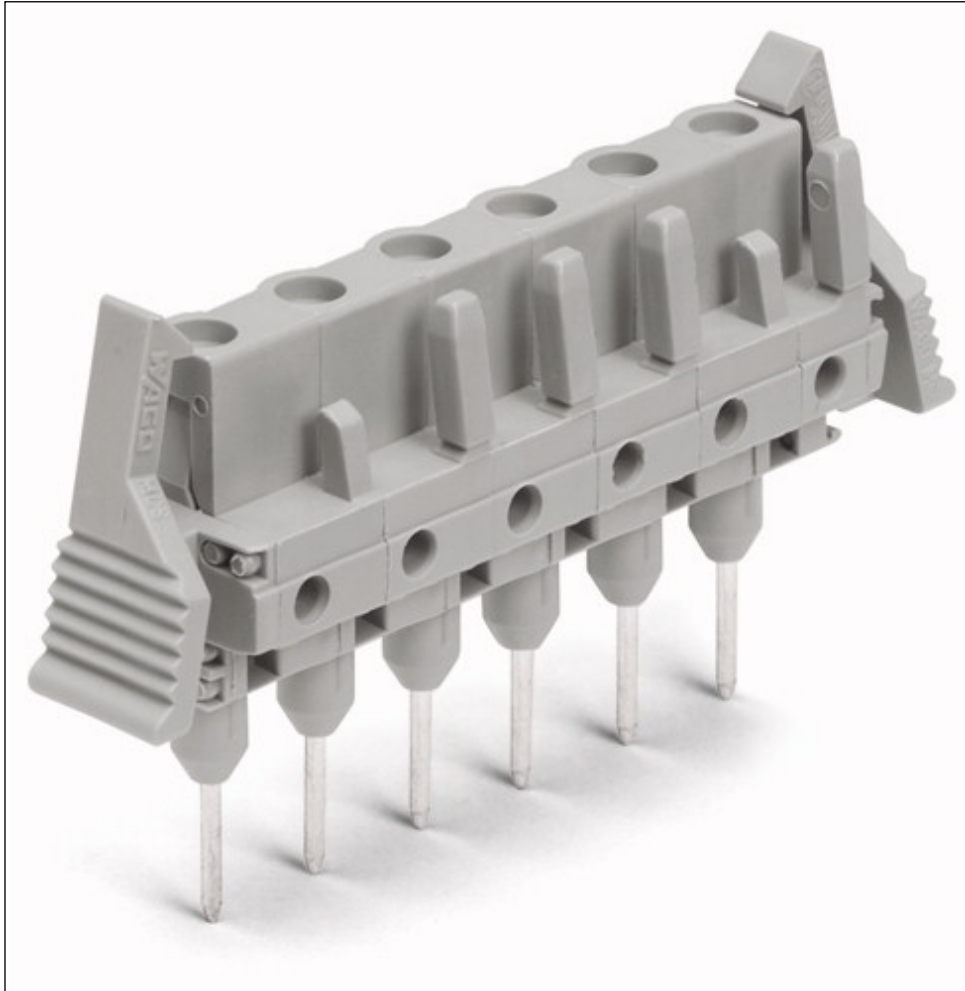

## Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.