


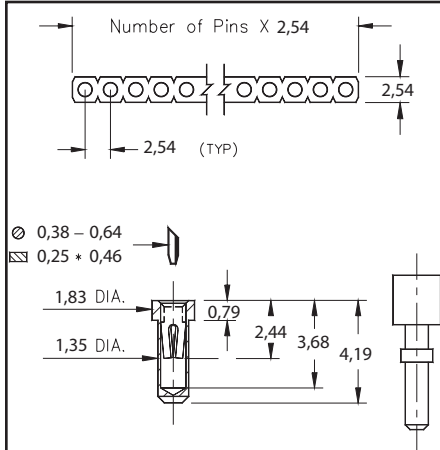


Fig. 1

- Low profile receptacles sit 0,79 above board.
- Series 714 uses M-M# 1401 & 1407 pin receptacles. See page 126 for details.
- Hi-Rel 4-finger BeCu #30 contact is used in the 1401 receptacle and a #11 contact is used in the 1407. Both are rated at 3 amps. See pages 206 & 208 for details.

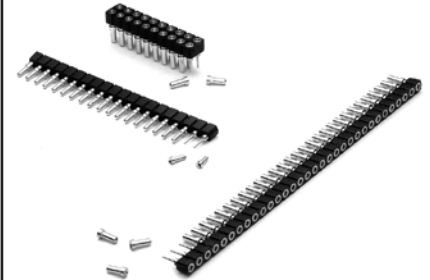

Ordering Information

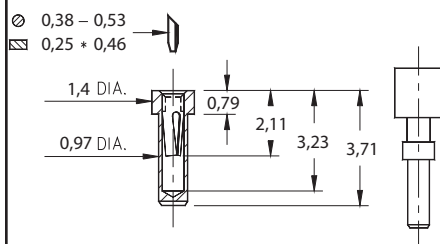


Fig. 2

Fig. 1

Single Row (1,4 min. mounting hole)

714-XX-1__-41-001000
Specify # of pins → 01-64

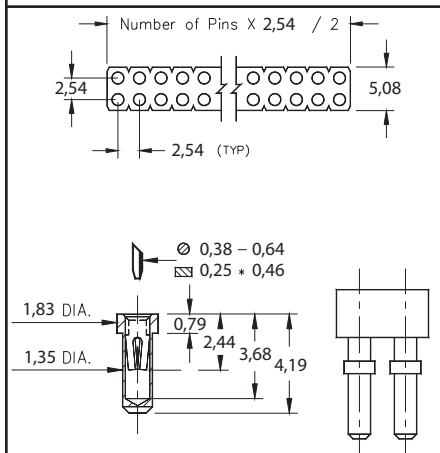


Fig. 3

Fig. 3

Single Row (0,99 min. mounting hole)

714-XX-1__-31-007000
Specify # of pins → 01-64

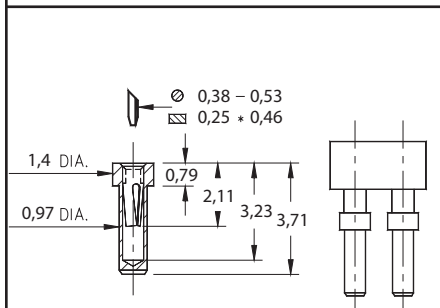


Fig. 4

Fig. 4

Double Row (1,4 min. mounting hole)

714-XX-2__-41-001000
Specify # of pins → 02-64

Double Row (0,99 min. mounting hole)

714-XX-2__-31-007000
Specify # of pins → 02-64

XX=Plating Code
See Below



For RoHS compliance, select $\diamond$ plating code. For the all gold option (XX=13) also change part number from 71X-XX-XXX-X1-00X000 to 71X-13-XXX-X1-00X100

SPECIFY PLATING CODE XX=	13 $\diamond$		93	99		43 $\diamond$	44 $\diamond$
Sleeve (Pin)		0,25 μ m Au	5,08 μ m Sn/Pb	5,08 μ m Sn/Pb		5,08 μ m Sn	5,08 μ m Sn
Contact (Clip)		0,76 μ m Au	0,76 μ m Au	5,08 μ m Sn/Pb		0,76 μ m Au	5,08 μ m Sn