

AM Receiver Circuit

Technology: Bipolar

Features

- Controlled RF preamplifier
- Multiplicative balanced mixer
- Separate oscillator with amplitude control
- IF amplifier with gain control
- Balanced full-wave detector
- Audio preamplifier
- Internal AGC voltage
- Amplifier for field-strength indication
- Electronic stand-by on/off switch

Block Diagram / Application Circuit

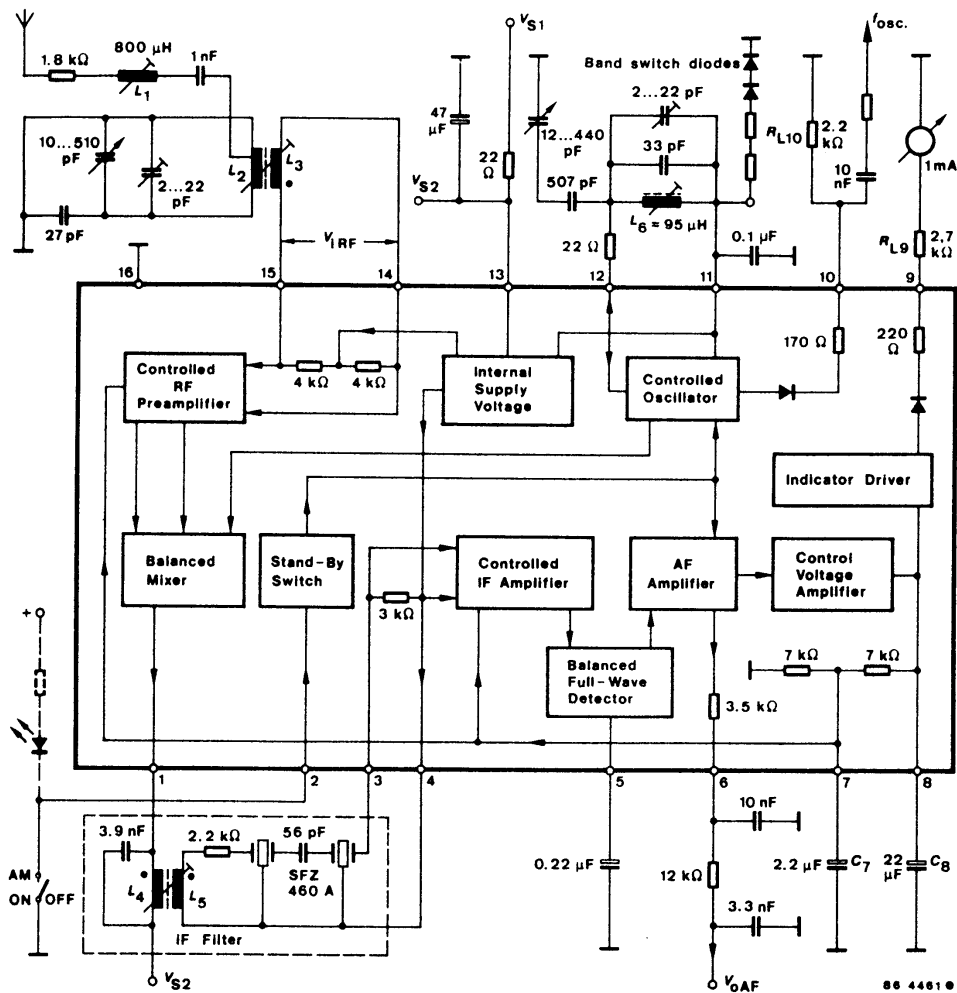


Figure 1. Block diagram and application circuit

Absolute Maximum Ratings

Reference point Pin 16, unless otherwise specified

| Parameters | | Symbol | Value | Unit |
|---------------------------|--------------------|------------------|---------------|------|
| Supply voltage | Pin 13 | V_S | 20 | V |
| Voltage on Pin 2 | | V_2 | 0 to 20 | V |
| RF inputs Voltages | Reference point 15 | $\pm V_{i14/15}$ | 12 | V |
| | Pin 14 | V_i | V_s | V |
| | Pin 14 | $-V_i$ | 0.6 | V |
| | Pin 15 | V_i | V_i | V |
| | Pin 15 | $-V_i$ | 0.6 | V |
| | RF inputs Currents | Pin 14, 15 | $\pm I_i$ | 200 |
| Ambient temperature range | | T_{amb} | - 30 to + 80 | °C |
| Storage temperature range | | T_{stg} | - 55 to + 150 | °C |

Electrical Characteristics

$V_S = 8.5$ V, reference point Pin 16, $f_{IRF} = 1$ MHz, $R_G = 50 \Omega$, $f_{mod} = 0.4$ kHz, $m = 30\%$, $f_{IF} = 460$ kHz, $T_{amb} = +25^\circ\text{C}$, unless otherwise specified

| Parameters | Test Conditions / Pin | Symbol | Min | Type | Max | Unit |
|---|--|---------------|-----|----------------|-----|------------|
| Supply voltage range | Pin 13 | V_S | 7.5 | | 18 | V |
| Supply current | Without load, $I_L = 0$ (Pin 11) Pin 13 | I_S | | 23 | 30 | mA |
| RF preamplifier and mixer | | | | | | |
| DC input voltages | Pin 14, 15 | V_i | | $V_S/2$ | | V |
| Input impedances | $V_{iRF} < 300 \mu\text{V}$, Pin 14,15 | R_i | | 5.5 | | k Ω |
| | | C_i | | 25 | | pF |
| | $V_{iRF} > 10$ mV, Pin 14, 15 | R_i | | 8.0 | | k Ω |
| | | C_i | | 22 | | pF |
| Output impedance | Pin 1 | R_O | 500 | | | k Ω |
| | | C_O | | 6.0 | | pF |
| Maximum conversion conductance | I_{O1IF}/V_{iRF} | ΔS_M | | | 6.5 | mA/V |
| Maximum IF output voltage | Pin 1 | $V_{OIF(PP)}$ | | | 5.0 | V |
| Output current | Pin 1 | I_O | | 1.2 | | mA |
| Preamplifier control range | | S_M | | 30 | | dB |
| Max. RF input voltage | Pin 14, 15 | $V_{i(PP)}$ | | | 2.5 | V |
| Oscillator | | | | | | |
| Frequency range | Pin 12 | f_{OSC} | 0.6 | | 60 | MHz |
| Oscillator circuit impedance range | Pin 12 | Z_{LOSC} | 0.5 | | 200 | k Ω |
| Controlled oscillator amplitude | Pin 12 | V_{OSC} | | 130 | 150 | mV |
| DC output voltage | $I_L = 0$ V Pin 11 | V_O | | $6 V_{BE(4V)}$ | | V |
| Output load current range | Pin 11 | $-I_L$ | | | 20 | mA |
| Output resistance | $I_L = 5 \pm 0.5$ mA, Pin 11 | R_O | | 25 | | Ω |
| Oscillator frequency output Pin 10 | | | | | | |
| Output voltage | $R_{L10} = 4.7$ k Ω | $V_{O(PP)}$ | | 320 | | mV |
| Output resistance | | R_O | | 170 | | Ω |
| Allowable output current | | $I_{O(P)}$ | | | 3 | mA |

| Parameters | Test Conditions / Pin | Symbol | Min | Type | Max | Unit |
|----------------------------------|---|--------------------------------|----------|--------|------------|------------------|
| IF amplifier an AF stage | | | | | | |
| DC input voltages | Pin 3, 4 | V_i | | 2 | | V |
| Input impedance | Pin 3 | R_i C_i | 2.4 | 3 7 | 3.9 | k Ω pF |
| Max. IF input voltage | m = 80%, d = 3% Pin 3 | V_i | | 90 | | mV |
| Control range | $V_{0AF} = -6$ dB | ΔV_i | | 61 | | dB |
| Audio output voltage | $V_i = 1$ mV (Pin 3), without load, Pin 6 | V_O | | 310 | | mV |
| Audio output resistance | Pin 6 | R_O | | 3.5 | | k Ω |
| Field-strength indication | | | | | | |
| Pin 9 | | | | | | |
| DC indicator voltages | $R_{L9} = 2.7$ k Ω , $V_i = 0$ $R_{L9} = 2.7$ k Ω , $V_i = 500$ mV | V_O V_O | 0 2.5 | 2.8 | 140 3.1 | mV V |
| Output current capability | | $-I_O$ | 2.0 | | | mA |
| Output resistance | $-I_0 = 0.5$ mA | R_O | | 220 | | Ω |
| Reverse voltage at the output | AM switch-off, $\pm I_0 \leq 1$ μ A | V_O | | 6 | | V |
| Stand-by switch | | | | | | |
| Pin 2 | | | | | | |
| Switching voltage | | V_i | | 2.75 | | V |
| Required control voltage | AM ON AM OFF | V_i V_i (or open input) | 3.5 | | 2 | V |
| Input current | AM on, switching current AM off, reverse current ($V_2 = V_3$) | $-I_i$ $\pm I_i$ | | | 200 10 | μ A |

Operating Conditions

$V_S = 8.5$ V, $f_{iRF} = 1$ MHz, $f_{mod} = 0.4$ kHz, m = 30%, $T_{amb} = 25^\circ$ C, reference point Pin 16, see figure 2, unless otherwise specified

| Parameters | Test Conditions / Pin | Symbol | Min | Type | Max | Unit |
|---|--|---------------------|-----|--|-----|---------|
| RF input voltages | (S + N)/N = 6 dB = 26 dB = 46 dB | V_{iRF} | | 1.5 15 150 | | μ V |
| RF input for agc operation | | V_{iRF} | | 30 | | μ V |
| Control range for (Reference value $V_i = 500$ mV) | $\Delta V_0 = 6$ dB $\Delta V_0 = 1$ dB | ΔV_{iRF} | | 91 86 | | dB |
| Maximum RF input voltage | d = 3%, m = 80% d = 3%, m = 30% d = 10%, m = 30% | V_{iRF} | | 0.5 0.7 0.9 | | V |
| Audio output voltage | $V_1 = 1$ mV $V_2 = 4$ μ V, m = 0.8 | V_{0AF} | | 310 (± 2 dB) 130 (± 3.5 dB) | | mV |
| RF input voltage | $V_{0AF} = 60$ mV | V_{iRF} | | 5.5 | | μ V |
| Total distortion of audio output voltage | m = 80%, $V_i = 1$ mV $V_i = 500$ mV | d | | 0.5 3.0 | | % |
| Signal plus noise to noise ratio of audio output voltage | $V_i = 1$ mV | $\frac{(S + N)}{N}$ | | 50 | | dB |
| IF bandwidth (-3 dB) | | B_{iF} | | 4.6 | | kHz |
| IF selectively | $\Delta f = \pm 9$ kHz $\Delta f = \pm 36$ kHz | S_{iF} | | 30 60 | | dB |

Test Circuit

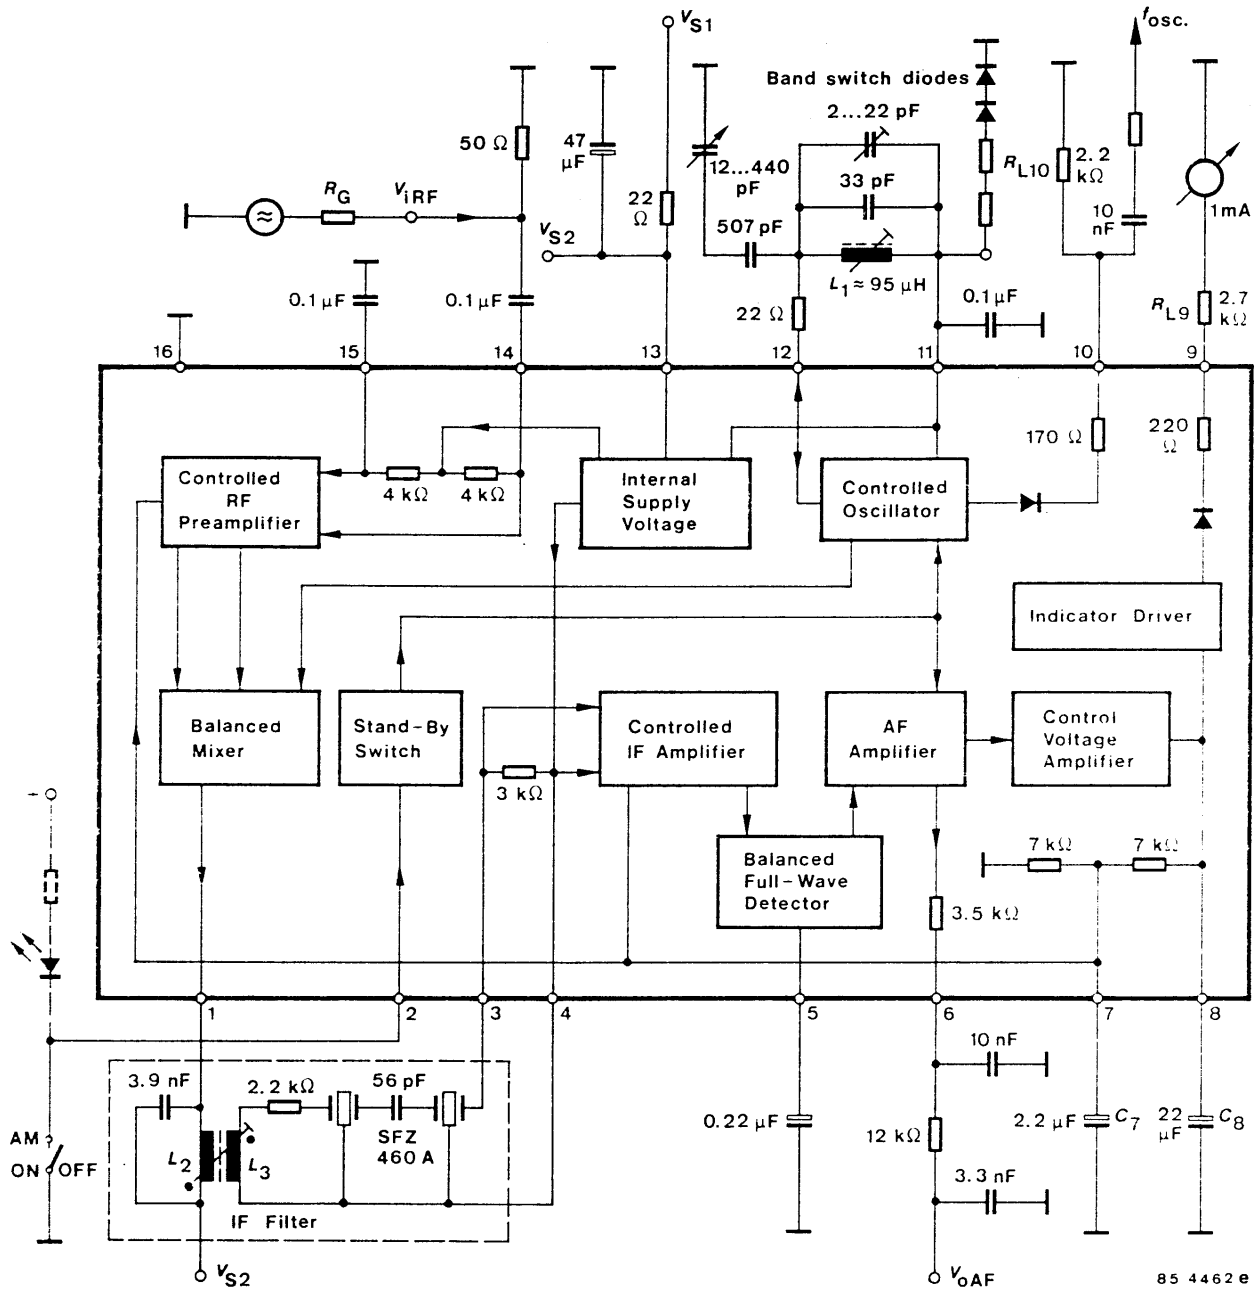


Figure 2. Test circuit

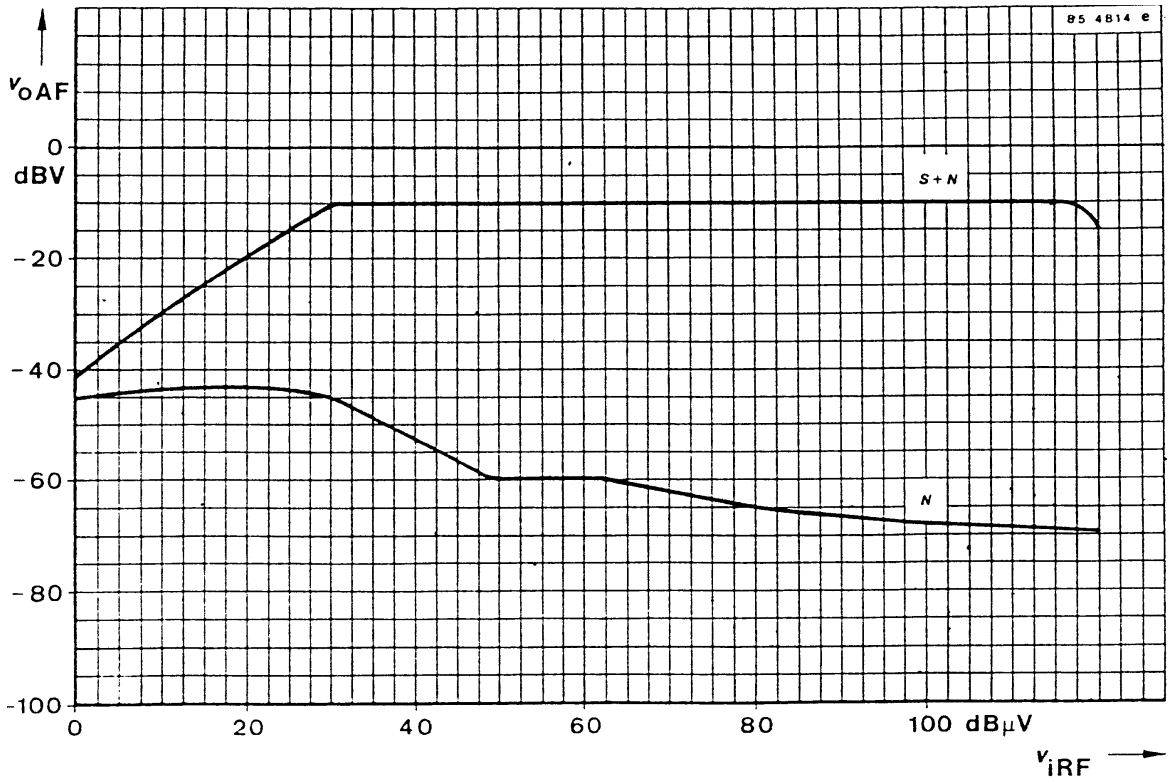


Figure 3.

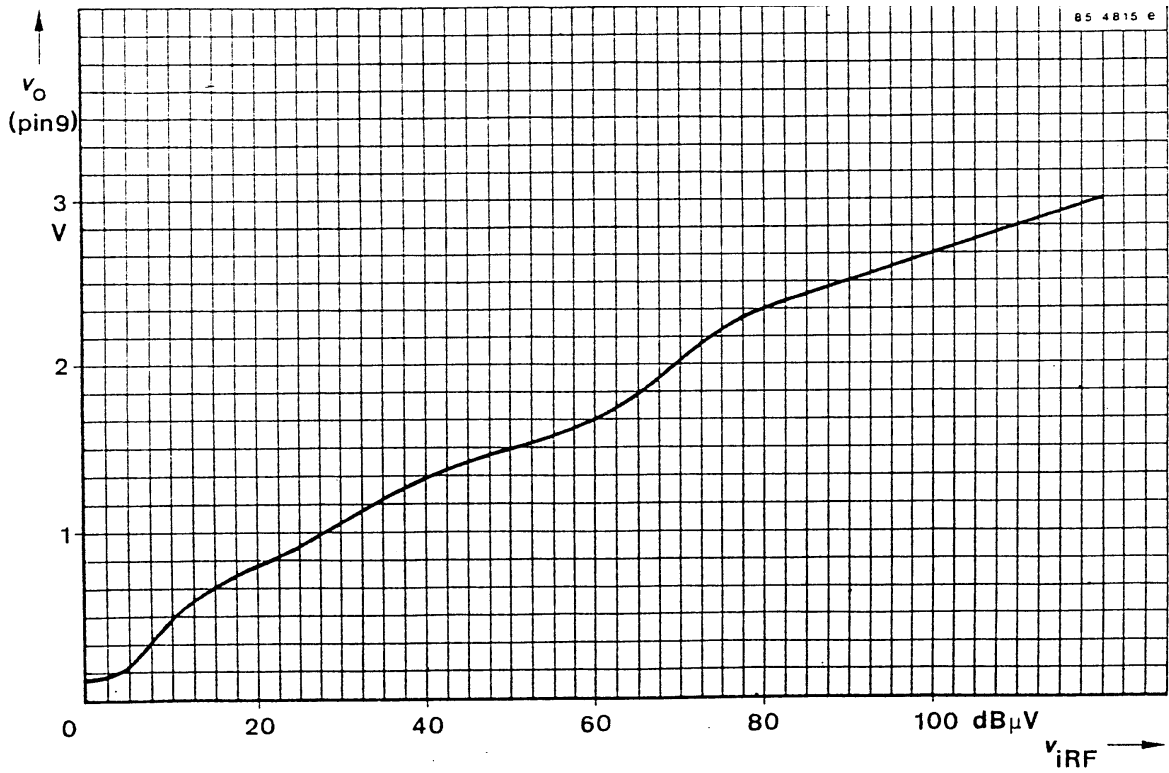


Figure 4.


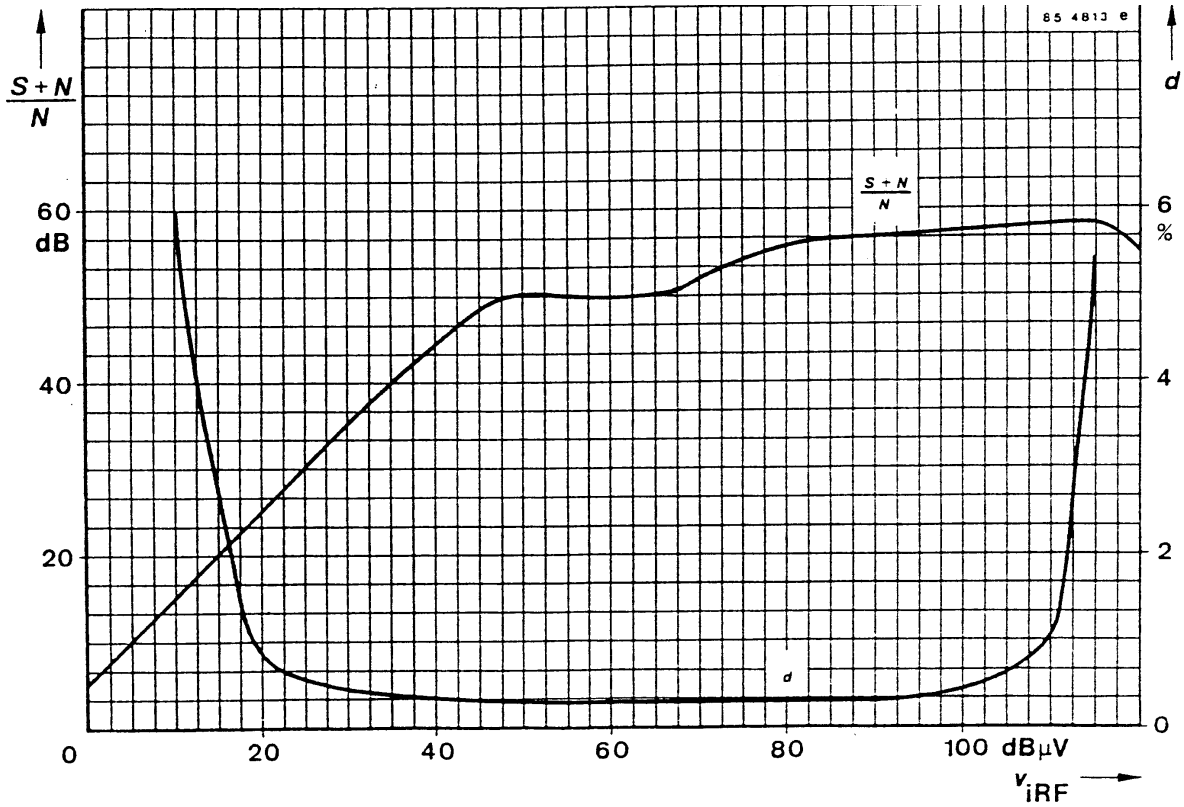


Figure 5.

Package Information

Package SO16
Dimensions in mm

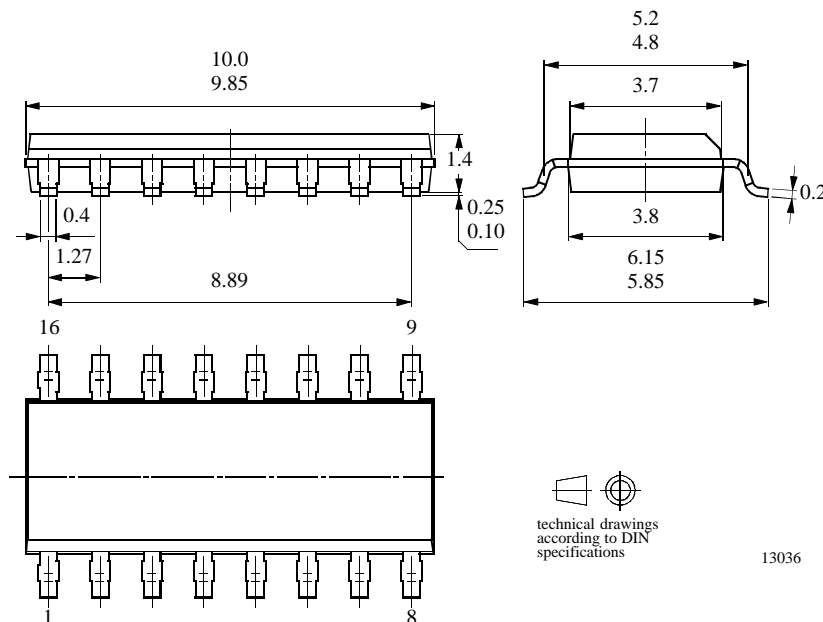

Ozone Depleting Substances Policy Statement

It is the policy of **Atmel Germany GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Atmel Germany GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Atmel Germany GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Atmel Wireless & Microcontrollers products for any unintended or unauthorized application, the buyer shall indemnify Atmel Wireless & Microcontrollers against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Data sheets can also be retrieved from the Internet: <http://www.atmel-wm.com>

Atmel Germany GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany
Telephone: 49 (0)7131 67 2594, Fax number: 49 (0)7131 67 2423