




Terminals & Splices > Quick Disconnects

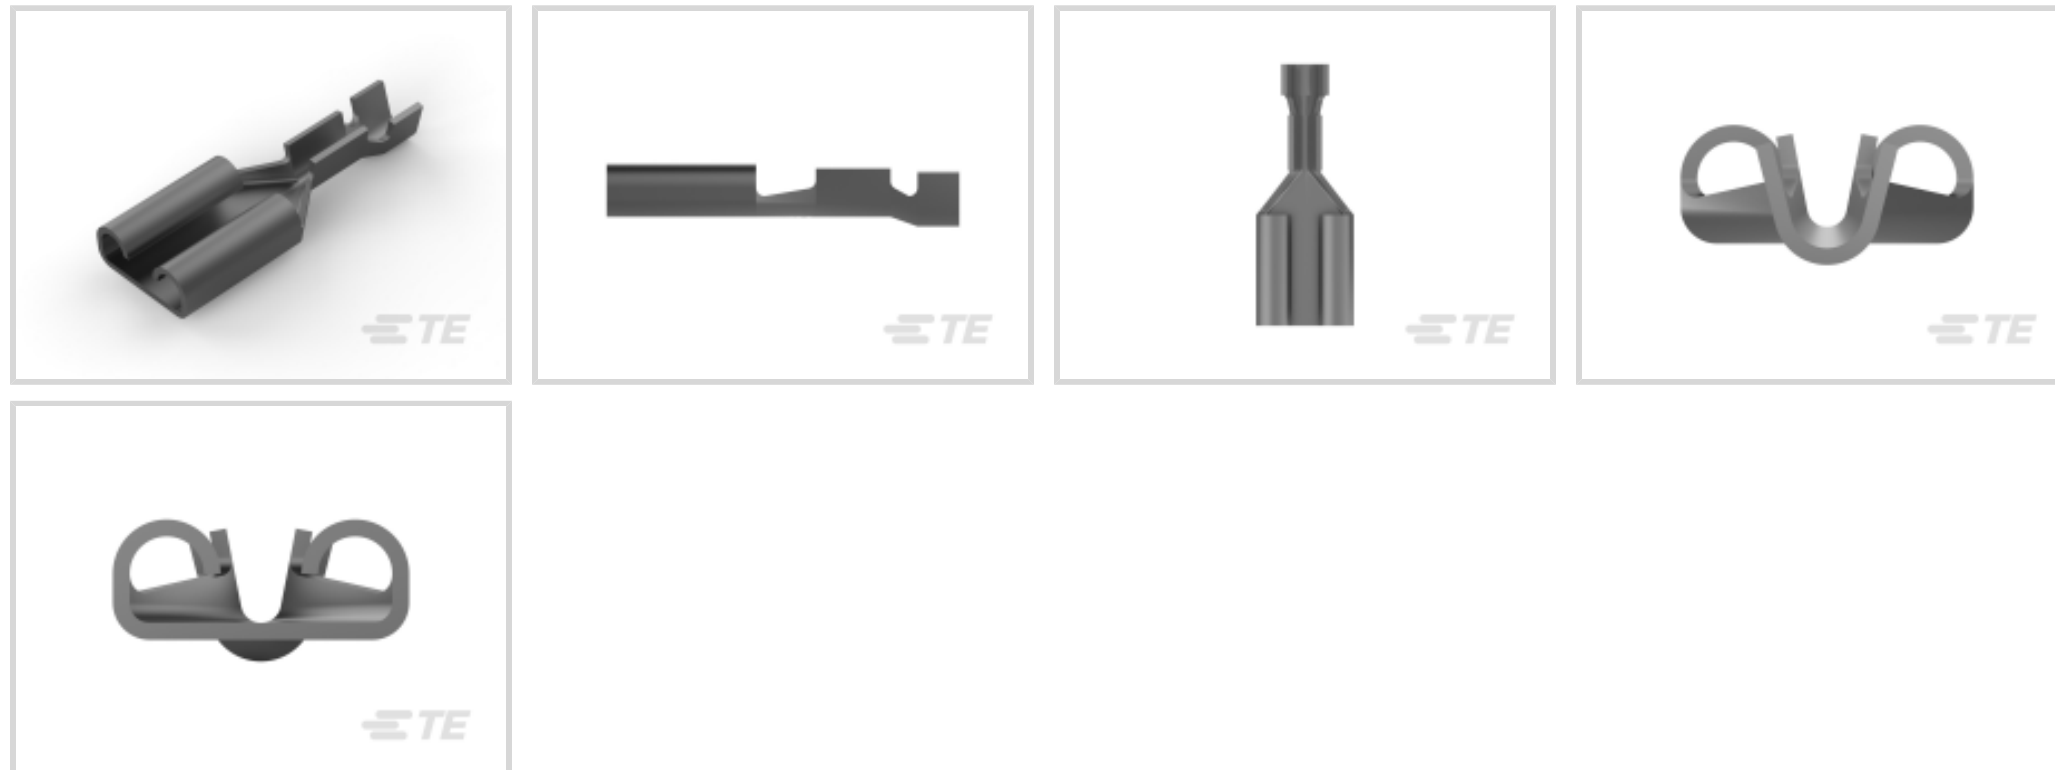

Terminal & Splice Type: **Receptacle**

Wire Size: .2 – .51 mm²

Mating Tab Width: 4.75 mm [.187 in]

Mating Tab Thickness: .51 mm [.02 in]

Features

Product Type Features

Wire Stop	No
Wire/Cable Type	Regular Wire
Terminates To	Wire & Cable
Insertion Force	Normal
Sealable	No
Insulated	No

Configuration Features

Connection Capacity	Single
---------------------	--------

Body Features

Fully Insulated	No
Plating Material	Tin

Contact Features

Terminal Type	Receptacle
Terminal & Splice Type	Receptacle
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze

Crimp Type	F-Crimp
Barrel Type	Open

Mechanical Attachment

Mating Retention Type	Dimple
Wire Insulation Support	With

Dimensions

Accepts Wire Insulation Diameter Range	1.02 – 1.78 mm [.04 – .07 in]
Overall Length	14.86 mm [.585 in]
Receptacle Terminal Stock Thickness	.3 mm [.012 in]
Wire Size	.2 – .51 mm ²
Mating Tab Width	4.75 mm [.187 in]
Mating Tab Thickness	.51 mm [.02 in]

Usage Conditions

Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]
-----------------------------	-----------------------------

Industry Standards

UL Rating	Listed
-----------	--------

Packaging Features

Packaging Quantity	20000
Packaging Method	Strip/Reel

Other

Line	Premier
------	---------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2019 (197) Candidate List Declared Against: JAN 2019 (197)
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Part # 7-2150072-7
OCEAN_2.0_SPARE_PART_KIT-055F080F



TE Part # 2150072-1
OCEAN_2.0_APPLICATOR-E-055F080F



TE Part # 2150072-2
OCEAN_2.0_APPLICATOR-E-055F080FA



TE Part # 2-2150072-2
OCEAN_2.0_APPLICATOR-E-055F080FA



TE Part # 2-2150072-1
OCEAN_2.0_APPLICATOR-E-055F080F


Also in the Series | FASTON 187




Crimp Terminal Housings (33)



Insulation Boots & Sleeves (7)



PCB Terminals(44)



Quick Disconnects(224)



Splices(1)

Customers Also Bought



TE Part #1969507-4
250 FAST FLG RCPT HSG
NAT V2 GWT



TE Part #2005249-9
PDL 2P CAP 3.96 P/M
(GWT) BLK



TE Part #316088-2
2.5MM SIGNAL DBL LOCK
4P CAP H



TE Part #1803006-8
CRIMPER, WIRE F



TE Part #1803615-7
ANVIL, COMBINATION,
END FEED



TE Part #1969453-6
HSG, RECP, POSI-
LOCK&STD FAST250



TE Part #2-1803059-7
ANVIL COMBINATION,
END FEED



TE Part #2321920-3
PERIMETER SEAL PLUG
HOUSING 3PIN



TE Part #2321922-3
REAR WIRE SEAL 3PIN



TE Part #2321922-4
REAR WIRE SEAL 4PIN

Documents

Product Drawings

[FASTON 187 20-24AWG TPPHBRZ](#)

English

CAD Files

[Customer View Model](#)

[ENG_CVM_CVM_62187-2_R.2d_dxf.zip](#)

English

[3D PDF](#)



3D

Customer View Model

[ENG_CVM_CVM_62187-2_R.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_62187-2_R.3d_stp.zip](#)

English

Datasheets & Catalog Pages

[82004 FASTON Terminals \(Insulated and Uninsulated\) Catalog - FASTON Receptacles Section](#)

English

Product Specifications

[Application Specification](#)

English

[Wire Preparation And Crimp Inspection Guide](#)

English

[Application Specification](#)

English

Product Environmental Compliance

[TE Material Declaration](#)

English

Agency Approvals

[UL Report](#)

English