


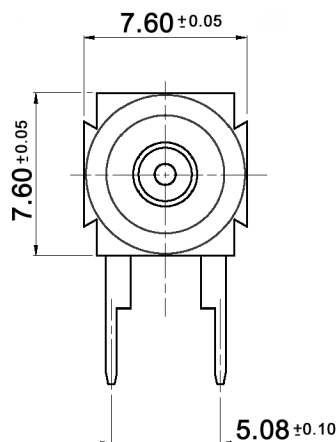
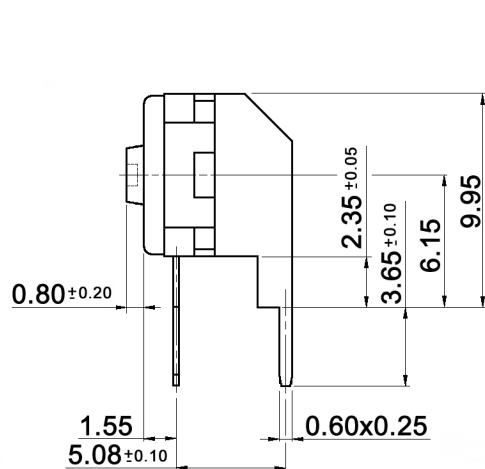






DRILLING PLAN




KTT 217



Specifications:

Contact rating: 20mA, 24V DC; max. 0.5W
 Contact resistance: 100mOhm max.
 Insulation resistance: 1 000MOhm min. at 100V DC
 Dielectric strength: 250V, 50Hz for the duration of 1 minute
 Operating temperature: -40°C to +85°C
 Mechanical life: min. 1 000 000 cycles
 Operating force: 4.5 +/-1.0N
 Travel: 0.75 +/-0.25mm
 Soldering conditions: auto-soldering: max.: 270°C, 5sec.
 Mounting: on pc-board
 Material: Base: thermoplastic UL94V-0, blue
 Button: silicone, ivory
 Contact disc: stainless steel, 0.025µm gold plated over nickel barrier
 Terminal contact: brass, 0.025µm gold plated
 Terminal: brass, tin plated

CIRCUIT DIAGRAM



IP rating:

IP67



Tolerances: 0.1-1.0: ±0.05mm 1.0-5.0: ±0.1mm 5.0-10.0: ±0.2mm		Date	Name	TMP 1-R	
		09/08	dr		
Material	07/12	dr		30 15 92	
IP rating	04/12	dr			
Operating temperature	06/09	dr		Page	
Operating force	05/09	dr			
Modifications	Date	Name		1/1	

knitter-switch