


FPD13W51RT

InGaAs AVALANCHE PHOTODIODE

DESCRIPTION

The FPD13W51RT is a wide bandwidth and high sensitivity InGaAs avalanche photodiode (APD) mounted on a low parasitic ceramic carrier designed for use in optical transmission systems operating at a giga-bit-rate, especially at 2.4Gb/s., and a long distance. The APD chip has a photo-sensitive area diameter of 50 μ m. Fujitsu's advanced InGaAs/InP material technology realizes a high reliability planar structure device with wide bandwidth (large gain-bandwidth product) as well as low noise characteristics. The device is designated by the specified wavelength of 1300nm.



FEATURES

- Chip-on-carrier for low parasitics.
- Photosensitive diameter: 50 μ m
- High cut-off frequency: 3.0GHz at M=5 and 10
- Large gain-bandwidth product: 40GHz
- Low dark current: 20nA
- Low multiplied dark current: 3nA
- Low excess noise factor: 5 at M=10
- High reliability planar structure with a guard ring based on advanced InGaAs/InP material technology.

APPLICATIONS

- Multi giga-bit-rate optical transmission systems up to 2.5Gb/s.

ABSOLUTE MAXIMUM RATINGS (T_a = 25°C)

Parameter	Symbol	Ratings	Unit
Storage Temperature	T _{stg}	-40 to +70	°C
Operating Temperature	T _{op}	-40 to +70	°C
Forward Current	I _F	10	mA
Reverse Current	I _R	0.5	mA

OPTICAL AND ELECTRICAL CHARACTERISTICS (T_a = 25°C)

Parameter	Symbol	Test Conditions	Limits			Unit	
			Min.	Typ.	Max.		
Quantum Efficiency (Responsivity)	η (R)	$\lambda = 1300\text{nm}$ M = 1	75 (0.78)	80 (0.83)	—	% (A/W)	
Breakdown Voltage	V _B	I _D = 10 μ A	60	80	100	V	
Temperature Coefficient of V _B	γ		—	0.15	—	%/°C	
Dark Current	I _D	V _R = 0.9V _B	—	20	50	nA	
Multiplied Dark Current	I _{DM}	M = 1	—	3	10	nA	
Excess Noise Factor	F	$\lambda = 1300\text{nm}$, M = 10 f = 30MHz, B = 1MHz I _{po} = 2 μ A	—	5	6.3	—	
	X		—	0.7	0.8	—	
Cut-off Frequency	f _c	$\lambda = 1300\text{nm}$, R _L = 50 Ω , -3dB from 500 KHz	M=5	2.5	3.0	—	GHz
			M=10	2.5	3.0	—	
			M=20	1.5	2.0	—	
Capacitance	C _t	f = 1MHz, V _R = 0.9V _B	—	0.4	0.5	pF	
Max. Multiplication Factor	M _{max}	$\lambda = 1300\text{nm}$, I _{po} = 2 μ A	30	40	—	—	

FPD13W51RT

TYPICAL CHARACTERISTICS

Fig. 1 Spectral Response (η vs. λ)

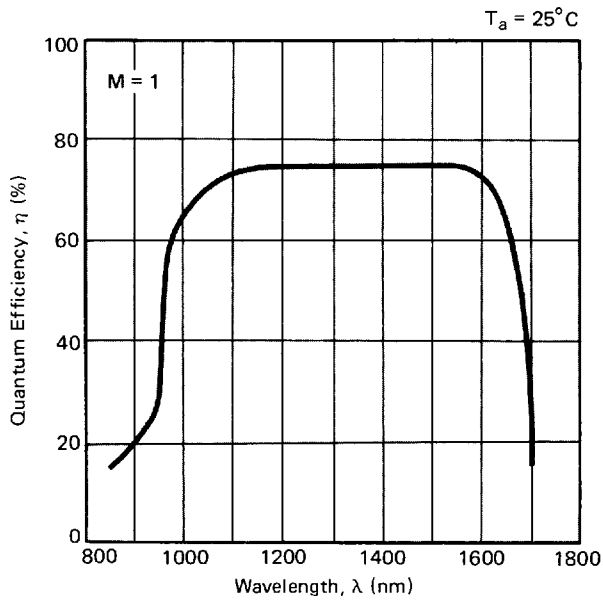


Fig. 2 Spectral Response (R vs. λ)

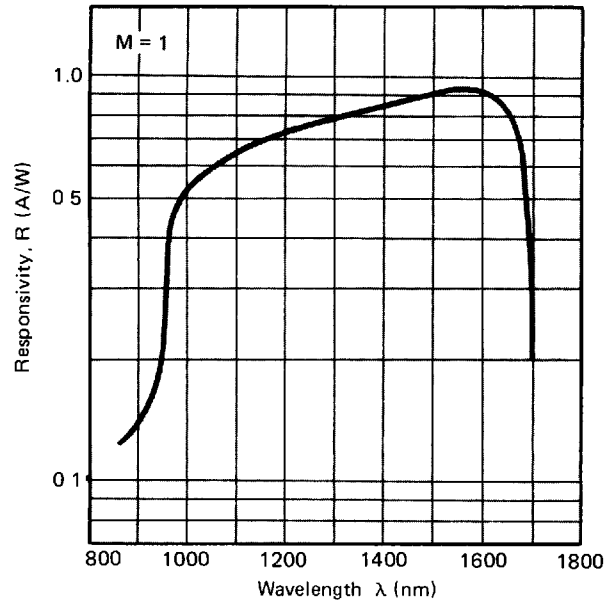


Fig. 3 Temperature Dependence of Responsivity


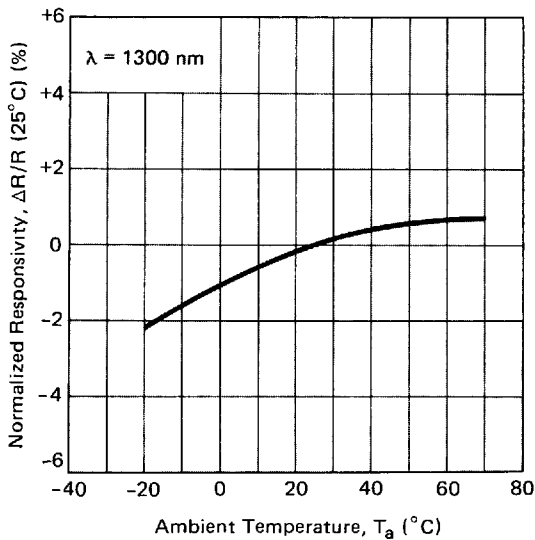


Fig. 4 Dark current vs. Reverse Voltage

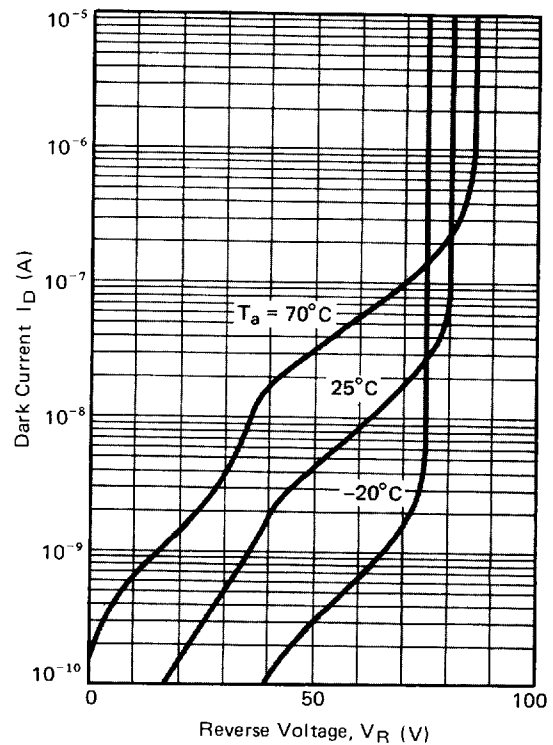

InGaAs AVALANCHE PHOTODIODE

Fig. 5 Temperature Dependence of Dark Current and Multiplied Dark Current

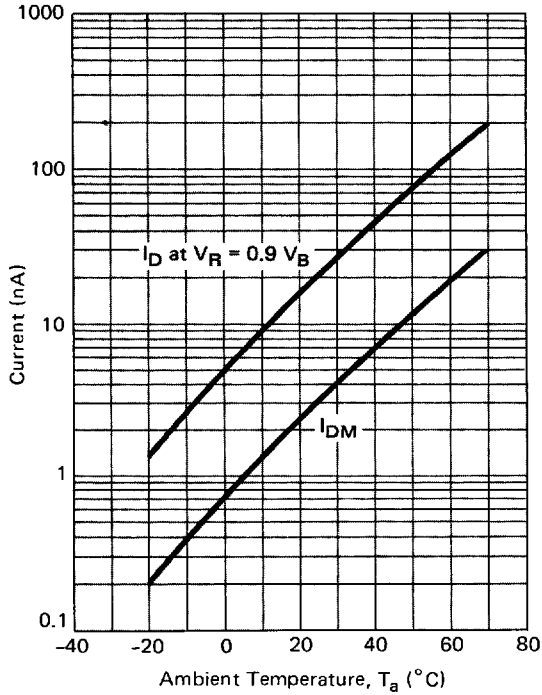


Fig. 6 Multiplication Characteristics

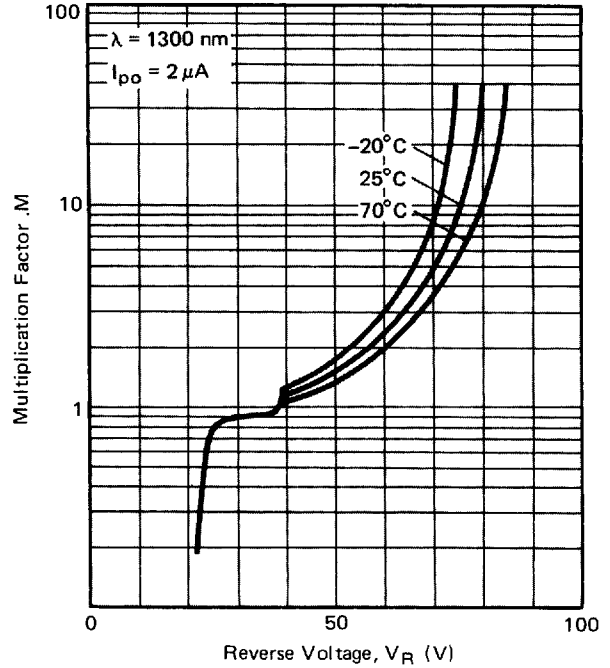


Fig. 7 Multiplication Factor vs. Photocurrent

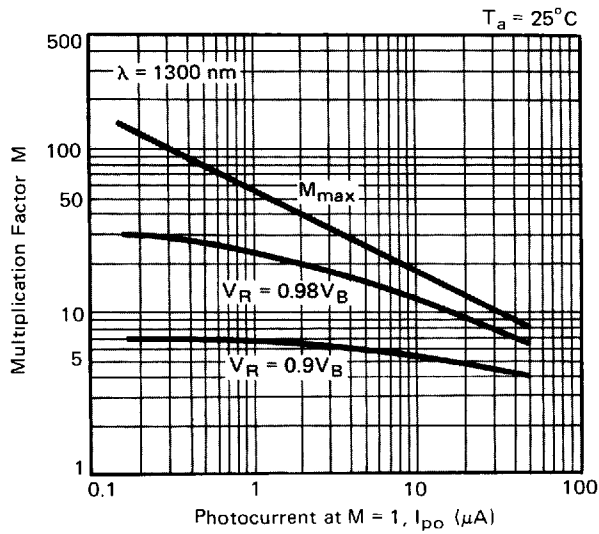


Fig. 8 Frequency Response

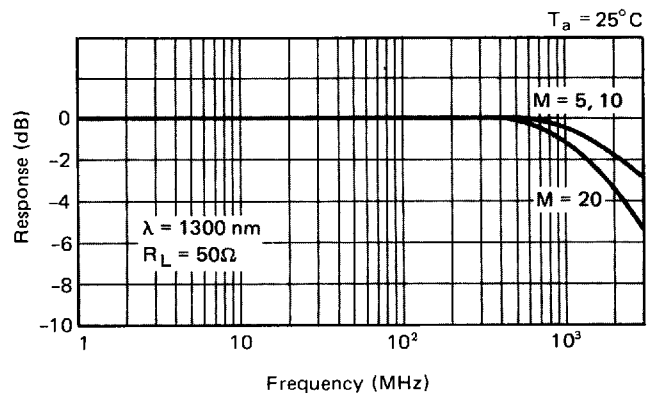


Fig. 9 Cutoff Frequency vs. Multiplication Factor

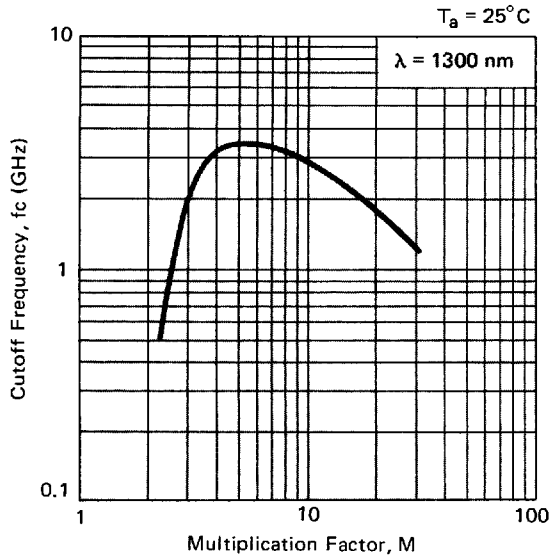


Fig. 10 Excess Noise Factor vs. Multiplication Factor

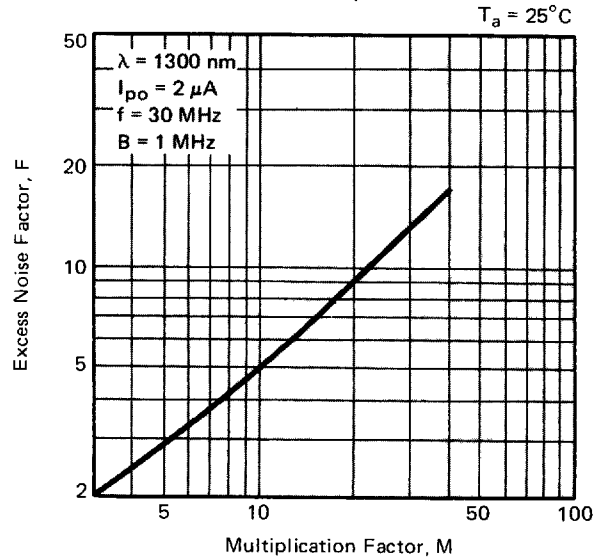


Fig. 11 Capacitance vs. Reverse Voltage

