



RoHS Compliant 515-1064-808F

Part Numbers with the "F" suffix ending are RoHS Compliant.
Example: 515-1302-0250F
Packaging is marked with "RoHS Compliant" label or equivalent markings.



REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A		NEW RELEASE	WFB			

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL SURFACES ON LIGHT PIPE MUST HAVE FINISH OF SPE-SPI #1 TO #2.
2. FLASH NOT TO EXCEED .005.
3. NO BUBBLES IN LIGHTPATH GREATER THAN .005.
4. GATE VESTIGE $+.015/- .010$ FROM SURFACE.
- 5 . DIALIGHT P/N: 515-1064-808F
6. PACKAGE IN ANTISTATIC BAG 25 PCS/BAG
7. FOR HIGH INSERTION FORCE PRESS FIT (30-50 LBS), USE MOUNTING HOLE SIZE $\varnothing .064 \pm .002$ ". THIS MAY REQUIRE USE OF PLASTIC INSERTION TOOL.

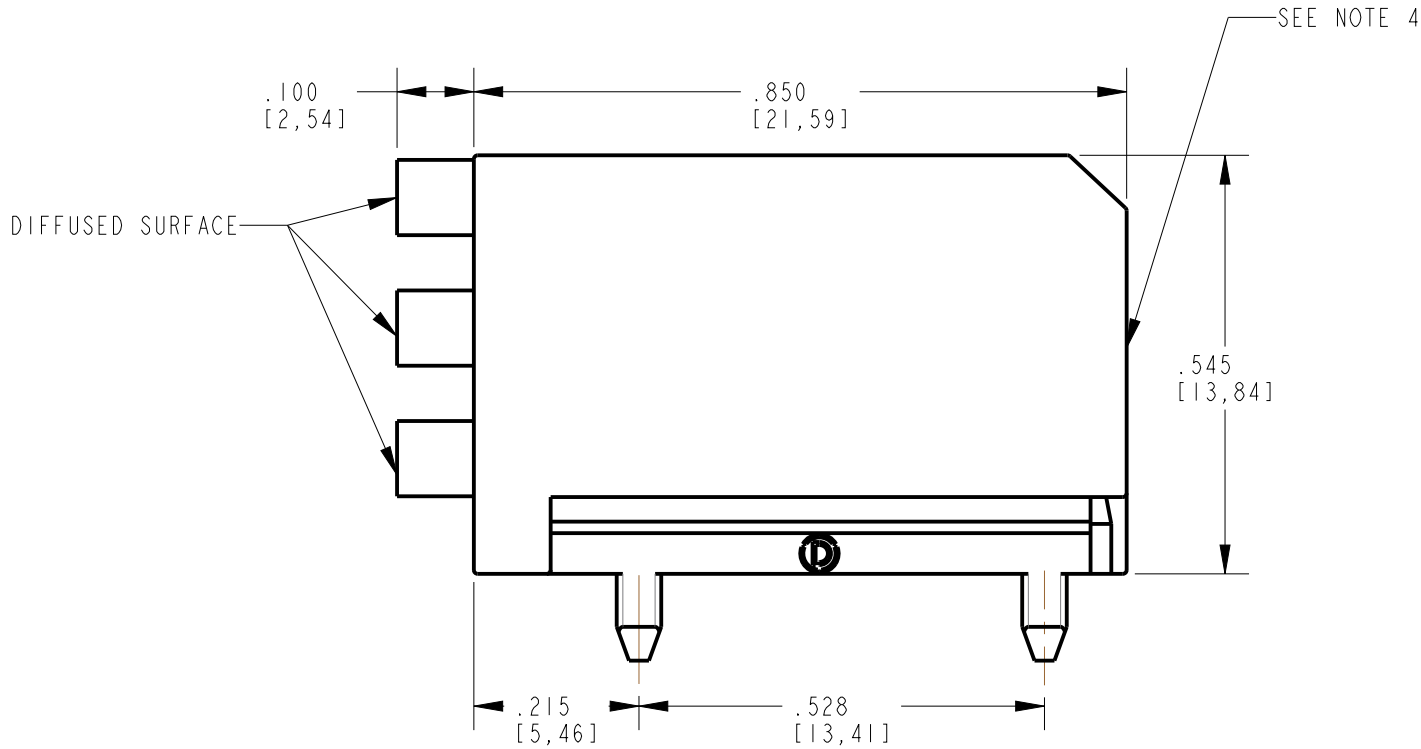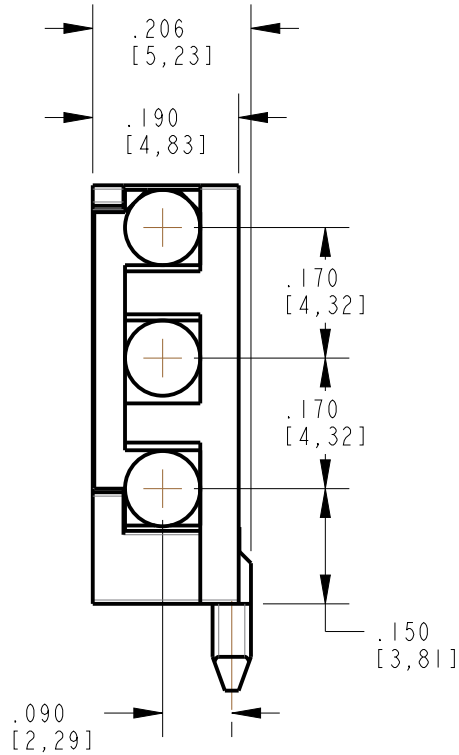

DIAGONAL $\varnothing .070 + .003 / - .001$
[1,78 +0,08/-0,03]

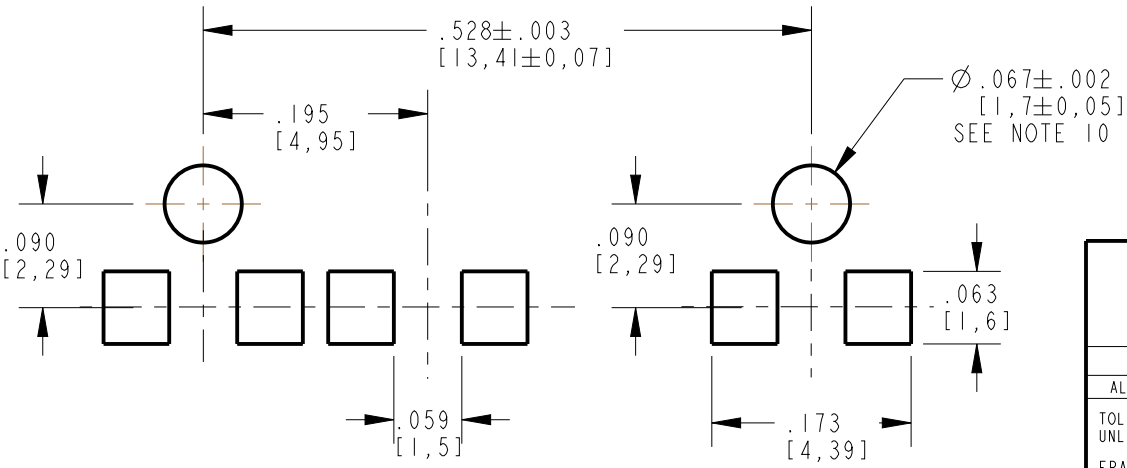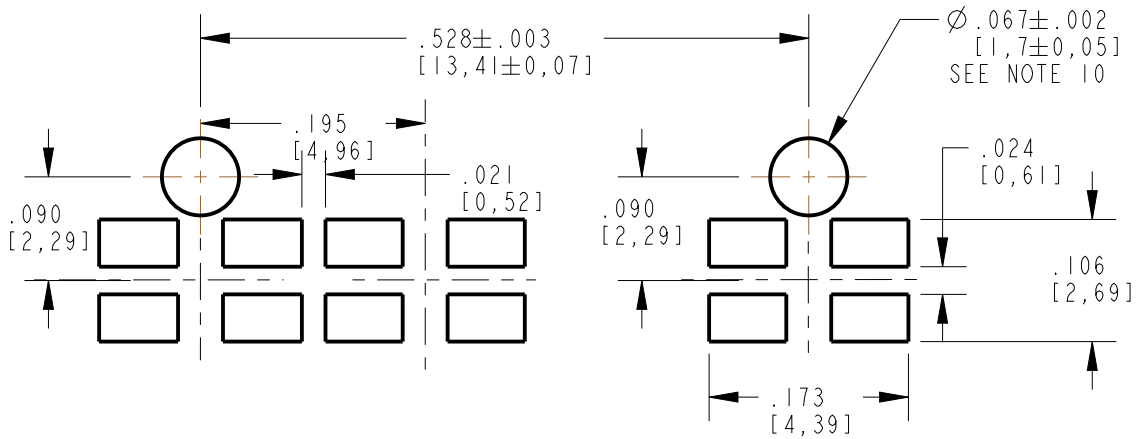

REFERENCE SOLDERPAD/HOLE LAYOUT FOR BI-COLOR LEDs
LED P/N 597-77XX-507F

REFERENCE SOLDERPAD/HOLE LAYOUT FOR SINGLE-COLOR LEDs
P/N 597-3XXI-507F

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.		
SCALE: 2.000	DRAWING NUMBER C-18095	REV A
ALL DIM'S IN: INCHES (MM)		
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE LIGHT PIPE WITH SHIELD ASSEMBLY (RoHS COMPLIANT)	
FRACTIONS: $\pm 1/64$ DECIMALS (.XX): $\pm .01$ DECIMALS (.XXX): $\pm .005$ DECIMALS (.XXXX): $\pm .0005$ ANGLES: $\pm 1^\circ$		
FINISH: -	MATERIAL	
FSCM 83330		1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727
	SHEET 1 OF 1	FAMILY TABLE: