

# AN1555N, AN1555NS


## General-use Precision Timers

### Overview


The AN1555N, and the AN1555NS are the integrated circuits designed for generating an accurate and stable timing pulse and timer time. They are widely applicable a monostable or unstable multivibrator, etc.

### Features

- Timing control microseconds to hours
- Max frequency in oscillation mode 100kHz
- High stability vs. ambient temperature and supply voltage
- TTL compatible output
- 200mA sink or source output current capability
- Reset voltage : 1.4V typ

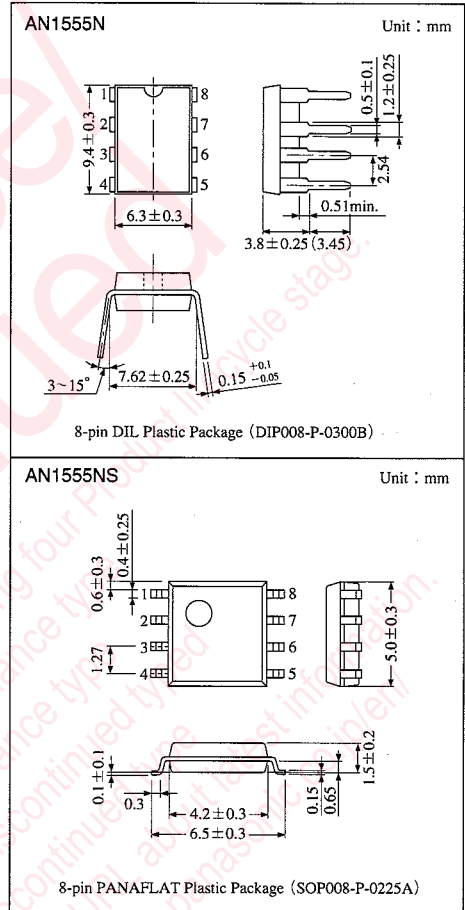

### Block Diagram

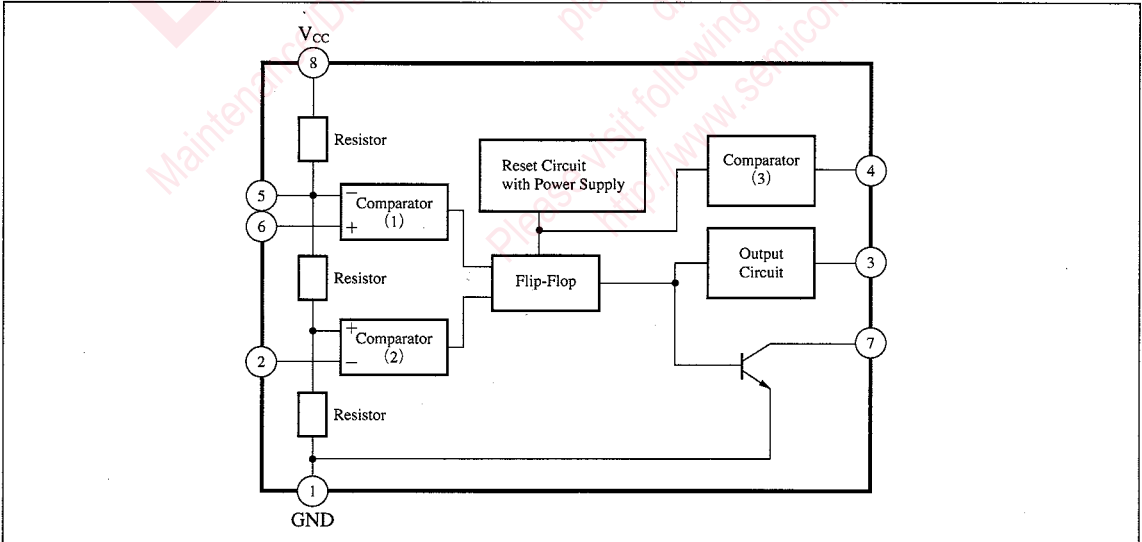

### Pin Descriptions

Pin No.	Pin name
1	GND
2	Trigger
3	Output
4	Reset
5	Control voltage
6	Threshold
7	Discharge
8	V <sub>CC</sub>

### Absolute Maximum Ratings (Ta=25°C)










Parameter	Symbol	Rating	Unit
Supply voltage	V <sub>CC</sub>	18	V
Power dissipation	AN1555N	625	mW
	AN1555NS	361	
Operating ambient temperature	T <sub>opr</sub>	-20 to +75	°C
Storage temperature	T <sub>stg</sub>	-55 to +125	°C

### Electrical Characteristics (Ta=25°C)


Parameter	Symbol	Condition	min	typ	max	Unit
Circuit current	I <sub>tot</sub>	V <sub>CC</sub> =5V, R <sub>L</sub> =∞, Output : L	—	5	7	mA
		V <sub>CC</sub> =15V, R <sub>L</sub> =∞, Output : L	—	8	12	mA
Threshold voltage	V <sub>t</sub>	V <sub>CC</sub> =5 to 15V	—	$\frac{2}{3} V_{CC}$	—	V
Threshold current	I <sub>t</sub>	V <sub>CC</sub> =5 to 15V	—	0.03	0.3	μA
Trigger voltage	V <sub>(Trigger)</sub>	V <sub>CC</sub> =5 to 15V	—	$\frac{1}{3} V_{CC}$	—	V
Trigger current	I <sub>(Trigger)</sub>	V <sub>CC</sub> =5 to 15V	—	0.1	0.5	μA
Reset voltage	V <sub>(Reset)</sub>	V <sub>CC</sub> =5 to 15V	—	1.4	2.0	V
Reset current	I <sub>(Reset)</sub>	V <sub>CC</sub> =5 to 15V	—	0.05	0.2	μA
Control voltage	V <sub>(Cont.)</sub>	V <sub>CC</sub> =5V	2.6	3.33	4.0	V
		V <sub>CC</sub> =15V	9.0	10.0	11.0	V
Output voltage "L" level	V <sub>OL</sub>	V <sub>CC</sub> =5V, I <sub>SINK</sub> : 5mA	—	0.05	0.2	V
		V <sub>CC</sub> =5V, I <sub>SINK</sub> : 8mA	—	0.08	0.25	V
		V <sub>CC</sub> =15V, I <sub>SINK</sub> : 10mA	—	0.05	0.2	V
		V <sub>CC</sub> =15V, I <sub>SINK</sub> : 50mA	—	0.2	0.5	V
		V <sub>CC</sub> =15V, I <sub>SINK</sub> : 100mA	—	0.5	2	V
Output voltage "H" level	V <sub>OH</sub>	V <sub>CC</sub> =5V, I <sub>SOURCE</sub> : 100mA	2.8	3.3	—	V
		V <sub>CC</sub> =15V, I <sub>SOURCE</sub> : 100mA	12.8	13.3	—	V
Initial time interval error	Δt <sub>E</sub>	Unstable oscillation	—	1.0	—	%
Time interval temperature regulation	Δt <sub>T</sub>	R <sub>A</sub> , R <sub>B</sub> =1 to 100kΩ	—	50	—	ppm/°C
Time interval supply voltage regulation	Δt <sub>V</sub>	C=0.1 μF	—	0.1	—	%/V
Rise time	t <sub>r</sub>	V <sub>CC</sub> =5 to 15V	—	100	—	ns
Fall time	t <sub>f</sub>		—	100	—	ns

Note) Operating Supply Voltage Range : V<sub>CC(opr)</sub> = 4.5 to 16V


**Characteristics Curve**

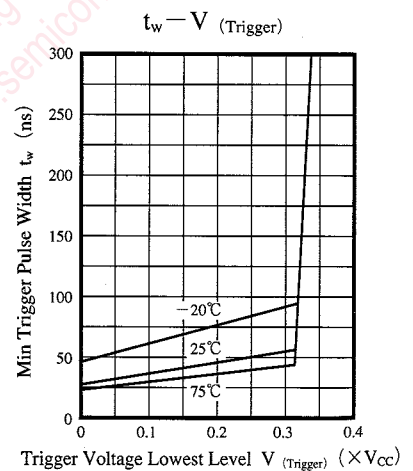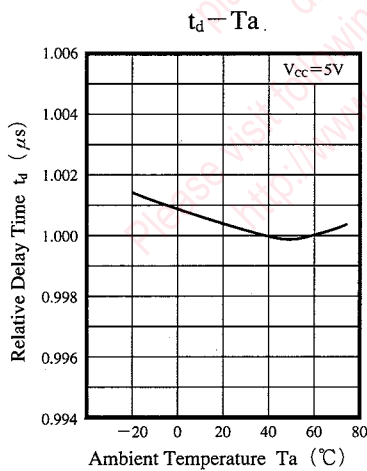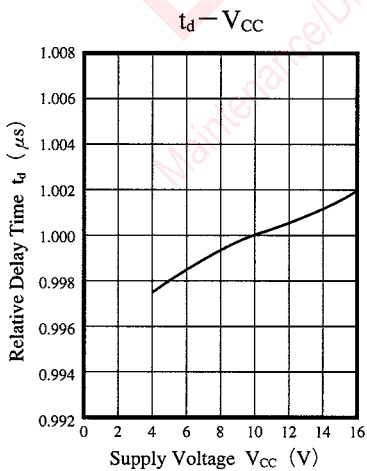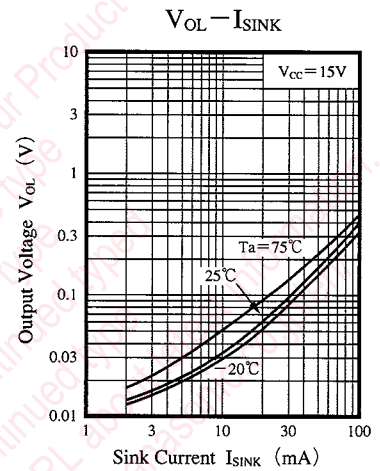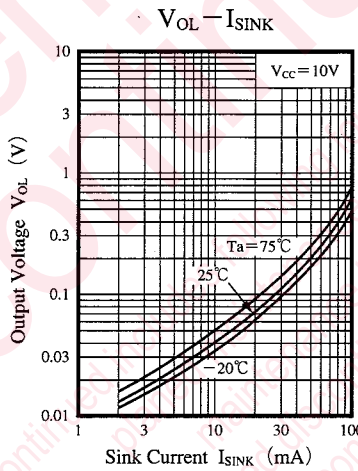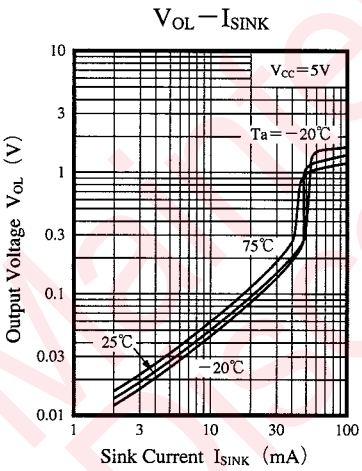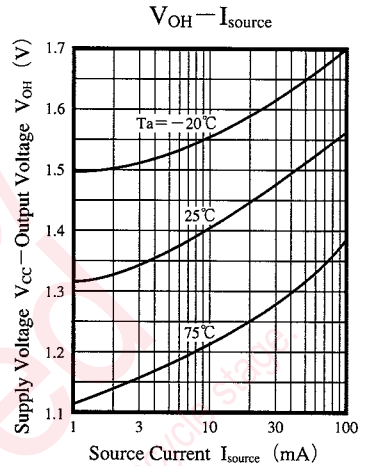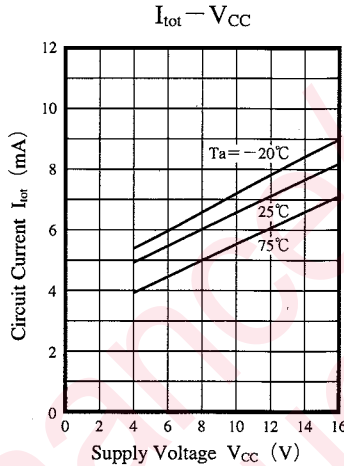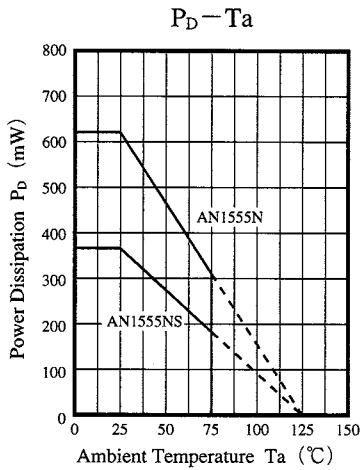

Others

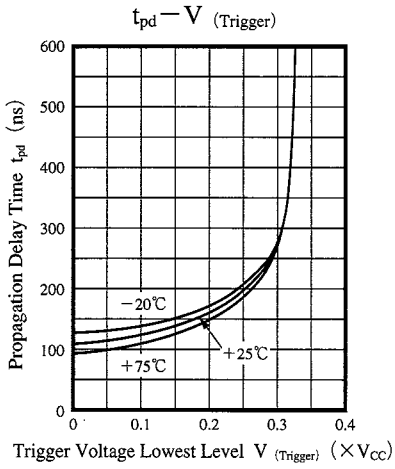

■ Application Circuit

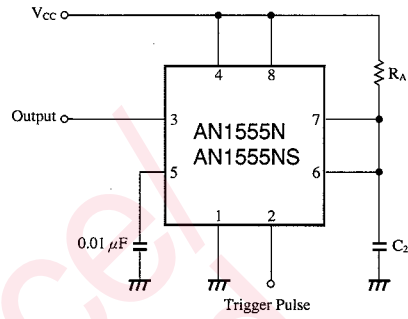

- Parts and measuring apparatus
- R<sub>A</sub> : Metal film resistor
- C<sub>2</sub> : Polyester capacitor
- Output : Universal counter load 1k Ω

Maintenance/Discontinued includes following four Product lifecycle stage.  
 planned maintenance type  
 maintenance type  
 planned discontinued type  
 discontinued type  
 Please visit following URL about latest information.  
<http://www.semicon.panasonic.co.jp/en/>

## Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
  - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.