REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE



RECOMMENDED
CABLE STRIPPING DIM'S

CABLES: – 0.61
– 3.8
– 5.3
– 6.7

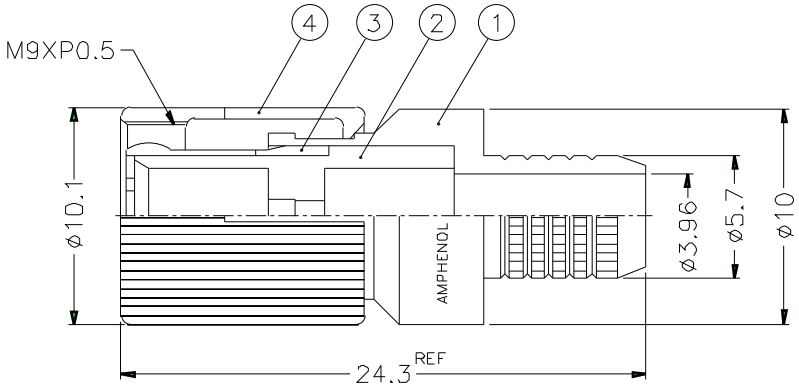

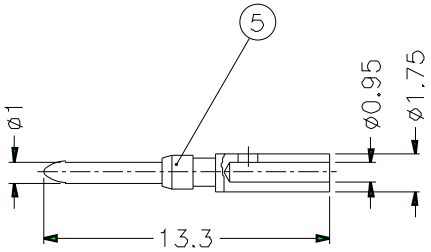

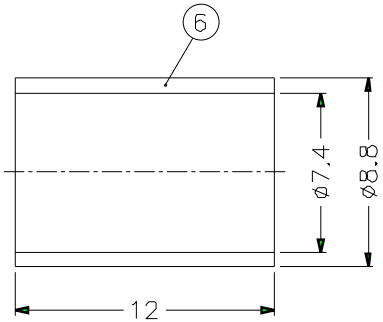

– FERRULE CRIMPING TOOL P/N
SX 660 0058 HEX: 7.5 L=10.16
– INNER CONTACT CRIMPING TOOL P/N
413 SP 00 ADJUST TO 6
– CONNECTOR ACCORDING TO NFC 93–570, CEI 169–13
– PACKAGING IN BAG WITH COMMERCIAL PART NUMBER AND DATE CODE

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
6	FERRULE	COPPER	NICKEL	1	
5	CONTACT PIN	BRASS	GOLD	1	
4	SHELL	BRASS	NICKEL	1	
3	OUT CONTACT	BRONZE	GOLD	1	
2	INSULATOR	TEFLON	NATURAL	1	
1	BODY	BRASS	NICKEL	1	

DIMENSIONS ARE IN MILLIMETERS

SCALE 3/1 ISSUE A

PART NO. 156 929 78

APPROVED DATE 10-11-01'

CHECKED DATE 10-11-01'

DRAWN DATE 10-11-01'

FILE NO.

Amphenol

TITLE
1.6/5.6 75Ω STRAIGHT PLUG, CRIMP TYPE

DRAWING NO.

ITEM NO.