

74F381 4-Bit Arithmetic Logic Unit

General Description

The 'F381 performs three arithmetic and three logic operations on two 4-bit words, A and B. Two additional select input codes force the function outputs LOW or HIGH. Carry propagate and generate outputs are provided for use with the 'F182 carry lookahead generator for high-speed expansion to longer word lengths. For ripple expansion, refer to the 'F382 ALU data sheet.

Features


- Low input loading minimizes drive requirements
- Performs six arithmetic and logic functions
- Selectable LOW (clear) and HIGH (preset) functions
- Carry generate and propagate outputs for use with carry lookahead generator

Ordering Code: See Section 11


Commercial	Package Number	Package Description
74F381PC	N20A	20-Lead (0.300" Wide) Molded Dual-In-Line
74F381SC (Note 1)	M20B	20-Lead (0.300" Wide) Molded Small Outline, JEDEC
74F381SJ (Note 1)	M20D	20-Lead (0.300" Wide) Molded Small Outline, EIAJ

Note 1: Devices also available in 13" reel. Use suffix = SCX and SJX.

Logic Symbols

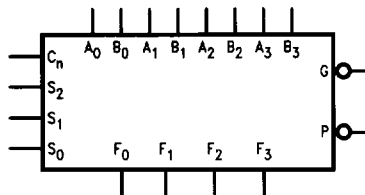


TL/F/9528-3

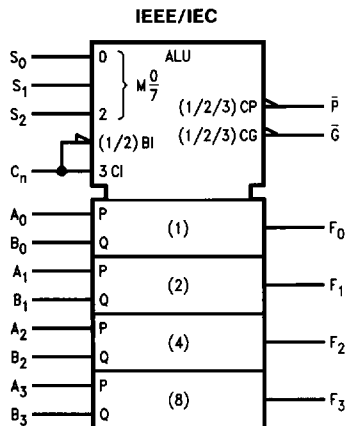

TL/F/9528-6

Connection Diagram

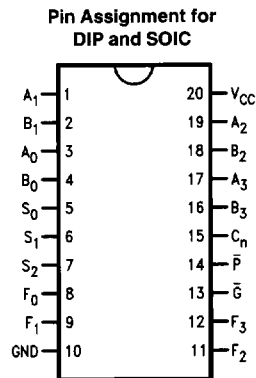

TL/F/9528-1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	74F	
		U.L. HIGH/LOW	Input I _H /I _L Output I _{OH} /I _{OL}
A ₀ -A ₃	A Operand Inputs	1.0/3.0	20 μA/ -1.8 mA
B ₀ -B ₃	B Operand Inputs	1.0/3.0	20 μA/ -1.8 mA
S ₀ -S ₂	Function Select Inputs	1.0/1.0	20 μA/ -0.6 mA
C _n	Carry Input	1.0/4.0	20 μA/ -2.4 mA
\bar{G}	Carry Generate Output (Active LOW)	50/33.3	-1 mA/20 mA
\bar{P}	Carry Propagate Output (Active LOW)	50/33.3	-1 mA/20 mA
F ₀ -F ₃	Function Outputs	50/33.3	-1 mA/20 mA

Functional Description

Signals applied to the Select inputs S₀-S₂ determine the mode of operation, as indicated in the Function Select Table. An extensive listing of input and output levels is shown in the Truth Table. The circuit performs the arithmetic functions for either active HIGH or active LOW operands, with output levels in the same convention. In the Subtract operating modes, it is necessary to force a carry (HIGH for active

HIGH operands, LOW for active LOW operands) into the C_n input of the least significant package.

The Carry Generate (\bar{G}) and Carry Propagate (\bar{P}) outputs supply input signals to the 'F182 carry lookahead generator for expansion to longer word length, as shown in Figure 1. Note that an 'F382 ALU is used for the most significant package. Typical delays for Figure 1 are given in Figure 2.

Function Select Table

Select			Operation
S ₀	S ₁	S ₂	
L	L	L	Clear
H	L	L	B Minus A
L	H	L	A Minus B
H	H	L	A Plus B
L	L	H	A ⊕ B
H	L	H	A + B
L	H	H	AB
H	H	H	Preset

H = HIGH Voltage Level
L = LOW Voltage Level

FIGURE 2. 16-Bit Delay Tabulation

Path Segment	Toward F	Output C _n + 4, OVR
A _i or B _i to \bar{P}	7.2 ns	7.2 ns
\bar{P}_i to C _n + ('F182)	6.2 ns	6.2 ns
C _n to F	8.1 ns	—
C _n or C _n + 4, OVR	—	8.0 ns
Total Delay	21.5 ns	21.4 ns


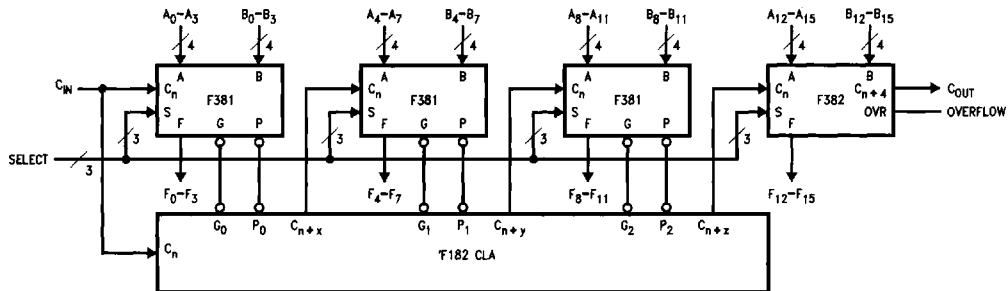


FIGURE 1. 16-Bit Lookahead Carry ALU Expansion

TL/F/9528-4

Logic Diagram

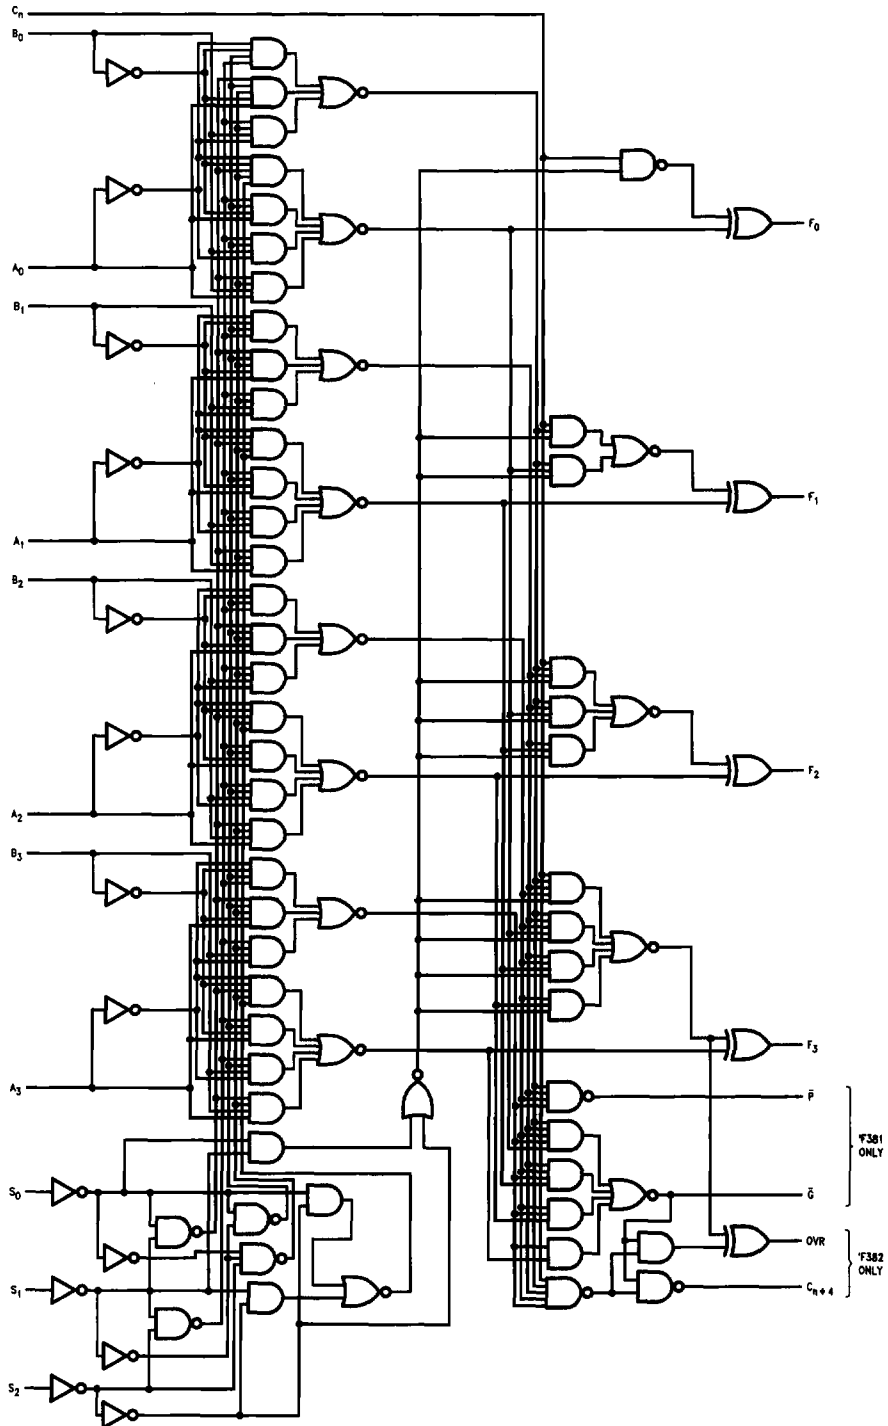

TL/F/9528-5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Truth Table

Function	Inputs						Outputs						
	S ₀	S ₁	S ₂	C _n	A _n	B _n	F ₀	F ₁	F ₂	F ₃	\bar{G}	\bar{P}	
CLEAR	L	L	L	X	X	X	L	L	L	L	L	L	
B Minus A	H	L	L	L	L	L	H	H	H	H	H	L	
				L	L	H	L	H	H	H	L	L	
				L	H	L	L	L	L	L	L	H	H
				L	H	H	L	L	L	L	L	H	L
				H	L	L	L	L	L	L	L	H	L
				H	L	H	L	L	L	L	L	H	L
				H	H	L	L	L	L	L	L	H	H
A Minus B	L	H	L	L	L	L	H	H	H	H	H	L	
				L	L	H	L	L	L	L	L	H	H
				L	H	L	L	L	L	L	L	L	L
				L	H	H	L	L	L	L	L	H	L
				H	L	L	L	L	L	L	L	H	L
				H	L	H	L	L	L	L	L	H	H
				H	H	L	L	L	L	L	L	L	L
A Plus B	H	H	L	L	L	L	L	L	L	L	H	H	
				L	L	H	L	H	H	H	H	L	
				L	H	L	L	H	H	H	H	H	L
				L	H	H	L	L	H	H	H	L	L
				H	L	L	L	L	L	L	L	H	H
				H	L	H	L	L	L	L	L	H	L
				H	H	H	L	L	L	L	L	L	L
A ⊕ B	L	L	H	X	L	L	L	L	L	L	H	H	
				X	L	H	L	H	H	H	H	H	
				X	H	L	L	H	H	H	H	L	
				X	H	H	L	L	L	L	L	L	
A + B	H	L	H	X	L	L	L	L	L	L	H	H	
				X	L	H	L	H	H	H	H	H	
				X	H	L	L	H	H	H	H	H	
				X	H	H	L	H	H	H	H	H	
AB	L	H	H	X	L	L	L	L	L	L	L	L	
				X	L	H	L	L	L	L	L	H	H
				X	H	L	L	L	L	L	L	L	L
				X	H	H	L	H	H	H	H	H	L
PRESET	H	H	H	X	L	L	L	H	H	H	H	H	
				X	L	H	L	H	H	H	H	H	
				X	H	L	L	H	H	H	H	H	
				X	H	H	L	H	H	H	H	H	

H = HIGH Voltage Level
 L = LOW Voltage Level
 X = Immaterial

Absolute Maximum Ratings (Note 1)

Storage Temperature	-65°C to +150°C
Ambient Temperature under Bias	-55°C to +125°C
Junction Temperature under Bias	-55°C to +175°C
Plastic	-55°C to +150°C
V _{CC} Pin Potential to Ground Pin	-0.5V to +7.0V
Input Voltage (Note 2)	-0.5V to +7.0V
Input Current (Note 2)	-30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V _{CC} = 0V)	
Standard Output	-0.5V to V _{CC}
TRI-STATE® Output	-0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I _{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	0°C to +70°C
Commercial	
Supply Voltage	+4.5V to +5.5V
Commercial	

DC Electrical Characteristics

Symbol	Parameter		74F			Units	V _{CC}	Conditions
			Min	Typ	Max			
V _{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V _{IL}	Input LOW Voltage		0.8			V		Recognized as a LOW Signal
V _{CD}	Input Clamp Diode Voltage		-1.2			V	Min	I _{IN} = -18 mA
V _{OH}	Output HIGH Voltage	74F 10% V _{CC} 74F 5% V _{CC}	2.5 2.7			V	Min	I _{OH} = -1 mA I _{OH} = -1 mA
V _{OL}	Output LOW Voltage	74F 10% V _{CC}	0.5			V	Min	I _{OL} = 20 mA
I _{IH}	Input HIGH Current	74F	5.0			μA		V _{IN} = 2.7V
I _{BVI}	Input HIGH Current Breakdown Test	74F	7.0			μA	Max	V _{IN} = 7.0V
I _{CEX}	Output HIGH Leakage Current	74F	50			μA	Max	V _{OUT} = V _{CC}
V _{ID}	Input Leakage Test	74F	4.75			V	0.0	I _{ID} = 1.9 μA All Other Pins Grounded
I _{OD}	Output Leakage Circuit Current	74F	3.75			μA	0.0	V _{IOD} = 150 mV All Other Pins Grounded
I _{IL}	Input LOW Current		-0.6 -1.8 -2.4			mA	Max Max Max	V _{IN} = 0.5V (S _n) V _{IN} = 0.5V (A _n , B _n) V _{IN} = 0.5V (C _n)
I _{OS}	Output Short-Circuit Current		-60 -150			mA	Max	V _{OUT} = 0V
I _{CC}	Power Supply Current		59 89			mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F			74F		Units	Fig. No.
		$T_A = +25^\circ\text{C}$ $V_{CC} = +5.0\text{V}$ $C_L = 50\text{ pF}$			$T_A, V_{CC} = \text{Com}$ $C_L = 50\text{ pF}$			
		Min	Typ	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay C_n to F_i	2.5 2.5	8.1 5.7	12.0 8.0	2.5 2.5	13.0 9.0	ns	2-3
t_{PLH} t_{PHL}	Propagation Delay Any A or B to Any F	4.0 3.5	10.4 8.2	15.0 11.0	4.0 3.5	16.0 12.0	ns	2-3
t_{PLH} t_{PHL}	Propagation Delay S_i to F_i	4.5 4.0	8.3 8.2	20.5 15.0	4.5 4.0	21.5 16.0	ns	2-3
t_{PLH} t_{PHL}	Propagation Delay A_i or B_i to \bar{G}	3.5 3.5	6.4 6.8	10.0 10.0	3.5 3.0	11.0 11.0	ns	2-3
t_{PLH} t_{PHL}	Propagation Delay A_i or B_i to \bar{P}	2.5 3.5	7.2 6.5	10.5 9.5	2.5 3.5	11.5 10.5	ns	2-3
t_{PLH} t_{PHL}	Propagation Delay S_i to \bar{G} or \bar{P}	4.0 4.5	7.8 10.2	12.0 13.5	4.0 4.5	13.0 14.5	ns	2-3