




Surface Mount LC Filters

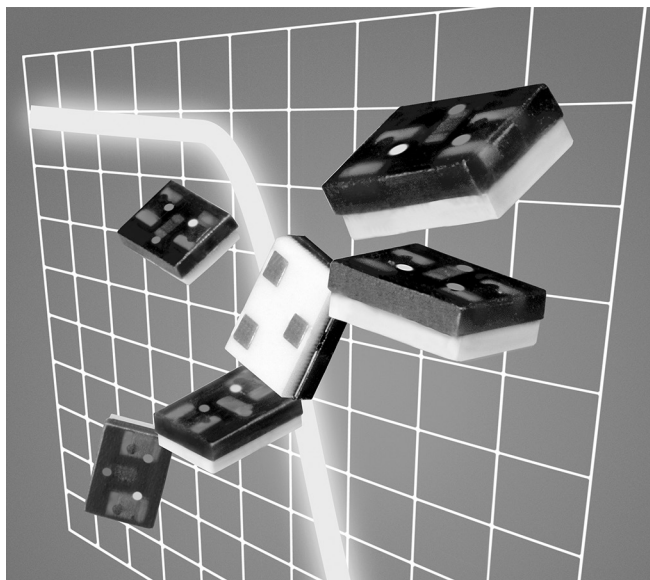

These space saving low and high pass filters are pre-tuned, tight tolerance modules that serve a wide variety of filtering requirements.

- 3rd order Butterworth alignment
- 50 Ohm characteristic impedance; less than 0.3 dB insertion loss

Designer's Kit C362 contains 3 of each value

Terminations RoHS compliant silver over copper or gold over nickel over silver

Weight 64.7 – 69.0 mg

Ambient temperature –40°C to +85°C

Storage temperature Component: –40°C to +85°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

12 per billion hours / 83,333,333 hours, calculated per Telcordia SR-332

Packaging 600/7" reel; 2200/13" reel Paper tape: 12 mm wide, 0.3 mm thick, 8 mm pocket spacing, 2.3 mm pocket depth

PCB washing Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf.

Low Pass Filters

Part number ¹	-3 dB Cutoff	Irms (mA) ²
S3LP156L_	15 MHz	200
S3LP306L_	30 MHz	300
S3LP606L_	60 MHz	300
S3LP157L_	150 MHz	400
S3LP307L_	300 MHz	400
S3LP507L_	500 MHz	500
S3LP707L_	700 MHz	500
S3LP807L_	800 MHz	500
S3LP907L_	900 MHz	500
S3LP108L_	1.0 GHz	500
S3LP128L_	1.2 GHz	500
S3LP158L_	1.5 GHz	500
S3LP188L_	1.8 GHz	500
S3LP218L_	2.1 GHz	500

1. When ordering, please specify **termination** and **packaging** codes:

S3HP156LC

Termination: L = RoHS compliant silver over copper or gold over nickel over silver.
Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape (600 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape (2200 parts per full reel).

2. Current that causes a 15°C rise from 25°C ambient.


3. Operating temperature range -40°C to +85°C.

4. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering

High Pass Filters

Part number ¹	-3 dB Cutoff	Irms (mA) ²
S3HP156L_	15 MHz	300
S3HP306L_	30 MHz	300
S3HP606L_	60 MHz	300
S3HP157L_	150 MHz	300
S3HP307L_	300 MHz	300
S3HP507L_	500 MHz	500
S3HP807L_	800 MHz	500

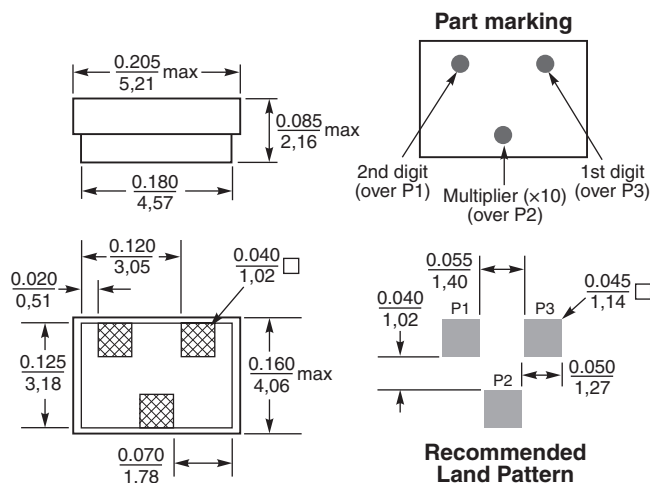


Visit <http://www.coilcraft.com/colrcode.cfm> for color coding explanation.







Surface Mount LC Filters



S-Parameter files
ON OUR WEB SITE

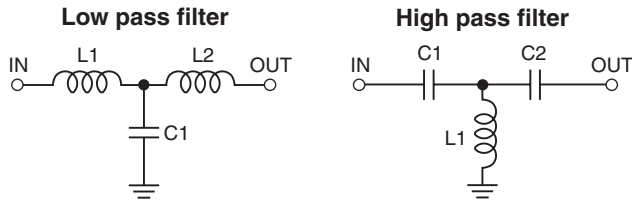

Frequency Response—Low Pass Filters*

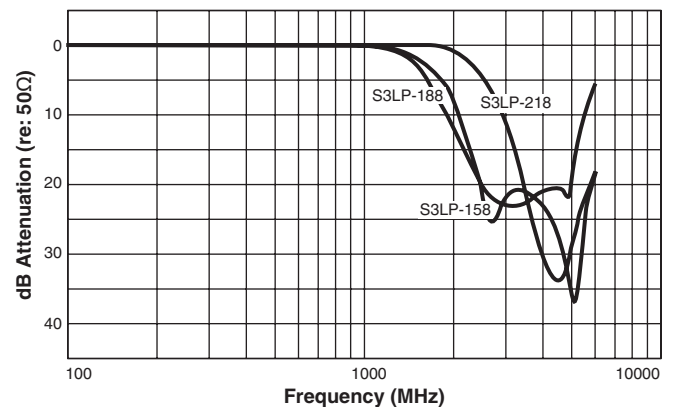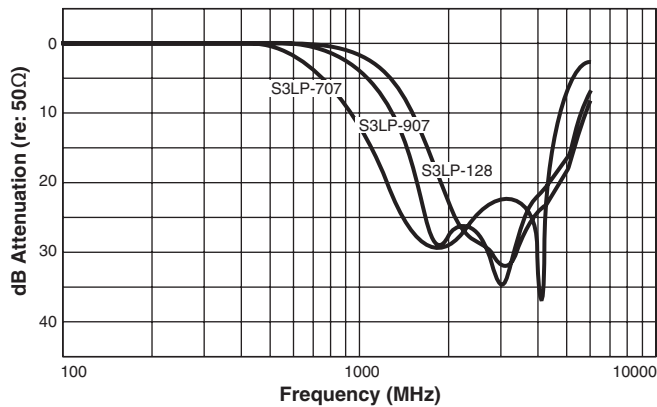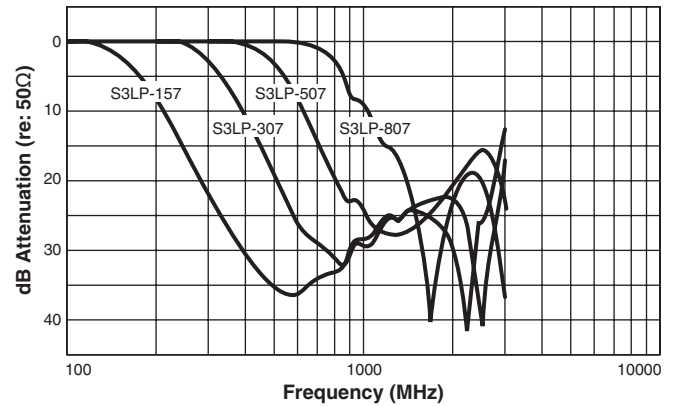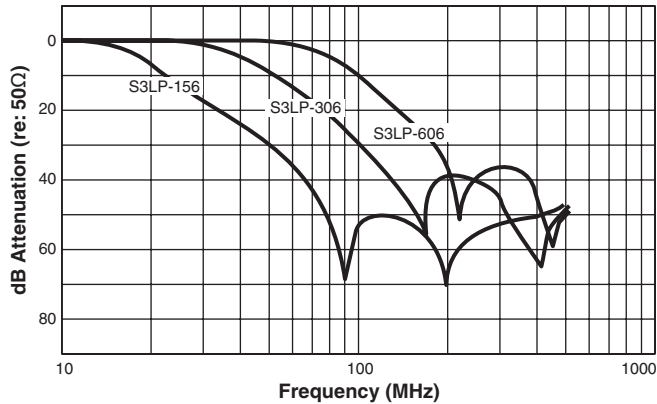

Frequency Response—High Pass Filters*

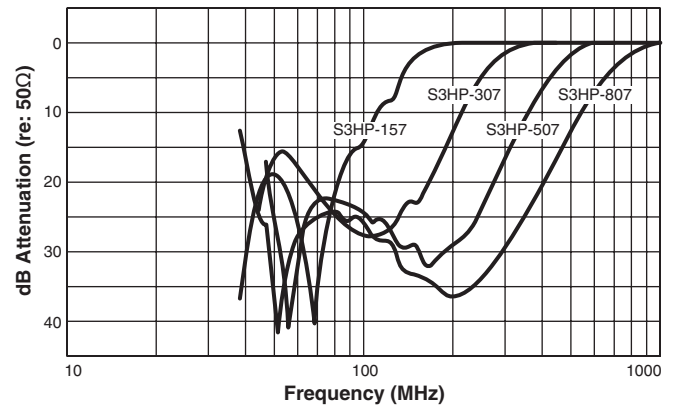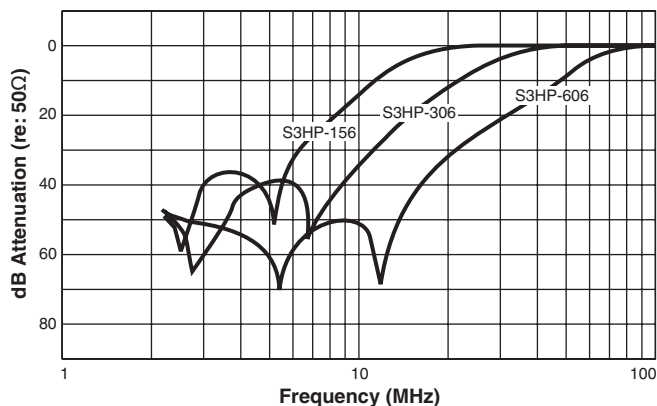

*Measured on Agilent/HP 8753D network analyzer



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 124-2 Revised 01/24/12

© Coilcraft Inc. 2013

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.