



Omnidirectional antennas are the right choice for situations where you need to be in contact with sources that are in two directions or if you do not know what direction the signals are coming from.

Standard data transmission omnis are fully decoupled antennas built on a copper laminate and housed in 0.100-inch wall fiberglass housings. They may be mounted right side up or tipped upside down depending upon the desired pattern. They also feature a very versatile clamp mounting system that fits most every situation you may encounter.

FEATURES AND BENEFITS

- Fiberglass enclosures
- Plated copper laminated radiator
- Weatherproof designs with UltraLink pigtail
- Broadband performance
- DC grounded
- Omnidirectional
- RoHS-compliant


APPLICATIONS

- M2M/IoT
- Two-way dispatch
- LoRa

MODEL	FREQUENCY (MHz)	VSWR (Nominal)	GAIN (dBi)	BANDWIDTH (1.5:1 MHz)	-3 DB BEAMWIDTH E-PLANE	TYPE (Female)	HEIGHT cm (in.)	WEIGHT kg (lb.)	W/SUR AREA m ² (ft ²)	W/SURVIVAL kph (mph)	PIGTAIL cm (in.)
S8964B	896-960	1.5:1	6	64	25°	N	107 (42 1/8)	0.70 (1.56)	0.02 (0.22)	200 (125)	23
S8963B	896-960	1.5:1	5	64	45°	N	78 (30 3/4)	0.53 (1.19)	0.016 (0.176)	200 (125)	23
S8960B	896-960	1.5:1	2	64	75°	N	44.5 (17 1/2)	0.25 (0.56)	0.009 (0.083)	200 (125)	17
S8804B	880-960	1.5:1	6	62	25°	N	107 (42 1/8)	0.70 (1.56)	0.02 (0.22)	200 (125)	23
S8803B	880-960	1.5:1	5	62	45°	N	78 (30 3/4)	0.53 (1.19)	0.016 (0.176)	200 (125)	23
S8800B	880-960	1.5:1	2	62	75°	N	44.5 (17 1/2)	0.25 (0.56)	0.009 (0.083)	200 (125)	17
S8244B	824-896	1.5:1	6	62	25°	N	107 (42 1/8)	0.70 (1.56)	0.02 (0.22)	200 (125)	23
S8243B	824-896	1.5:1	5	62	45°	N	78 (30 3/4)	0.53 (1.19)	0.016 (0.176)	200 (125)	23
S8240B	824-896	1.5:1	2	62	75°	N	44.5 (17 1/2)	0.25 (0.56)	0.009 (0.083)	200 (125)	17
S8064B	806-868	1.5:1	6	62	25°	N	107 (42 1/8)	0.70 (1.56)	0.02 (0.22)	200 (125)	23
S8063B	806-868	1.5:1	5	62	45°	N	78 (30 3/4)	0.53 (1.19)	0.016 (0.176)	200 (125)	23
S8060B	806-868	1.5:1	2	62	75°	N	44.5 (17 1/2)	0.25 (0.56)	0.009 (0.083)	200 (125)	17

COMMON SPECIFICATIONS	
Power Handling (Watts)	5
Element Material	Plated copper laminate
Enclosure Material	Fiberglass
Mounting Style	Tube end
Maximum Mast Diameter – cm (in.)	5.1 (2.0)

RADIATION PATTERNS

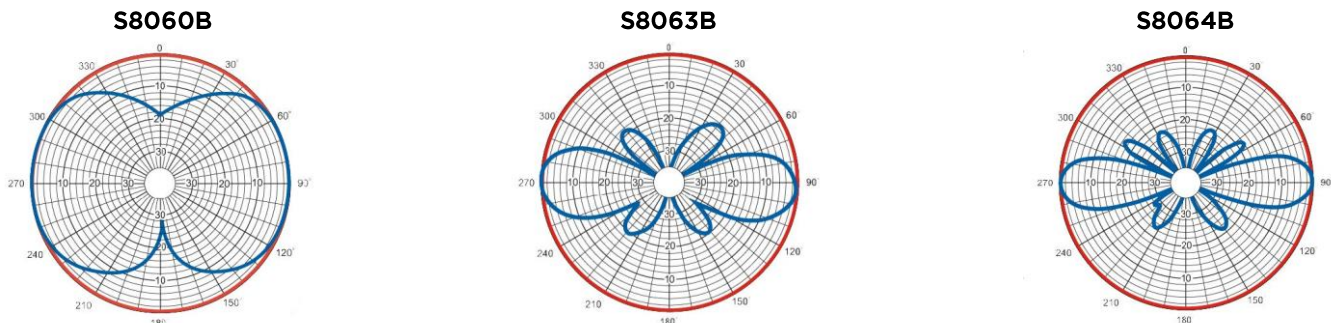

Americas: +1.847.839.6925
IAS-AmericasSales@lairdtech.com
Europe: +44.1628.858941
IAS-EUSales@lairdtech.com
Asia: IAS-AsiaSales@lairdtech.com
Middle East and Africa: +44.1628.858941
IAS-MEASales@lairdtech.com
<https://connectivity.lairdtech.com>

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2019 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

