



# NATIONAL HYBRID, INC.

2200 Smithtown Avenue, Ronkonkoma, NY 11779  
(631) 981-2400 Sales FAX 631-981-8888

## Mil-Std-1553/1760 Products NHI-15467/15468 Series +5V Monolithic Dual Transceivers

### Features:

- **Smallest Available, Fully Compliant, Mil-Std-1553A & B, Mil-Std-1760 Dual Transceivers !!**
- **Single +5V Supply !!**
- **1.5 Watts Maximum Power Dissipation @ 100% Duty Cycle !!**
- **Output Driver Withstands Short Circuit Fault**
- **Proprietary Monolithic Design Provides Superior Reliability, with outstanding Thermal Impedance Characteristics !!**
- **Superior Noise Performance Characteristics**

### Description:

The NHI-15467/15468 series of Mil-Std-1553/1760 monolithic dual transceivers are available in 1.00" x .300" ceramic dual in-line and flatpack packages.

Each receiver converts the 1553 bus bi-phase data to complementary RX and RX\_L TTL digital outputs for use by the manchester decoder. The device provides independent receiver enables for each channel.

The transmitters will output bi-phase manchester to the coupling transformer when the TX and TX\_L inputs are driven by complementary TTL digital data. The device provides an independent transmitter inhibit TXINH for each channel.

To reduce the pin count and package size, the transmitter outputs are connected to the receiver inputs internal to the device for each channel. This results in only two connections BUS & BUS\_L to the coupling transformer per channel.

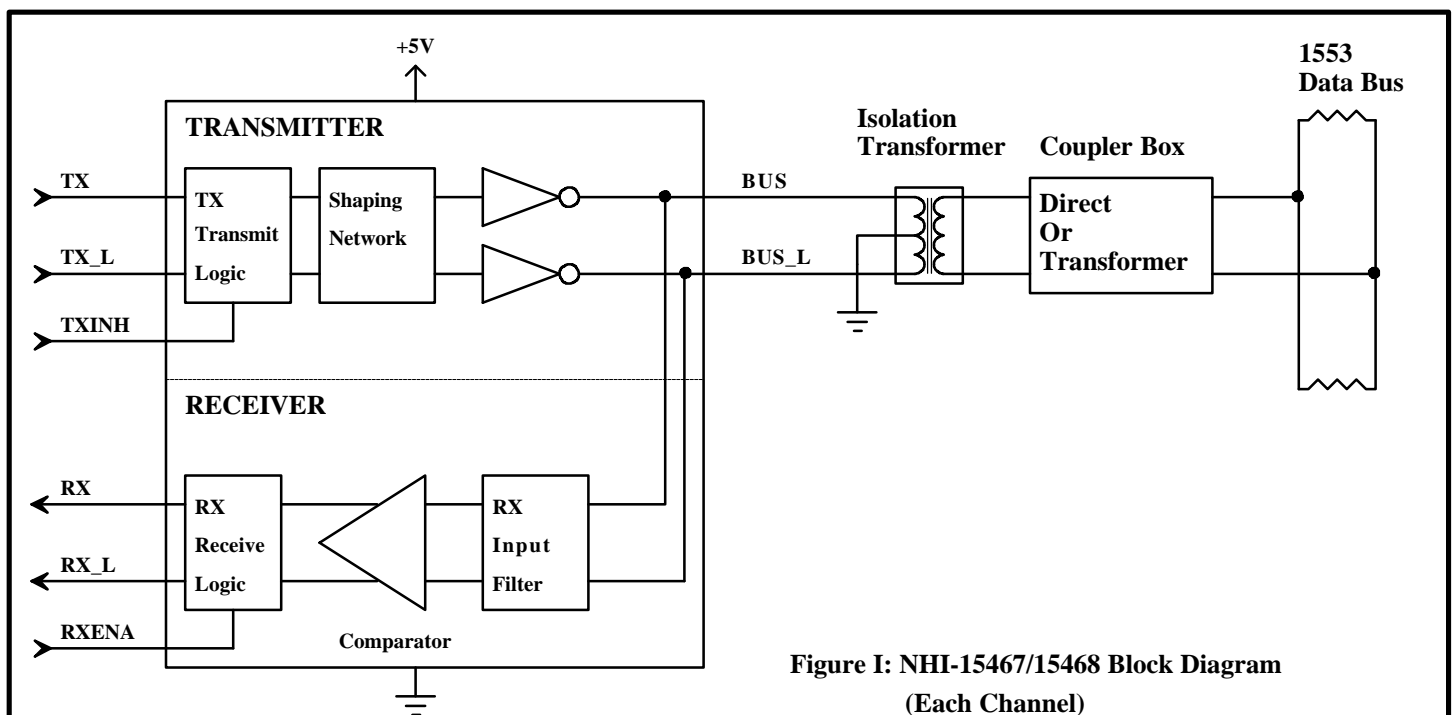


Figure I: NHI-15467/15468 Block Diagram  
(Each Channel)

# NHi-15467/468 Series

TABLE I: Electrical Specifications

Parameter	Condition	Symbol	Min	Typ	Max	Units
POWER SUPPLY REQUIREMENT		Vcc	4.7		5.5	V
TOTAL SUPPLY CURRENT	Vcc=5.0V, Not Transmitting	Icc1		70	80	mA
	Vcc=5.0V, Transmit one channel @ 50% duty cycle	Icc2		320	340	mA
	Vcc=5.0V, Transmit one channel @ 100% duty cycle	Icc3		570	615	mA
POWER DISSIPATION	Vcc=5.0V, Not Transmitting	Pd1			0.4	W
	Vcc=5.0V, Transmit one channel @ 100% duty cycle	Pd2			1.5	W
OPERATING TEMPERATURE	Junction	Tj	-55		165	°C
	Case	Tc	-55		125	°C
	Storage	Ts	-55		165	°C
THERMAL IMPEDANCE	Junction to Case	θjc			4	°C/W
<b>LOGIC I/O</b>						
RXENA_A, TXA, TXA_L, TXINH_A, RXENA_B, TXB, TXB_L, TXINH_B	Vcc= 5.5V, Vil= 0.0V	Iil			-0.4	mA
	Vcc= 4.7v, Vih= 2.7V	Iih			20	uA
RXA, RXA_L, RXB, RXB_L	Vcc= 5.5V, Iol= -4mA	Vol			0.4	V
	Vcc= 4.7v, Ioh= 400 uA	Voh	2.7			V
<b>RECEIVER</b>						
Input Resistance	Differential	Rin	20			k Ω
Input Capacitance	Differential	Cin			5	pF
Common Mode Rejection Ratio		CMRR	40			dB
Input Level	Differential	Vin			40	Vpp
<b>TRANSMITTER</b>						
Output Voltage	Across 140 Ω load	V <sub>out</sub>	29		36	Vpp
Rise/Fall Time	10% to 90% of peak to peak output	t <sub>r</sub> , t <sub>f</sub>	100	150	300	nS
Output DynamicOffset Voltage	Across 35 Ω load	V <sub>dyn</sub>	-90		90	mV
Output Noise	Differential	V <sub>npp</sub>			10	mVpp
Output Resistance	Differential, not transmitting	R <sub>out</sub>	10			kΩ

Note: Typical receiver threshold is 0.9v pk-pk, reference to the bus.


# NHI-15467/15468 Series

**Table II: Pin Functions**


Pin#	Function	Pin#	Function
1	+5V_A	20	TXA_L
2	BUS_A	19	TXA
3	BUS_A_L	18	TXINH_A
4	RXENA_A	17	RXA
5	GND_A	16	RXA_L
6	+5V_B	15	TXB_L
7	BUS_B	14	TX_B
8	BUS_B_L	13	TXINH_B
9	RXENA_B	12	RXB
10	GND_B	11	RXB_L

## Transformer Requirements:


The 467/468 series requires a transformer with a turns ratio of 1:2.5 for Direct Coupling, and a turns ratio of 1:1.79 for Transformer Coupling to the Mil-Std-1553 Bus. Technitrol part number Q1553-45 or equivalent is recommended. The center tap on the transceiver side of the isolation transformer must be grounded.

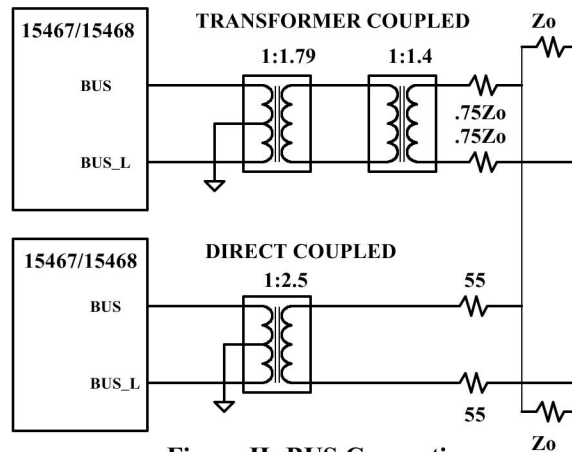

**Figure II: BUS Connections**

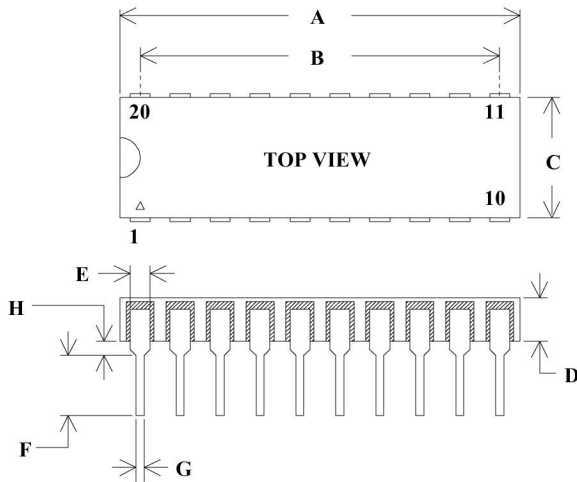

**Figure III: Plug-In Package Detail**

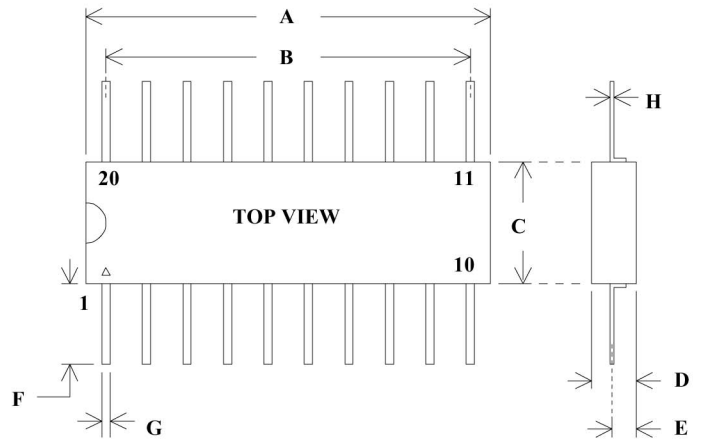

**Figure IV: Flatpack Package Detail**

**Table III: Plug-In Dimensions**

DIM	TYP (inches)	TOL (+/- inches)
A	1.000 "	0.010 "
B	9 EQ SP @	0.100 = 0.900 "
C	0.300 "	0.010 "
D	0.123"	0.012 "
E	0.050 "	TYP
F	0.150 "	MIN
G	0.018 "	0.002 "
H	0.035 "	0.010 "

**Table IV: Flatpack Dimensions**


DIM	TYP (inches)	TOL (+/- inches)
A	1.000 "	0.010 "
B	9 EQ SP @	0.100 = 0.900 "
C	0.300 "	0.010 "
D	0.123"	0.012 "
E	0.060 "	0.010 "
F	0.400 "	MIN
G	0.018 "	0.002 "
H	0.010 "	0.002 "



# NATIONAL HYBRID, INC.


2200 Smithtown Avenue, Ronkonkoma, NY 11779

(516) 981-2400 Sales FAX 516-981-8888

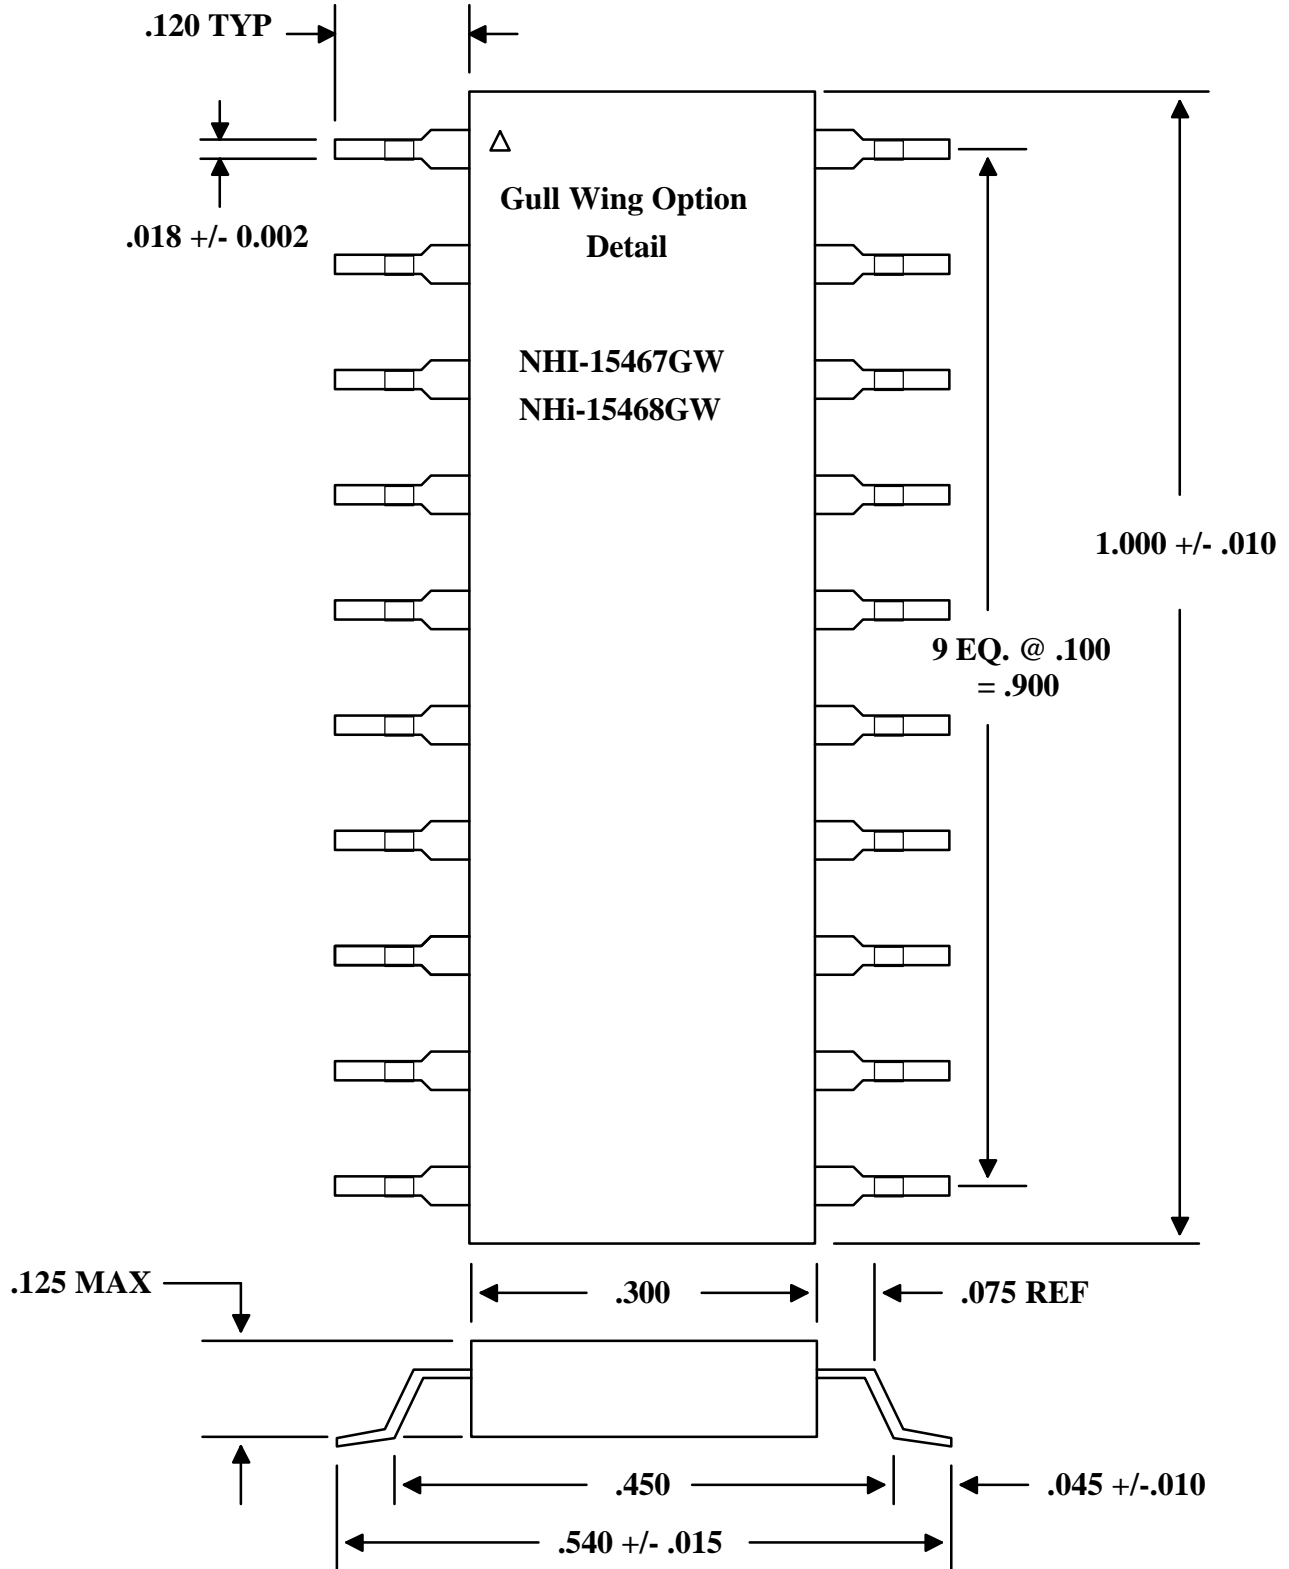

# NHI-15467/15468 Series


## Transmit Waveforms

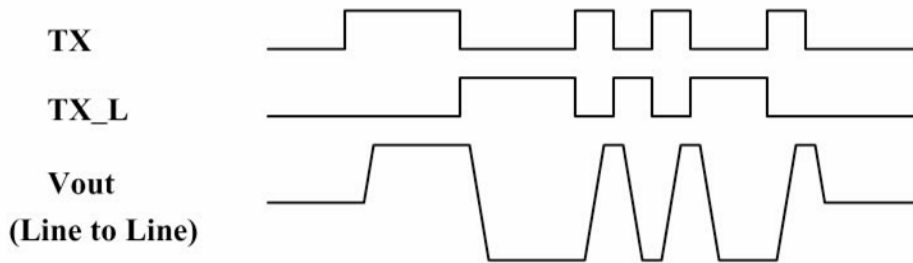

## Transmitter Operation:

A high level input on TXINH will inhibit the transmitter outputs. If the TX & TX\_L transmitter inputs are both high or both low, the transmitter is also inhibited. The transmitter TTL inputs should not be driven with steady state complimentary inputs. In the steady state condition, both TTL inputs must be at the same logic levels, both either high or low.

## Receive Waveforms

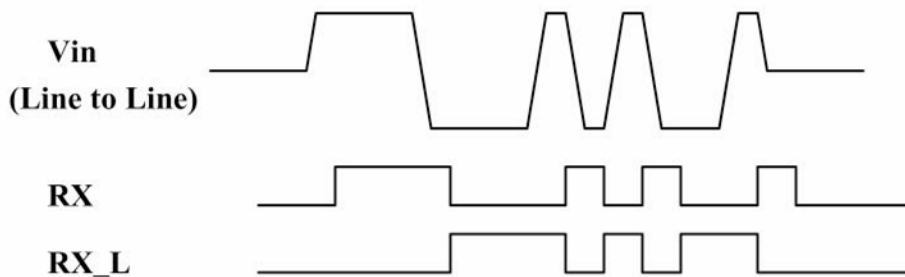

## Receiver Operation

A low level input on RXENA will disable the receiver outputs RX & RX\_L regardless of bus activity. The receiver output compatibility may be specified as logic 0 or logic 1 when in standby mode.

\*\* See Ordering Information

## Ordering Information:

NHI-15467 FP / 883

### Reliability Grade

883 = Fully Compliant with Mil-Std-883

M = Screened to Mil-Std-883, -55 to +125 °C

Blank = Industrial, -40 to +85 °C

### Package Style

Blank = Plug-In (Figure III)

FP = Flatpack (Figure IV)

### Transceiver Type and Decoder Compatibility

467 = Mil-Std-1553, RX & RX\_L, Standby = Logic 0

468 = Mil-Std-1553, RX & RX\_L, Standby = Logic 1

## See QML-38534 for NHI's Manufacturer Qualification Under Mil-PRF-38534

The information provided in this document is believed to be accurate. No responsibility is assumed by National Hybrid Inc. for its use, and no licence or rights are granted by implication or otherwise in connection therewith. Specifications are subject to change without notice.