

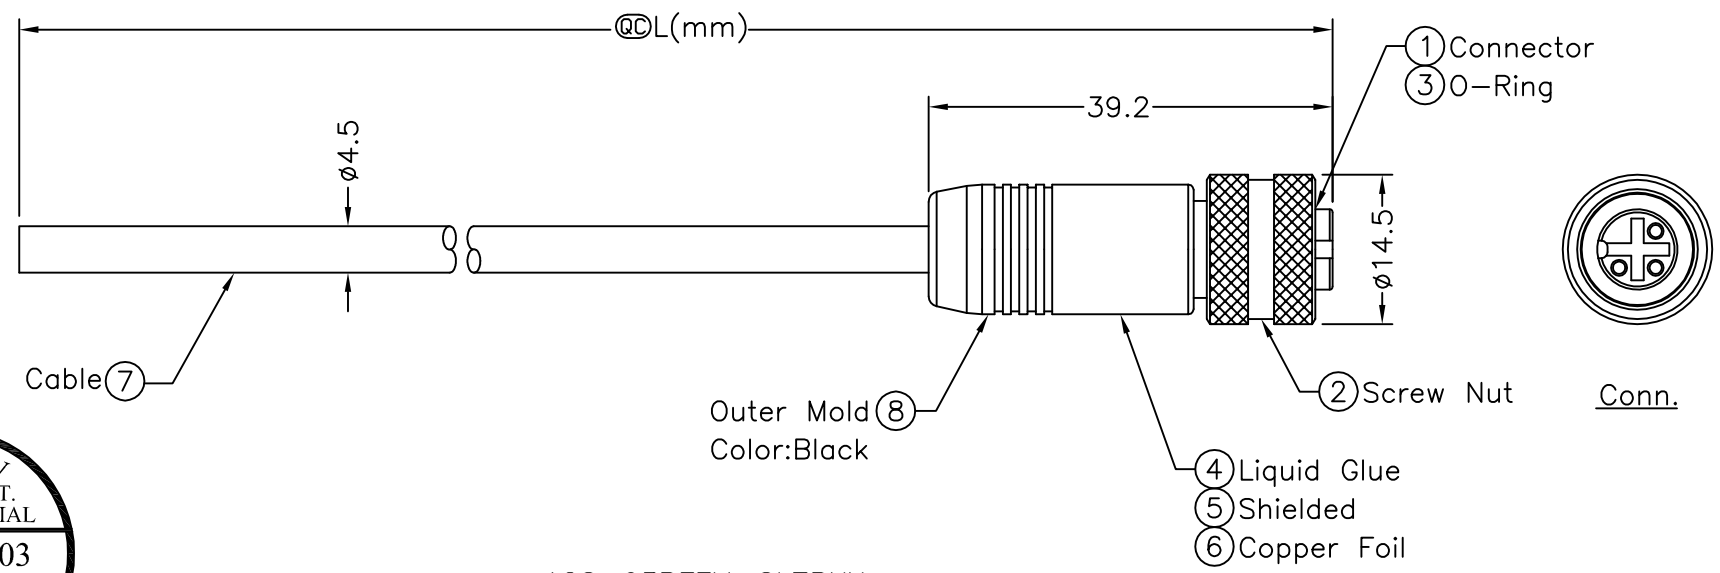
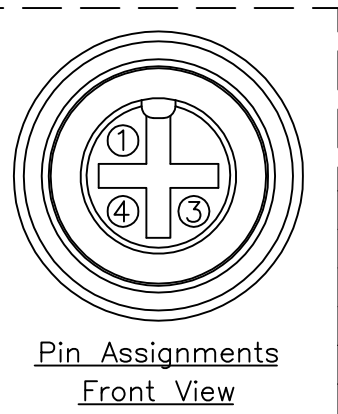


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-930042~045	2009/02/18	ZhaoRongFu	Update the drawing.



12S-03BFFM-SL7BXX  
 XX:01~99Meters  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters  
 Cable Length(L):01~99Meters

- Notes:
- \* @C Important Dimension.
  - \* Waterproof Rate:IP67.
  - \* Connector:Black,Nylon+GF.
  - \* Female Pin:Copper Alloy,Gold Plated.
  - \* Cable:22AWG\*3C+D+Al/My,Black, PU Jacket,OD=4.5mm.
  - \* Cable Length Tolerance: 01M:±40mm  
 02M~05M:±60mm  
 06M~10M:±100mm  
 11M~30M:±200mm  
 31M~99M:±500mm



Shield	Drain	地線
4	Black	黑
3	Blue	藍
1	Brown	棕
Conn.	Wire Color	
Pin Out		

UNIT:mm		TITLE	M12 Conn	
TOLERANCE		Cable Screw 3P F Conn F Pin		
±0.5 mm		SCALE	Free	SHEET 1 OF 1
1	2	REV.	B	SIZE A4 @C:Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
12S-03BFFM-SL7BXX	Zhao Rong Fu	2009/02/18
ALTW	Vicky	2009/02/26
	Luke	2009/02/26

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.