

< Power GaAs FET >

MGF1952A

Leadless ceramic package

DESCRIPTION

The MGF1952A power MES FET is designed for use in S to Ku band power amplifiers.

The lead-less ceramic package assures minimum parasitic losses.

FEATURES

High gain and High P1dB

Glp=7.0dB , P1dB=17dBm (Typ.) @ f=12GHz

APPLICATION

S to Ku band low noise amplifiers

QUALITY GRADE

GG

RECOMMENDED BIAS CONDITIONS

VDS=3V , ID=60mA

ORDERING INFORMATION

Tape & reel 3,000pcs/reel

RoHS COMPLIANT

MGF1952A is a RoHS compliant product. RoHS compliance is indicated by the letter "G" after the Lot Marking.

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Symbol	Parameter	Ratings	Unit
VGDO	Gate to drain voltage	-8	V
VGSO	Gate to source voltage	-8	V
ID	Drain current	240	mA
PT	Total power dissipation	600	mW
Tch	Channel temperature	125	°C
Tstg	Storage temperature	-65 to +125	°C

ELECTRICAL CHARACTERISTICS (Ta=25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			MIN.	TYP.	MAX	
V(BR)GDO	Gate to drain breakdown voltage	IG=-60μA	-8	-15	--	V
IDSS	Saturated drain current	VGS=0V, VDS=3V	65	120	240	mA
VGS(off)	Gate to source cut-off voltage	VDS=3V, ID=600μA	-0.3	-1.4	-3.5	V
P1dB	Output power at 1dB gain compression	VDS=3V, ID=30mA, f=12GHz	15	17	--	dBm
Glp	Linear power gain	VDS=3V, ID=60mA, f=12GHz, Pin=-5dBm	5	7	--	dB

Note: P1B and Glp are tested with sampling inspection.


Outline Drawing

Fig.1

MITSUBISHI Proprietary

Not to be reproduced or disclosed without permission by Mitsubishi Electric




Fig.1

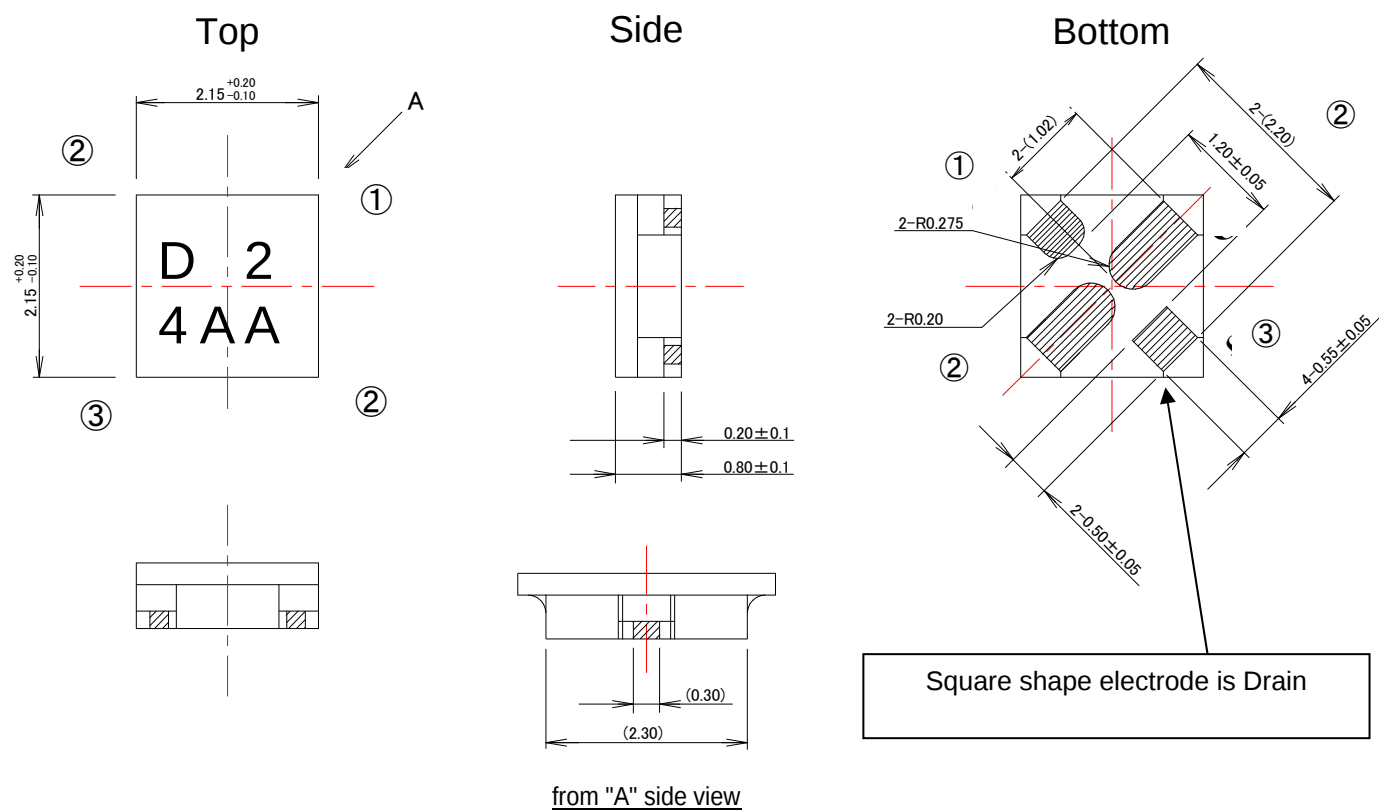

Unit: mm


- ① Gate
- ② Source
- ③ Drain

TYPICAL CHARACTERISTICS (Ta=25°C)

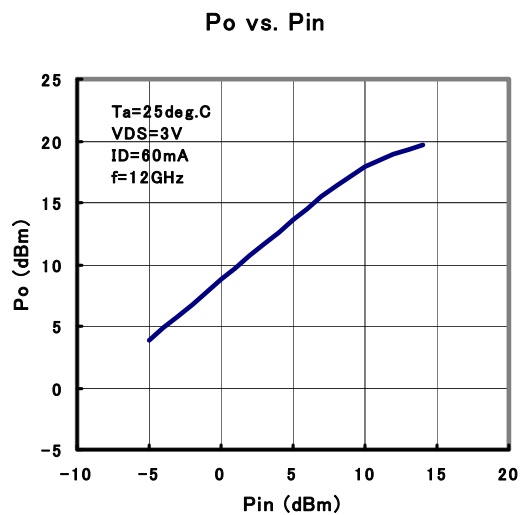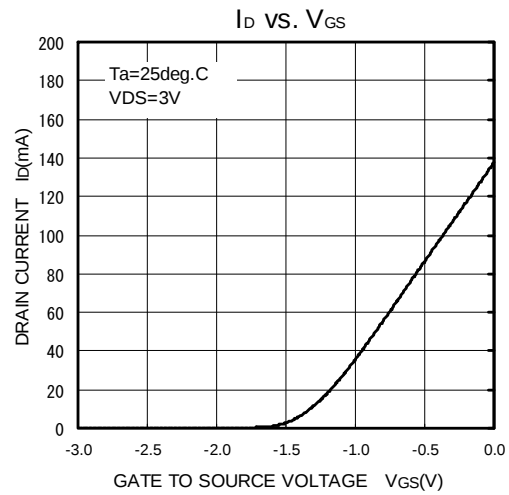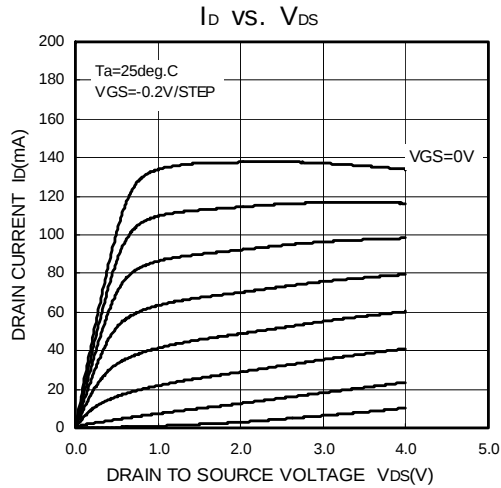

S PARAMETERS (VDS=3V, ID=60mA, Ta=room temperature)

Freq. (GHz)	S11		S21		S12		S22	
	(mag)	(ang)	(mag)	(ang)	(mag)	(ang)	(mag)	(ang)
1	0.959	-30.4	5.765	154.3	0.024	72.3	0.348	-17.5
2	0.884	-58.8	5.306	130.9	0.044	59.7	0.321	-34.7
3	0.797	-85.4	4.730	109.6	0.060	48.5	0.285	-49.5
4	0.723	-111.1	4.211	90.4	0.072	39.0	0.247	-63.9
5	0.669	-135.7	3.736	72.8	0.081	31.1	0.205	-81.3
6	0.626	-154.9	3.362	57.5	0.089	25.4	0.185	-86.3
7	0.591	-174.9	3.070	43.2	0.097	19.3	0.162	-93.2
8	0.564	165.3	2.835	28.8	0.106	13.7	0.137	-102.6
9	0.552	144.4	2.626	14.4	0.114	7.9	0.106	-119.5
10	0.561	122.9	2.439	0.0	0.121	0.9	0.078	-149.8
11	0.593	102.0	2.257	-14.7	0.129	-6.9	0.075	157.7
12	0.647	83.3	2.057	-29.2	0.134	-14.8	0.118	115.3
13	0.707	67.7	1.852	-43.1	0.135	-23.2	0.185	92.9
14	0.763	54.7	1.644	-56.6	0.133	-31.5	0.264	78.0
15	0.805	44.8	1.446	-68.5	0.130	-39.1	0.337	69.2
16	0.837	37.0	1.270	-79.6	0.125	-45.5	0.409	61.3
17	0.856	30.0	1.127	-89.5	0.120	-51.4	0.471	55.5
18	0.867	23.6	1.024	-99.1	0.118	-57.7	0.523	49.7
19	0.880	16.4	0.946	-108.7	0.118	-65.4	0.566	43.3
20	0.881	9.0	0.882	-118.7	0.114	-73.8	0.595	36.8

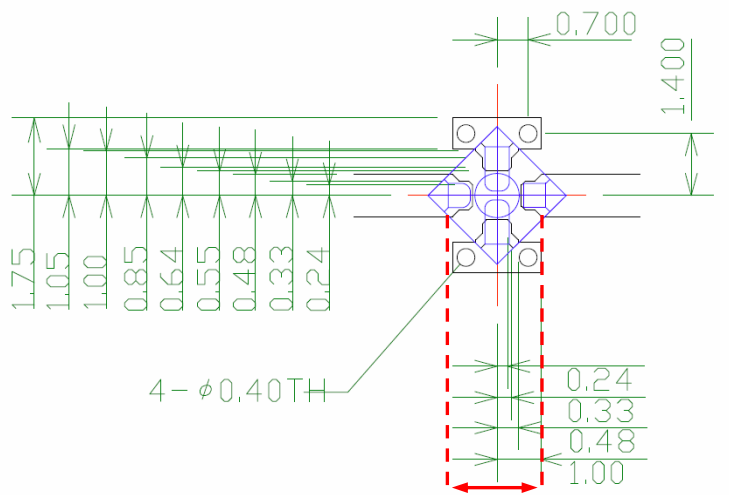

Measurement plane (2.2mm)

Recommended foot pattern; PTFE($\epsilon_r=2.60$, $t=0.40\text{mm}$)


Note:

We are ready to provide nonlinear model for ADS and MWO users. If you are interested, please contact our sales offices.

S PARAMETERS

(Conditions : $V_{DS}=3V, I_D=60mA, T_a=25deg.C$)

f (GHz)	S11		S21		S12		S22		K	MAG/MSG (dB)
	Mag.	Angle	Mag.	Angle	Mag.	Angle	Mag.	Angle		
1	0.963	-32.6	6.695	154.5	0.024	72.0	0.314	-24.7	0.21	24.4
2	0.888	-66.5	6.024	128.4	0.043	52.3	0.297	-51.3	0.38	21.4
3	0.822	-89.7	5.294	110.6	0.056	42.0	0.281	-66.0	0.51	19.7
4	0.764	-114.3	4.599	93.5	0.065	32.3	0.259	-83.0	0.64	18.5
5	0.720	-132.8	4.030	79.6	0.071	24.2	0.254	-94.1	0.77	17.5
6	0.685	-149.2	3.591	67.1	0.075	19.2	0.250	-100.0	0.90	16.8
7	0.660	-165.2	3.243	54.4	0.079	14.0	0.247	-104.2	1.01	15.5
8	0.643	-179.8	2.993	42.2	0.082	9.4	0.243	-108.3	1.10	13.7
9	0.629	165.3	2.785	30.5	0.088	4.4	0.232	-111.5	1.15	12.6
10	0.624	150.0	2.614	18.5	0.095	-0.8	0.214	-115.4	1.17	11.9
11	0.618	133.3	2.460	6.4	0.099	-8.3	0.179	-119.8	1.25	11.0
12	0.620	115.8	2.310	-6.9	0.104	-14.8	0.137	-125.6	1.29	10.2
13	0.639	98.6	2.163	-19.8	0.107	-21.6	0.085	-134.3	13.27	9.6
14	0.670	81.9	2.017	-33.9	0.111	-30.5	0.025	-176.9	1.32	9.2
15	0.709	66.3	1.846	-47.2	0.113	-39.4	0.063	61.7	1.33	8.7
16	0.765	52.1	1.700	-60.1	0.113	-48.6	0.145	47.0	1.25	8.8
17	0.815	37.9	1.537	-73.9	0.112	-57.5	0.237	37.8	1.18	8.8
18	0.850	25.1	1.353	-88.1	0.109	-67.0	0.328	29.2	1.16	8.5

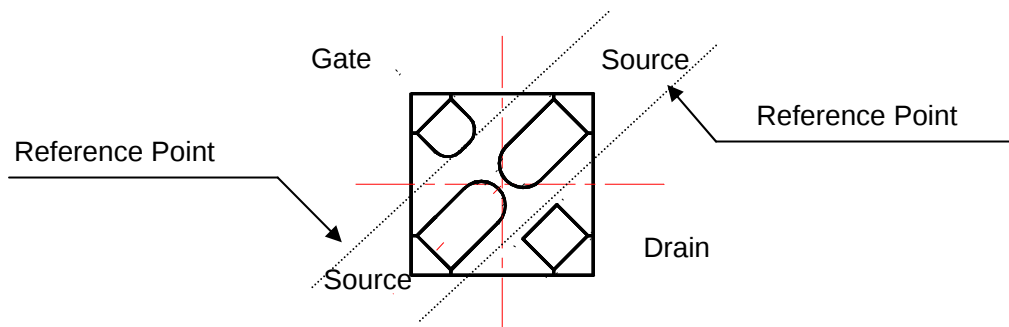

Keep safety first in your circuit designs!

- Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Mitsubishi semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors.
Mitsubishi Electric Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
Please also pay attention to information published by Mitsubishi Electric Corporation by various means, including the Mitsubishi Semiconductor home page (<http://www.mitsubishielectric.com/>).
- When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
- Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or re-export contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for further details on these materials or the products contained therein.