

Compact Photointerrupter with Connector


TLP1240 / TLP1250

 Overview


With unique new package style developed by Toshiba, these photointerrupters offer improved reliability and a high level of cost effectiveness.

Wide-range operating temperature ratings make them ideal for high-temperature operating environments such as paper ejection detectors in photocopiers and page printers and louver airflow direction detectors in fan-forced heaters.

Appearance

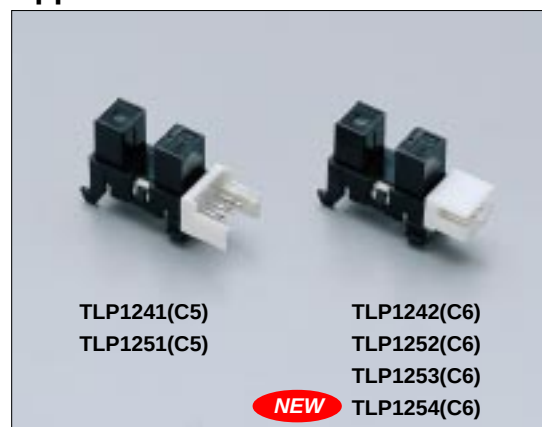

New Package

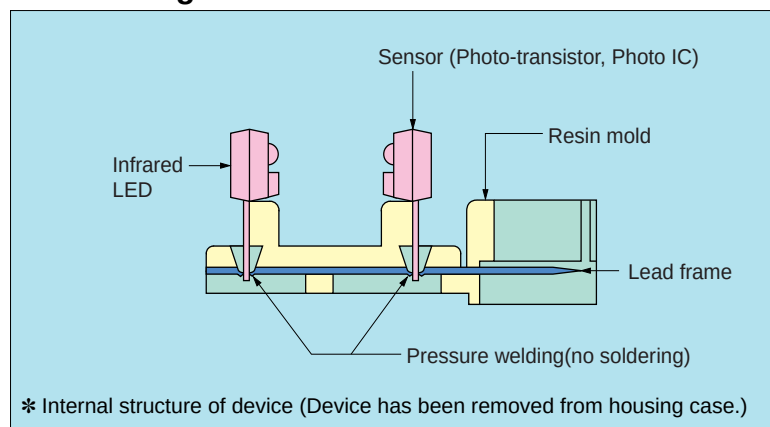

Features

NEW TLP1254(C6)

- Low-voltage drive, low current consumption
Operating voltage: $V_{cc} = 3.3\text{ V} \pm 10\%$
Current consumption: $I_{cc} = 11\text{ mA (max)}$,
the lowest in the industry
- High-speed response: $f = 5\text{ kHz (min)}$
Highest speed of any 3.3-V photointerrupter
- Can be used in high-temperature environments.
 $T_{opr} = 95^{\circ}\text{C (max)}$, the industry's highest

- Highly reliable new package
(no printed circuit board or soldering required)
- Snap-in connector allows quick installation
- Board mounting supported for three thicknesses
(1.0 mm, 1.2 mm, 1.6 mm)
- High-performance detection: Detection gap 5 mm,
slit width 0.5 mm
- High current transfer ratio: $I_C/I_F = 5\%$ (min) for
TLP1240 series
- Low current consumption: $I_{CC} = 14$ mA(max) for
TLP1251(C5)/TLP1252(C6)/TLP1253(C6)

Device	Detection Gap	Slit Width	Operating Voltage	Output when ON(lit)	Operating Temperature	Compatible Connector AMP(Japan),Ltd.CT
TLP1241(C5)	5mm	0.5mm	5V±10%	Photo-transistor ON	-30 to 95°C	2 mm pitch MT receptacle connector
TLP1242(C6)						2 mm pitch MT receptacle connector 2 mm pitch MT crimp receptacle connector type II
TLP1251(C5)				Low	-25 to 95°C	2 mm pitch MT receptacle connector
TLP1252(C6)				High	-30 to 95°C	2 mm pitch MT receptacle connector 2 mm pitch MT crimp receptacle connector type II
TLP1253(C6)			Low			
TLP1254(C6)						
			3.3V±10%			

Maximum Ratings (Ta=25°C)

TLP1240 Series

Rating	Symbol	Value	Unit
DC Forward current	I_F	50	mA
DC Reverse voltage	V_R	6	V
Collector-emitter voltage	V_{CEO}	35	
Emitter-collector voltage	V_{ECO}	5	
Collector power dissipation	P_C	75	mW
Collector current	I_C	50	mA
Operating temperature	T_{opr}	-30 to 95	°C
Storage temperature	T_{stg}	-40 to 100	

TLP1250 Series

Rating	Symbol	Value	Unit
Power supply voltage	V_{CC}	7.5 (5)	V
Output current	V_O	15	
Low-level output current	I_{OL}	16 (8)	mA
Operating temperature	T_{opr}	(Note) -30 to 95	°C
Storage temperature	T_{stg}	-40 to 100	

Note: For the TLP1251(C5) $T_{opr} = -25^\circ$ to 95°C

Values in parentheses () are ratings for the TLP1254(C6).

Electrical and Optical characteristics

TLP1240 Series (Ta = 25°C)


Characteristics	Symbol	Test Conditions	Min	Typ.	Max	Unit
Forward voltage	V_F	$I_F = 10\text{ mA}$	1.00	1.15	1.30	V
Reverse current	I_R	$V_R = 5\text{ V}$	—	—	10	μA
Peak emission wavelength	λ_p	$I_F = 10\text{ mA}$	—	940	—	nm
Dark current	I_D	$V_{CE} = 24\text{ V}, I_F = 0$	—	0.001	0.1	μA
Peak sensitivity wavelength	λ_p	—	—	870	—	nm
Current transfer ratio	I_C/I_F	$V_{CE} = 2\text{ V}, I_F = 10\text{ mA}$	5	—	100	%
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F = 20\text{ mA}, I_C = 0.5\text{ mA}$	—	0.1	0.35	V
Rise time	t_r	$V_{CC} = 5\text{ V}, I_C = 1\text{ mA}$ $R_L = 1\text{ k}\Omega$	—	15	50	μs
Fall time	t_f		—	15	50	

TLP1250 Series

Unless otherwise specified, TLP1251(C5) : $V_{CC} = 5\text{ V} \pm 10\%$, $T_a = -25$ to 95°C

TLP1252(C6) / TLP1253(C6) : $V_{CC} = 5\text{ V} \pm 10\%$, $T_a = -30$ to 95°C

TLP1254(C6) : $V_{CC} = 3.3\text{ V} \pm 10\%$, $T_a = -30$ to 95°C


Characteristics	Symbol	Test Conditions	Min	Typ.	Max	Unit
Operating power supply voltage	V_{CC}	TLP1254(C6)	4.5	5	5.5	V
Supply current	I_{CC}		2.97	3.3	3.63	
High-level output voltage	V_{OH}	(Note 1)	—	—	14	mA
		TLP1254(C6)	—	—	11	
Low-level output voltage	V_{OL}	$R_L = 47\text{ k}\Omega$, (Note 1)	$V_{CC} \times 0.9$	—	—	V
Peak emission wavelength	λ_p	$T_a = 25^\circ\text{C}$, (Note 2)	—	0.07	0.35	
		(Note 2)	—	—	0.4	
Peak sensitivity wavelength	λ_p	$T_a = 25^\circ\text{C}$	—	940	—	nm
Response frequency	f	$R_L = 4.7\text{ k}\Omega$, $T_a = 25^\circ\text{C}$	5	—	—	kHz
Rise time	t_r		—	0.5	—	μs
Fall time	t_f		—	0.02	—	

Notes: 1. TLP1252(C6) when lit and TLP1251(C5)/TLP1253(C6)/TLP1254(C6) when not lit.


2. TLP1252(C6): $I_{OL} = 16\text{ mA}$ when not lit. TLP1251(C6)/TLP1253(C6): $I_{OL} = 16\text{ mA}$ when lit. TLP1254(C6): $I_{OL} = 8\text{ mA}$ when lit.

Package Dimensions

TLP1241(C5) / TLP1251(C5)

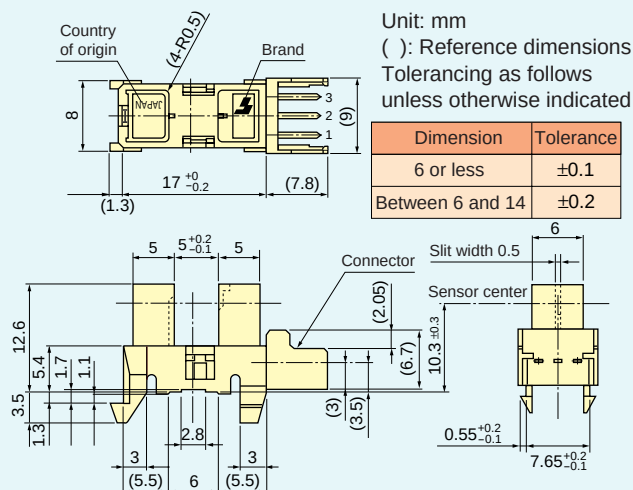


TLP1242(C6) / TLP1252(C6) / TLP1253(C6) / TLP1254(C6)

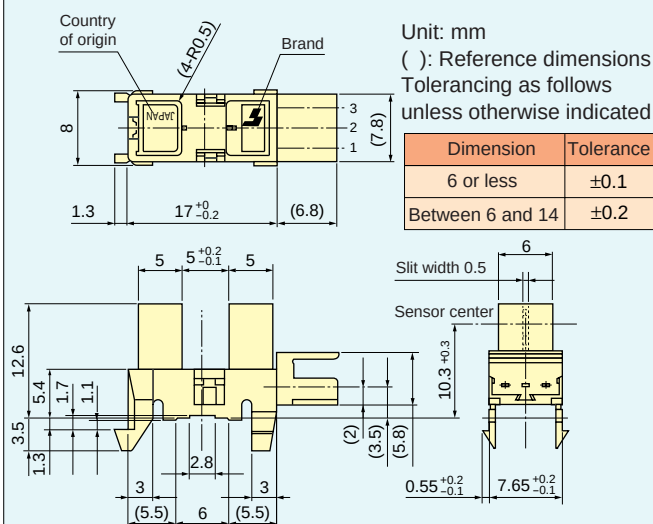


Pin Connection Diagram


TLP1241(C5) / TLP1242(C6)

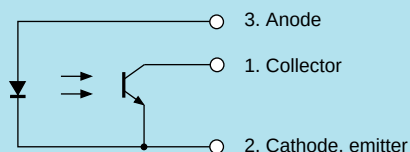

TLP1251(C5) / TLP1253(C6) / TLP1254(C6)

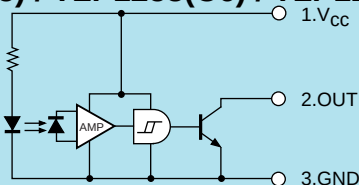


TLP1252(C6)

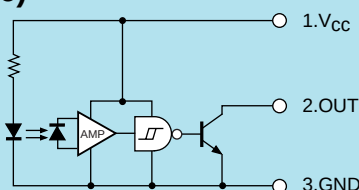


Detection versus Position Characteristics

TLP1240 Series

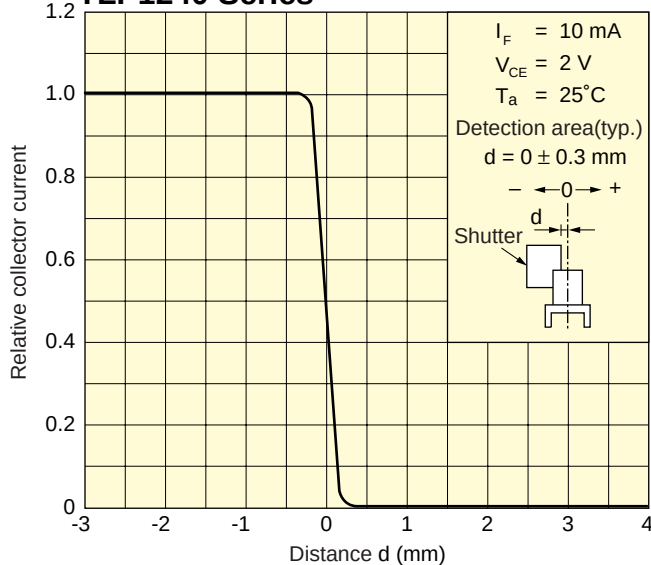


TLP1250 Series

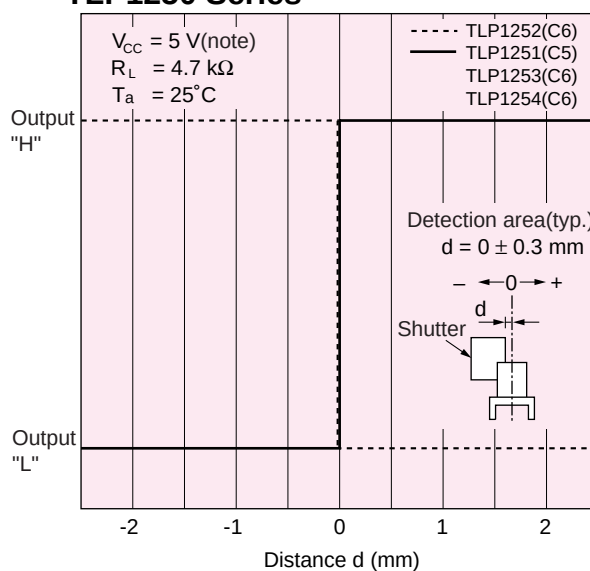


Note: TLP1254(C6) $V_{CC} = 3.3 \text{ V}$

Copier

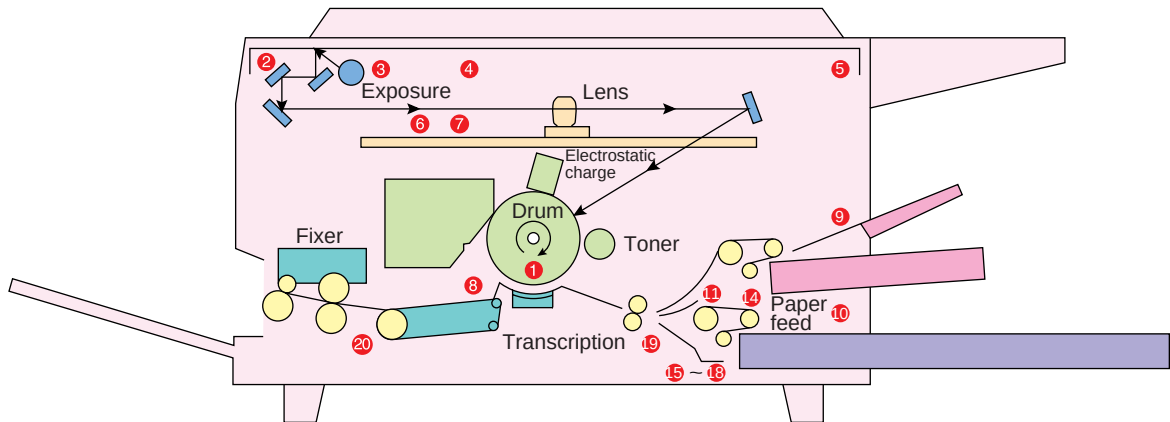

- | | |
|---|--|
| ① Drum position detection | ⑨, ⑩ No-paper detection |
| ② to ⑤ Optical bench position detection | ⑪ to ⑭ Upper cassette paper feed detection |
| ⑥, ⑦ Lens position detection | ⑮ to ⑰ Lower cassette paper feed detection |
| ⑧ Paper separation detection | ⑱, ⑳ Paper feed and ejection detection |

Page Printer

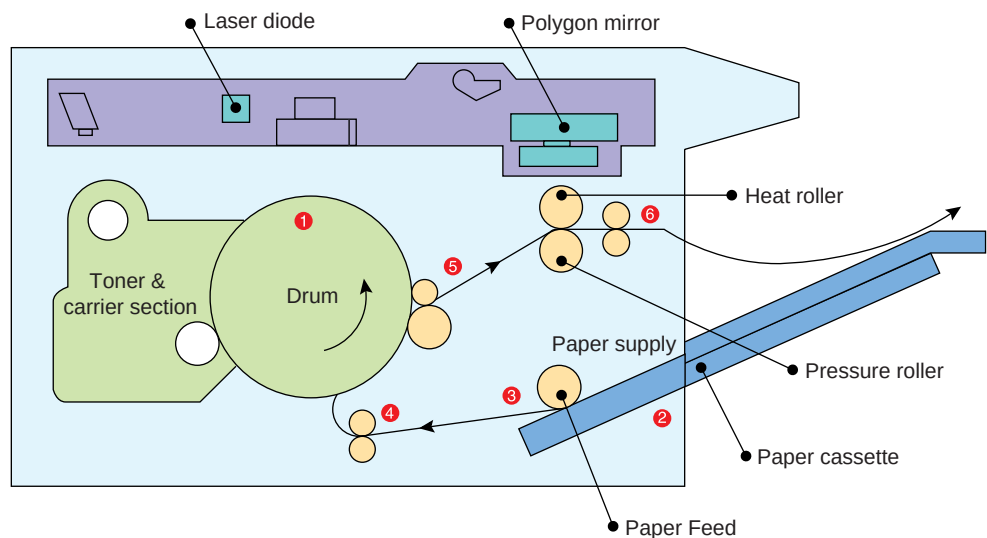

- | | |
|---------------------------|------------------------------|
| ① Drum rotation detection | ⑤ Paper separation detection |
| ② No-paper detection | ⑥ Paper ejection detection |
| ③, ④ Paper feed detection | |

**Toshiba America
Electronic Components, Inc.**
Headquarters-Irvine, CA

9775 Toledo Way, Irvine, CA 92618, U.S.A.
Tel: (949)455-2000 Fax: (949)859-3963

Boulder, CO

3100 Arapahoe Avenue, Ste. 500,
Boulder, CO 80303, U.S.A.
Tel: (303)442-3801 Fax: (303)442-7216

Boynton Beach, FL(Orlando)

11924 W. Forest Hill Blvd., Ste. 22-337,
Boynton Beach, FL 33414, U.S.A.
Tel: (561)374-6193 Fax: (561)374-6194

Deerfield, IL(Chicago)

One Pkwy., North, Suite 500, Deerfield,
IL 60015-2547, U.S.A.
Tel: (847)945-1500 Fax: (847)945-1044

Duluth, GA(Atlanta)

3700 Crestwood Parkway, Ste. 460,
Duluth, GA 30096, U.S.A.
Tel: (770)931-3363 Fax: (770)931-7602

Edison, NJ

2035 Lincoln Hwy. Ste. #3000, Edison
NJ 08817, U.S.A.
Tel: (732)248-8070 Fax: (732)248-8030

Orange County, CA

2 Venture Plaza, #500 Irvine, CA 92618, U.S.A.
Tel: (949)453-0224 Fax: (949)453-0125

Portland, OR

1700 NW 167th Place, #240,
Beaverton, OR 97006, U.S.A.
Tel: (503)629-0818 Fax: (503)629-0827

Richardson, TX(Dallas)

777 East Campbell Rd., Suite 650, Richardson,
TX 75081, U.S.A.
Tel: (972)480-0470 Fax: (972)235-4114

San Jose Engineering Center, CA

1060 Rincon Circle, San Jose, CA 95131, U.S.A.
Tel: (408)526-2400 Fax: (408)526-2410

Wakefield, MA(Boston)

401 Edgewater Place, Suite #360, Wakefield,
MA 01880-6229, U.S.A.
Tel: (781)224-0074 Fax: (781)224-1095

Toshiba Electronics Europe GmbH
Düsseldorf Head Office

Hansaallee 181, D-40549 Düsseldorf
Germany
Tel: (0211)5296-0 Fax: (0211)5296-400

München Office

Büro München Hofmannstrasse 52,
D-81378, München, Germany
Tel: (089)748595-0 Fax: (089)748595-42

Toshiba Electronics France SARL

Immeuble Robert Schumann 3 Rue de Rome,
F-93561, Rosny-Sous-Bois, Cedex, France
Tel: (1)48-12-48-12 Fax: (1)48-94-51-15

Toshiba Electronics Italiana S.R.L.

Centro Direzionale Colleoni
Palazzo Perseo Ingr. 2-Piano 6,
Via Paracelso n.12,
1-20041 Agrate Brianza Milan, Italy
Tel: (039)68701 Fax: (039)6870205

Toshiba Electronics España, S.A.

Parque Empresarial San Fernando Edificio Europa,
1ª Planta, ES-28831 Madrid, Spain
Tel: (91)660-6700 Fax: (91)660-6799

Toshiba Electronics(UK) Limited

Riverside Way, Camberley Surrey,
GU15 3YA, U.K.
Tel: (01276)69-4600 Fax: (01276)69-4800

Toshiba Electronics Scandinavia AB

Gustavslundsvägen 12, 2nd Floor
S-161 15 Bromma, Sweden
Tel: (08)704-0900 Fax: (08)80-8459

**Toshiba Electronics Asia
(Singapore) Pte. Ltd.**

Singapore Head Office
438B Alexandra Road, #06-08/12 Alexandra
Technopark, Singapore 119968
Tel: (278)5252 Fax: (271)5155, (270)6056

Bangkok Office

135 Moo 5 Bangkadi Industrial Park, Tivanon Rd.,
Bangkadi Amphur Muang Pathumthani, Bangkok,
12000, Thailand
Tel: (02)501-1635 Fax: (02)501-1638

**Toshiba Electronics Trading
(Malaysia)Sdn. Bhd.**

Kuala Lumpur Head Office
Suite W1203, Wisma Consplant, No.2,
Jalan SS 16/4, Subang Jaya, 47500 Petaling Jaya,
Selangor Darul Ehsan, Malaysia
Tel: (3)731-6311 Fax: (3)731-6307

Penang Office

Suite 13-1, 13th Floor, Menard Penang Garden,
42-A, Jalan Sultan Ahmad Shah,
100 50 Penang, Malaysia
Tel: 4-226-8523 Fax: 4-226-8515

Toshiba Electronics Philippines, Inc.

26th Floor, Citibank Tower, Valero Street, Makati,
Manila, Philippines
Tel: (02)750-5510 Fax: (02)750-5511

Toshiba Electronics Asia, Ltd.
Hong Kong Head Office

Level 11, Top Glory Insurance Building, Grand Century
Place, No.193, Prince Edward Road West,
Mong Kok, Kowloon, Hong Kong
Tel: 2375-6111 Fax: 2375-0969

Beijing Office

Rm 714, Beijing Fortune Building,
No.5 Dong San Huan Bei-Lu, Chao Yang District,
Beijing, 100004, China
Tel: (010)6590-8795 Fax: (010)6590-8791

Chengdu Office

Unit F, 18th Floor, New Times Plaza, 42 Wenwu Road,
Xinhua Avenue, Chengdu, 610017, China
Tel: (028)675-1773 Fax: (028)675-1065

Shenzhen Office

Rm 3010-3012, Office Tower Shun Hing Square,
Di Wang Commercial Centre, 333 ShenNan
East Road, Shenzhen, 518008, China
Tel: (0755)246-1582 Fax: (0755)246-1581

Toshiba Electronics Korea Corporation
Seoul Head Office

14/F, KEC B/D, 257-7 Yangjae-Dong,
Seocho-ku, Seoul, Korea
Tel: (02)589-4334 Fax: (02)589-4302

Kumi Office

6/F, Ssangyong Investment Securities B/D,
56 Songjung-Dong, Kumi City
Kyeongbuk, Korea
Tel: (82)546-456-7613 Fax: (82)546-456-7617

**Toshiba Technology Development
(Shanghai) Co., Ltd.**

23F, Shanghai Senmao International Building, 101
Yin Cheng East Road, Pudong New Area, Shanghai,
200120, China
Tel: (021)6841-0666 Fax: (021)6841-5002

**Tsurong Xiamen Xiangyu Trading
Co., Ltd.**

8N, Xiamen SEZ Bonded Goods Market Building,
Xiamen, Fujian, 361006, China
Tel: (0592)562-3798 Fax: (0592)562-3799

**Toshiba Electronics Taiwan
Corporation**
Taipei Head Office

17F, Union Enterprise Plaza Bldg. 109
Min Sheng East Rd., Section 3, 0446 Taipei,
Taiwan
Tel: (02)514-9988 Fax: (02)514-7892

Kaohsiung Office

16F-A, Chung-Cheng Bldg., Chung-Cheng 3Rd.,
80027, Kaohsiung, Taiwan
Tel: (07)222-0826 Fax: (07)223-0046

The information contained herein is subject to change without notice.

The information contained herein is presented only as a guide for the applications of our products.
No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.

TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

Gallium arsenide (GaAs) is a substance used in some of the products described in this documents. GaAs dust and fumes are toxic. Do not break, cut or pulverize the products, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.

In Touch with Tomorrow
TOSHIBA

TOSHIBA CORPORATION
Electronic Devices Sales & Marketing Group

1-1, Shibaura 1-chome, Minato-ku, Tokyo, 105-8001, Japan
Tel: (03)3457-3405 Fax: (03)5444-9431