

## Standard Products

# ACT4402 Single Transceiver

for MIL-STD-1553 A/B, MIL-STD-1760 & SAE-AS15531

[www.aeroflex.com/Avionics](http://www.aeroflex.com/Avionics)

May 11, 2005



## FEATURES

- Small size, light weight and low power dissipation single transceiver
- +5VDC / ±15VDC power supply operation
- Outstanding MIL-STD-1553 / SAE-AS15531 performance
- Monolithic construction
- Input and output TTL compatible design
- Replacement for Aeroflex's 3402 & 2402
- Designed for commercial, industrial and aerospace applications
- MIL-PRF-38534 compliant devices available
- Aeroflex-Plainview is a Class H & K MIL-PRF-38534 manufacturer
- Packaging – Hermetic Ceramic
  - Available in a 24pin Ceramic Housing which is 21% smaller than the metal plug-in
  - Non-conductive mounting surface
  - No package glass beads
  - Small size & light weight

## DESCRIPTION

The Aeroflex-Plainview ACT4402 is the next generation monolithic transceiver design which provides full compliance with MIL-STD-1553A/B, MIL-STD-1760 and meets SAE-AS15531 requirements in a small ceramic package with low power consumption. The series performs the front-end analog function of inputting and outputting data through a transformer to the MIL-STD-1553 data bus.

Design of these transceivers reflects particular attention to active filter performance. This results in low bit and word error rate with superior waveform purity and minimal zero crossover distortion. Efficient transmitter electrical and thermal design provides low internal power dissipation and heat rise at high as well as low duty cycles.


## TRANSMITTER

The transmitter section accepts bi-phase TTL data at the input and when coupled to the data bus with a 1.4:1 ratio transformer the data bus signal is typically 7.5 Volts P-P at Point A (See Figure 5). When both DATA and  $\overline{\text{DATA}}$  inputs are held low or high, the transmitter output becomes a high impedance and is “removed” from the line. In addition, an overriding “INHIBIT” input provides for the removal of the transmitter output from the line. A logic “1” applied to the “INHIBIT” takes priority over the condition of the data inputs and disables the transmitter (See Figure 1 Transmitter Logic Waveform). The Transmitter may be safely operated for an indefinite period with the bus (Point A) short circuited at 100% duty cycle.


## RECEIVER

The Receiver section accepts bi-phase differential data at the input and produces two TTL signals at the output. The outputs are DATA and  $\overline{\text{DATA}}$ , and represent positive and negative excursions of the input beyond a pre-determined threshold (See Figure 2 Receiver Logic Waveform).

The pre-set internal thresholds will detect data bus signals exceeding 1.20 Volts P-P and reject signals less than 0.6 Volts P-P when used with a transformer (See Figure 5 for transformer data and typical connections). A low level at the RX Strobe input inhibits the DATA and  $\overline{\text{DATA}}$  outputs. If unused RX Strobe is internally pulled high.

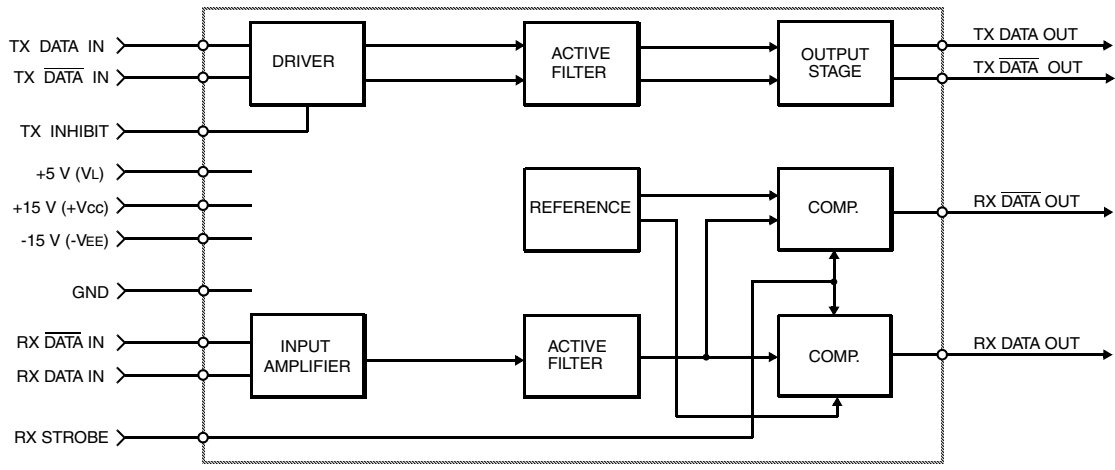


**BLOCK DIAGRAM (WITHOUT TRANSFORMER)**

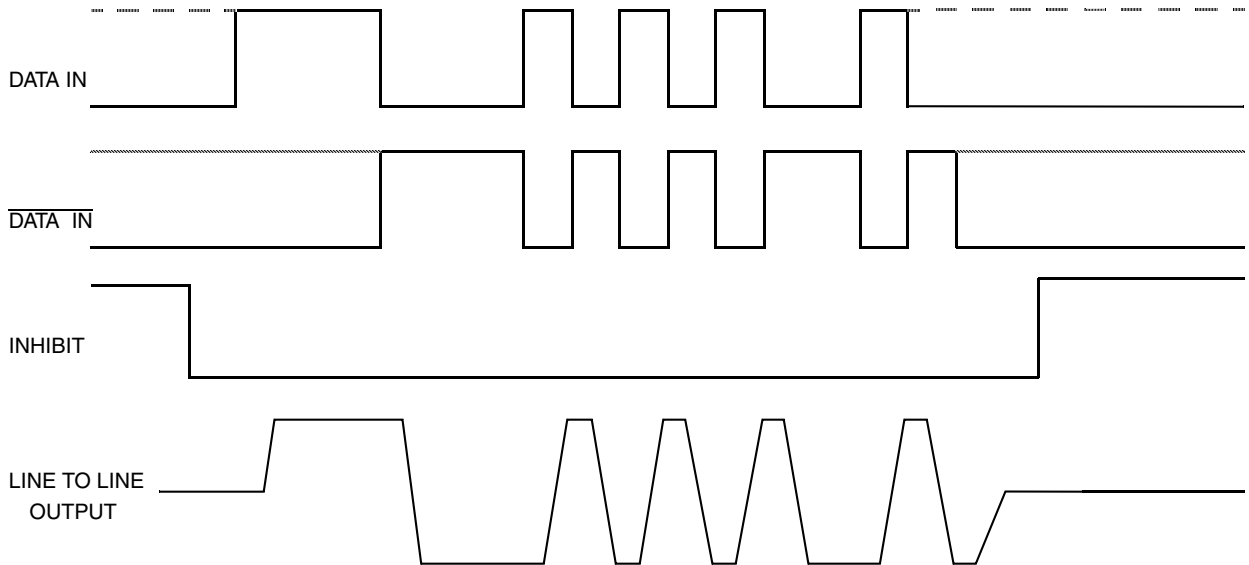

Note: DATA and  $\overline{\text{DATA}}$  inputs must be complementary waveforms or 50% duty cycle average, with no delays between them, and must be in the same state during off times (both high or low).

**FIGURE 1 – TRANSMITTER LOGIC WAVEFORMS IDEALIZED**

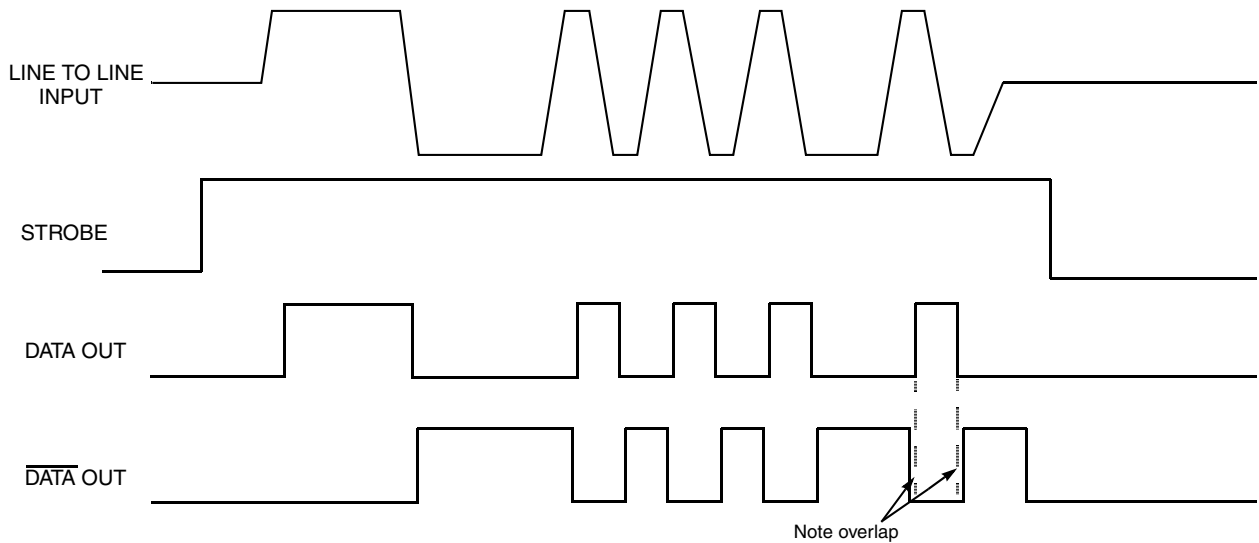

**FIGURE 2 – RECEIVER LOGIC WAVEFORMS IDEALIZED**

## ABSOLUTE MAXIMUM RATINGS

Operating case temperature	-55°C to +125°C
Storage case temperature	-65°C to +150°C
Power supply voltage VCC VEE VL	-0.3 VDC to +18 VDC +0.3 VDC to -18 VDC -0.3 VDC to +7.0 VDC
Logic input voltage	-0.3VDC to +5.5VDC
Receiver differential input	±40 Vp-p
Receiver input voltage (common mode)	±10V
Driver peak output current	200 mA
Total package power dissipation over the full operating case temperature range	2.5 Watts
Maximum junction to case temperature	10°C
Thermal resistance – Junction to case	4°C/W

## ELECTRICAL CHARACTERISTICS – DRIVER SECTION (Note 2)

### INPUT CHARACTERISTICS, TX DATA IN OR TX DATA IN

Parameter	Condition	Symbol	Min	Typ	Max	Unit
"0" Input Current	V <sub>IN</sub> = 0.4V	I <sub>ILD</sub>	-	-0.2	-0.2	mA
"1" Input Current	V <sub>IN</sub> = 2.7V	I <sub>IHD</sub>	-	1	40	μA
"0" Input Voltage		V <sub>ILD</sub>	-	-	0.7	V
"1" Input Voltage		V <sub>IHD</sub>	2.0	-	-	V

### INHIBIT CHARACTERISTICS

"0" Input Current	V <sub>IN</sub> = 0.4V	I <sub>ILI</sub>	-	-0.1	-0.2	mA
"1" Input Current	V <sub>IN</sub> = 2.7V	I <sub>IHI</sub>	-	1.0	40	μA
"0" Input Voltage		V <sub>ILI</sub>	-	-	0.7	V
"1" Input Voltage		V <sub>IHI</sub>	2	-	-	V
Delay from TX inhibit, (0→1) to inhibited output		t <sub>DXOFF</sub>	-	175	200	nS
Delay from TX inhibit, (1→0) to active output		t <sub>DXON</sub>	-	90	200	nS
Differential Output Noise, inhibit mode		V <sub>NOI</sub>	-	2	10	mVp-p
Differential Output Impedance (inhibited) Note 1 See Figure 5	Point B	Z <sub>OI</sub>	2K	-	-	Ω
	Point C	Z <sub>OI</sub>	1K	-	-	Ω

### OUTPUT CHARACTERISTICS

Differential output level	Figure 5 Point A	V <sub>O</sub>	6	7.5	9	Vp-p
Rise and fall times (10% to 90% of p-p output)		t <sub>r</sub>	100	160	200	nS
Output offset. See Figure 3. 2.5 μS after midpoint crossing of the parity bit of the last word of a 660μS message.		V <sub>OS</sub>	-	-	±90	mVpeak
Delay from 50% point of TX DATA or TX DATA input to zero crossing of differential signal		t <sub>DTX</sub>	-	100	200	nS

## ELECTRICAL CHARACTERISTICS – RECEIVER SECTION (Note 2)

Parameter	Condition	Symbol	Min	Typ	Max	Unit
Differential Voltage Range (See Figure 5, Point B)	TXFMR 1.4:1	$V_{IDR}$	-	-	40	Vp-p
Common Mode Rejection Ratio	Note 3	CMRR	45	-	-	dB
"1" State – Rx Data or Rx $\overline{\text{Data}}$ Output	$I_{OH} = -0.4 \text{ mA}$	$V_{OH}$	2.5	3.7	-	V
"0" State – Rx Data or Rx $\overline{\text{Data}}$ Output	$I_{OI} = 4 \text{ mA}$	$V_{OL}$	-	0.35	0.5	V
Delay (average) from Differential Input Zero Crossings to RX DATA and RX $\overline{\text{DATA}}$ Output 50% points		$t_{DRX}$	-	270	400	nS
Input Threshold Voltage (referred to the bus)	100KHz–1MHz	$V_{TH}$	0.60	0.75	1.20	Vp-p

### STROBE CHARACTERISTICS (LOGIC "0" INHIBITS OUTPUT)

"0" Input Current	$V_S = 0.4V$	$I_{IL}$	-	-0.2	-0.4	mA
"1" Input Current	$V_S = 2.7V$	$I_{IH}$	-	1	+40	$\mu\text{A}$
"0" Input Voltage		$V_{IL}$	-	-	0.7	V
"1" Input Voltage		$V_{IH}$	2.0	-	-	V
Strobe Delay (Turn-on or Turn-off)		$t_{SD}$	-	50	100	nS

### POWER DATA (Note 2)

#### POWER SUPPLY CURRENTS – PER CHANNEL


Transmitter Standby	Note 4	$I_{CC}$	-	0	1	mA
		$I_{EE}$	-	12	16	
		$I_L$	-	18	30	
25% Duty Cycle		$I_{CC}$	-	45	50	
	$I_{EE}$	-	12	20		
	$I_L$	-	18	30		
50% Duty Cycle	$I_{CC}$	-	90	100		
	$I_{EE}$	-	12	20		
	$I_L$	-	18	30		
100% Duty Cycle	$I_{CC}$	-	180	200		
	$I_{EE}$	-	12	20		
	$I_L$	-	18	30		

#### POWER SUPPLY VOLTAGE

$\pm 15V$ Operating Power Supply Voltage Range		$V_{CC}$	+14.25	+15.00	+15.75	V
		$V_{EE}$	-14.25	-15.00	-15.75	V
+5V Operating Power Supply Voltage Range		$V_L$	+4.50	+5.00	+5.50	V

#### NOTES:


- Power on or off, measured from 75KHz to 1MHz at Point A and transformer self impedance of  $3K\Omega$  minimum at 1MHz.
- Power Supplies:  $\pm 15VDC \pm 0.75V$  &  $+5VDC \pm 0.5V$ , bypassed by  $10 \mu\text{F}$  (Tantalum recommended) Capacitor minimum.  
All measurements & specifications apply over the temperature range of  $-55^\circ\text{C}$  to  $+125^\circ\text{C}$  (case temperature) unless otherwise specified.
- When measured as shown in Figure 5 with  $\pm 10V_{PK}$ , line to ground, DC to 2MHz.
- Typical power is measured with  $V_{BUS}$  at Point A =  $7.5 V_{p-p}$ .

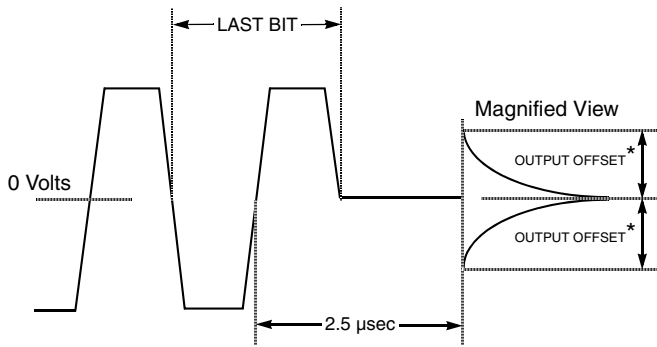


\*Offset measured at Point A in Figure 5

**FIGURE 3 – TRANSMITTER (TX) OUTPUT OFFSET**

**Transformer Coupled Stub**

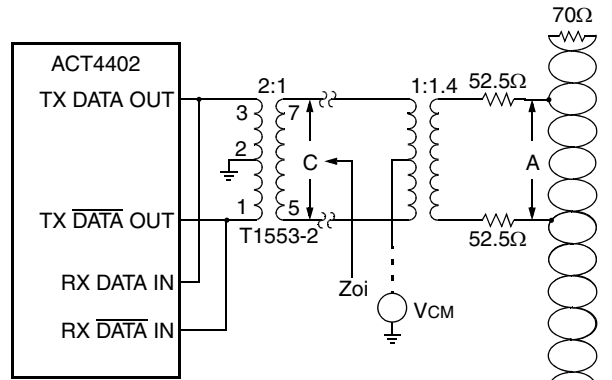


**Direct Coupled Stub**

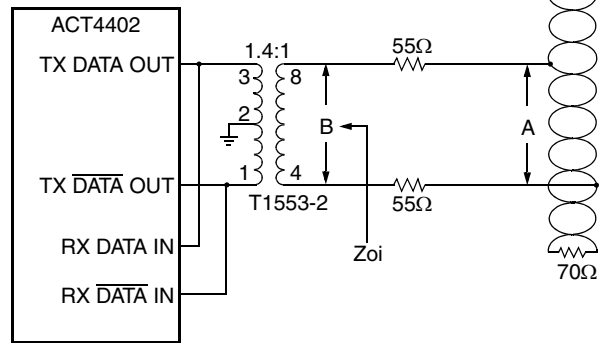

Transformer Model use Technitrol Part# 1553-2 or equivalent

**FIGURE 5 – TYPICAL 1553 BUS CONNECTIONS**

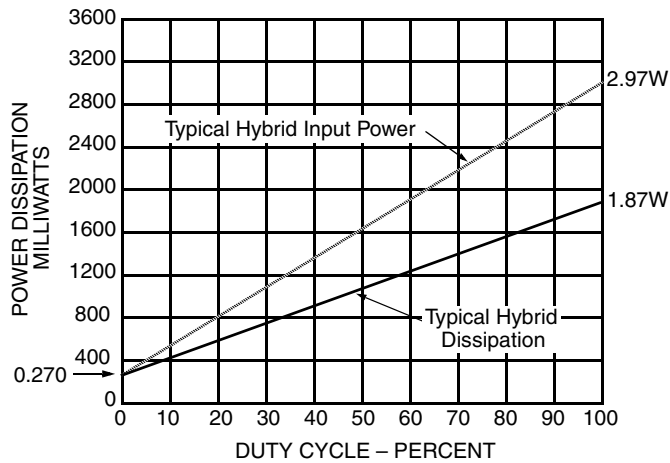

Note:  $V_{CC} = +15V$ ,  $V_{EE} = -15V$ ,  $V_L = +5V$ , Transformer ratio 1.4:1,  $V_{BUS}$  (Point A) at 7.5VP-P.

**FIGURE 4 – POWER DISSIPATION VS. DUTY CYCLE**


## PIN NUMBERS & FUNCTIONS

Pin #	Function
1	TX DATA OUT
2	TX $\overline{\text{DATA}}$ OUT
3	GROUND
4	NC
5	NC
6	NC
7	RX DATA OUT
8	STROBE
9	GROUND
10	RX $\overline{\text{DATA}}$ OUT
11	NC
12	NC
13	Vcc
14	NC
15	RX DATA IN
16	RX $\overline{\text{DATA}}$ IN
17	NC
18	GROUND
19	VEE
20	+5 V
21	TX INHIBIT
22	TX DATA IN
23	TX $\overline{\text{DATA}}$ IN
24	NC

## CONFIGURATIONS AND ORDERING INFORMATION

Model No.	Rx Standby	Case Style
ACT4402	Normally Low	Ceramic Dip
ACT4402-I	Normally High	

## CERAMIC PACKAGE OUTLINE

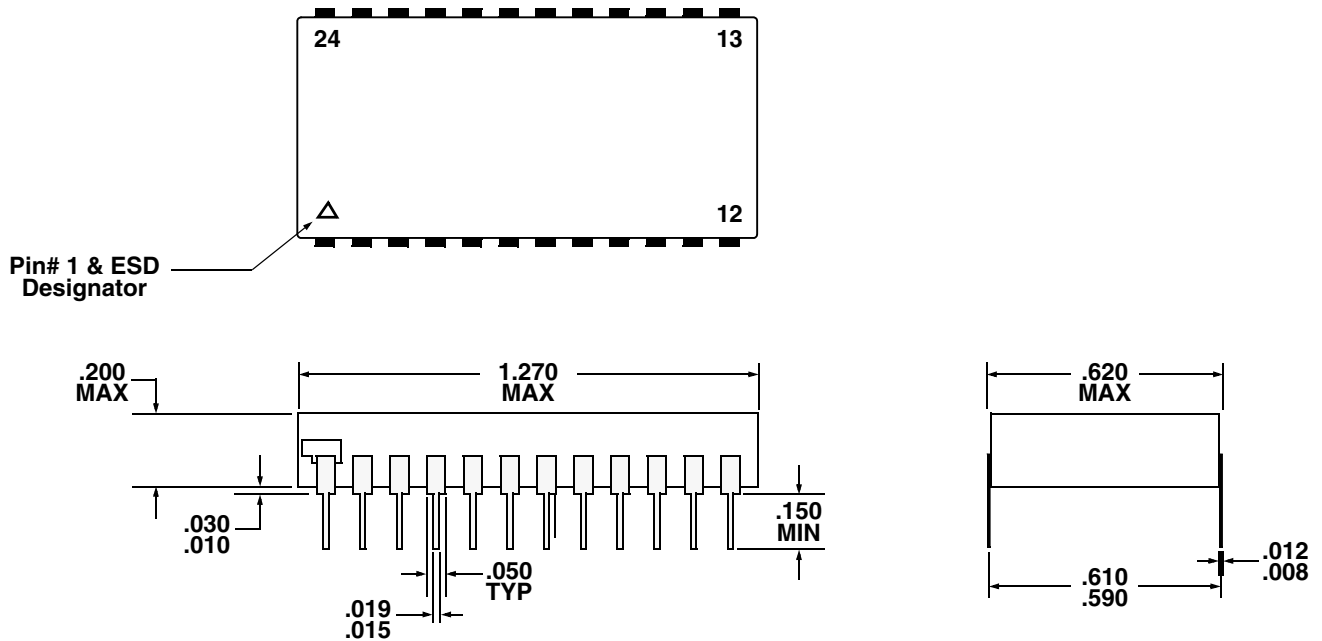

All dimensions in inches

**PLAINVIEW, NEW YORK**  
 Toll Free: 800-THE-1553  
 Fax: 516-694-6715

**INTERNATIONAL**  
 Tel: 805-778-9229  
 Fax: 805-778-1980

**NORTHEAST**  
 Tel: 603-888-3975  
 Fax: 603-888-4585

**SE AND MID-ATLANTIC**  
 Tel: 321-951-4164  
 Fax: 321-951-4254

**WEST COAST**  
 Tel: 949-362-2260  
 Fax: 949-362-2266

**CENTRAL**  
 Tel: 719-594-8017  
 Fax: 719-594-8468

*www.aeroflex.com info-ams@aeroflex.com*



Aeroflex Microelectronic Solutions reserves the right to change at any time without notice the specifications, design, function, or form of its products described herein. All parameters must be validated for each customer's application by engineering. No liability is assumed as a result of use of this product. No patent licenses are implied.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused