
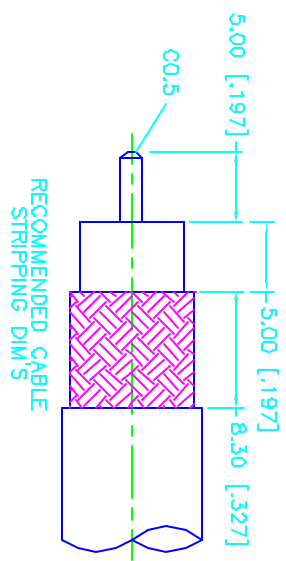



REV.	DATE	DESCRIPTION
NC	01/22/00	INITIAL RELEASE

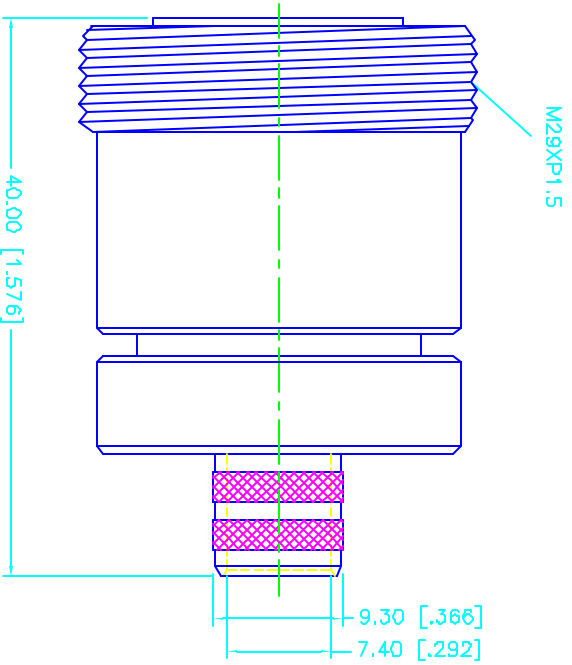

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. SILVER PL. 200 MIN. THICK OVER COPPER STRIKE
 2. BRASS PER DD-B-62B
 3. BERYLLIUM COPPER PER QQ-C-630.
 4. TEFLON MIL-P-19468

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS FOR CUSTOMER REFERENCE ONLY	APPROVALS	DATE	TITLE	SCALE	PART NO.	SHEET	
1 HOUSING	BRASS	SILVER	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	DRAWN	01/22/00	7/16 CRIMP JACK Connector Corporation (FOR LMR400, 9913 CABLE)	NA	272144	1 OF 1	
2 BODY	BRASS	SILVER		CHECKED	G.R.S.					
3 INSULATOR	TEFLON	NATURAL		ISSUED						
4 CONTACT PIN	BER. COPPER	SILVER								
5 FERRULE	COPPER	SILVER								
6 COVER	PE	BLUE								
7										
8				DO NOT SCALE DRAWING						