

DN74LS107

N74LS107

Dual J-K Flip-Flops (with Reset)




Description

DN74LS107 contains two negative-edge triggered J-K flip-flop circuits, each with independent clock-CP, J, K, and direct-coupled reset input terminals.

Features

- Negative-edge trigger
- Independent input and output terminals for each flip-flop
- Direct-coupled reset inputs
- Q and \bar{Q} outputs
- Wide operating temperature range ($T_a = -20$ to $+75^\circ\text{C}$)

Timing definition

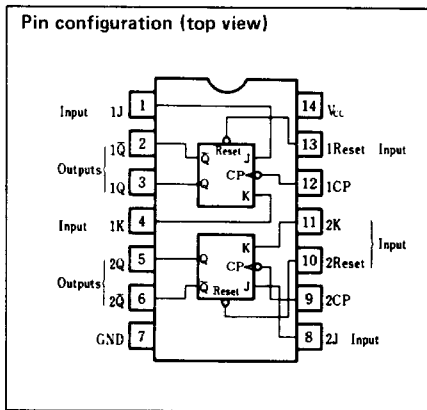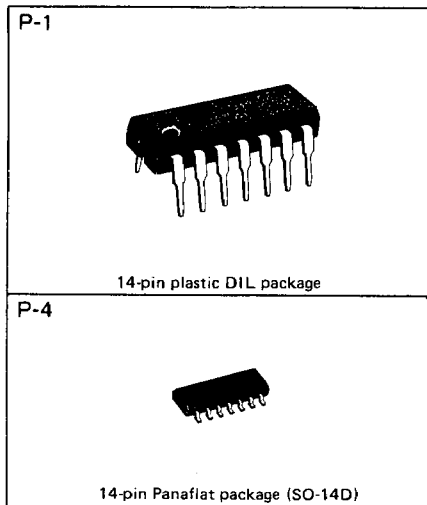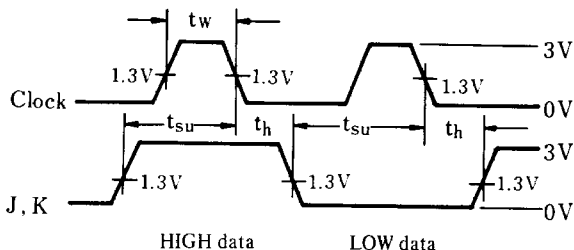

Recommended operating conditions

Parameter	Sym	Min	Typ	Max	Unit
Supply voltage	V_{CC}	4.75	5.00	5.25	V
Output current	I_{OH}			-400	μA
	I_{OL}			8	mA
Operating temperature range	T_{opr}	-20	25	75	$^\circ\text{C}$
Clock frequency	f_{clock}	0		30	MHz
Pulse width	Clock High	t_w	20		ns
	Reset Low		25		ns
Set-up time	HIGH data	t_{su}	20 ↓		ns
	LOW data		20 ↓		ns
Hold time	t_h	0 ↓			ns

Notes 1. ↓: Indicates fall edge of standard clock pulse.

■ DC characteristics (Ta = -20 ~ +75°C)

17R

Parameter	Sym	Test conditions	Min	Typ*	Max	Unit
Input voltage	V _{IH}		2.0			V
	V _{IL}				0.8	V
Output voltage	V _{OH}	V _{CC} = 4.75V, V _{IH} = 2V V _{IL} = 0.8V, I _{OH} = -400 μA	2.7	3.4		V
	V _{OL1}	V _{CC} = 4.75V V _{IH} = 2V		0.25	0.4	V
	V _{OL2}	V _{IL} = 0.8V		0.35	0.5	V
Input current	J-K	I _{IH}	V _{CC} = 5.25V V _I = 2.7V		20	μA
	Reset				60	μA
	Clock				80	μA
	J-K	I _{IL}	V _{CC} = 5.25V V _I = 0.4V		-0.4	mA
	Reset				-0.8	mA
	Clock				-0.8	mA
	J-K	I _I	V _{CC} = 5.25V V _I = 7V		0.1	mA
	Reset				0.3	mA
	Clock				0.4	mA
Output short circuit current**	I _{OS}	V _{CC} = 5.25 V _O = 0V	-15		-100	mA
Input clamp voltage	V _{IK}	V _{CC} = 4.75V I _I = -1.8mA			-1.5	V
Supply current***	I _{CC}	V _{CC} = 5.25V		4.0	8.0	mA

* When constant at V_{CC} = 5V, Ta = 25°C.

** Only one output at a time short circuited to GND. Also, short circuit time to GND within 1 second.

*** Measured with all outputs open, Q and Q̄ outputs alternately HIGH, and clock inputs grounded.

■ Switching characteristics (V_{CC} = 5V, Ta = 25°C)


3R

Parameter	Sym	Inputs	Outputs	Test conditions	Min	Typ	Max	Unit
Maximum clock frequency	f _{max}			C _L = 15pF R _L = 2kΩ	30	45		MHz
Propagation delay time	t _{PLH}	Reset Clock	Q, Q̄				11	20
	t _{PHL}					15	30	ns


※ Switching parameter measurement information

(1) f_{max}, t_{PLH}, t_{PHL} (Clock → Q, Q̄)

1. Measurement circuit

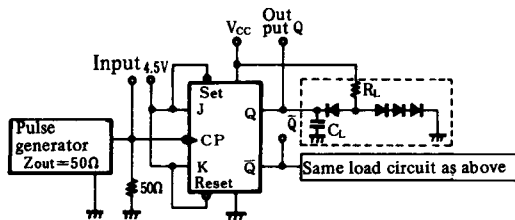

2. Waveforms

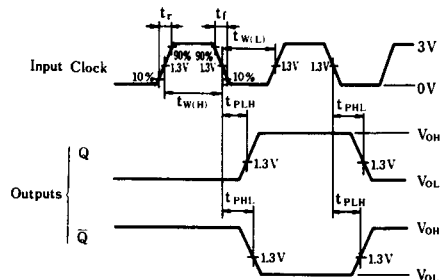


Notes

1. Clock input waveform: t_r ≤ 15ns, t_f ≤ 6ns, PRR = 1MHz, duty cycle = 50%.
2. When measuring f_{max}, t_r and t_f ≤ 2.5ns.


[2] $t_{PHL}(Reset \rightarrow Q)$, $t_{PLH}(Set \rightarrow \bar{Q})$

1. Measurement circuit

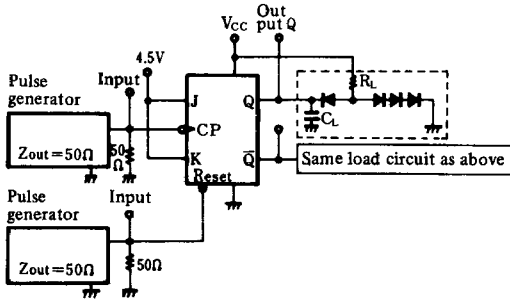

1. Measurement made for each flip flop.
2. C_L includes probe and tool floating capacitance.
3. Diodes are all MA161.

2. Waveforms

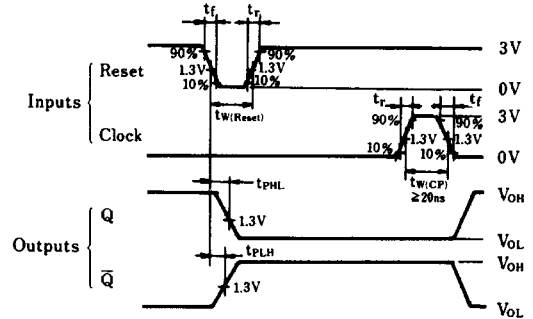

Notes

1. Input waveform: $t_r \leq 15ns$, $t_f \leq 6ns$, $PRR = 1MHz$, duty cycle = 50%.

■ Truth tables

Inputs				Outputs	
Reset	Clock	J	K	Q	\bar{Q}
L	X	X	X	L	H
H	↓	L	L	Q_0	\bar{Q}_0
H	↓	H	L	H	L
H	↓	L	H	L	H
H	↓	H	H	Toggle	
H	H	X	X	Q_0	\bar{Q}_0

Notes

1. H: HIGH voltage level.
2. L: LOW voltage level.
3. ↓: Change from HIGH to LOW.
4. X: Either HIGH or LOW; doesn't matter.
5. Q_0 : Q level prior to determination of input condition shown in table.
6. \bar{Q}_0 : \bar{Q} level prior to determination of input condition shown in table.
7. Toggle: With ↓ change, outputs become compliment of previous condition.

■ Logic diagram (1/2)

