


## Product Bulletin

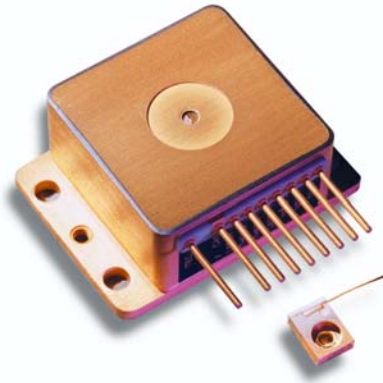

The SDL-2400 series laser diodes represent a breakthrough in high continuous wave (CW) optical power and ultra-high brightness with unsurpassed reliability. The small emitting aperture, combined with low beam divergence, makes the SDL-2400 series the highest-brightness family of CW laser diodes available in the industry today.

The SDL-2400 series consists of partially coherent broad area emitters with relatively uniform emission over the emitting aperture. Operation is multi-longitudinal mode with a spectral envelope width of approximately 2 nm FWHM. The far field beam divergence in the plane perpendicular to the P/N junction is nearly Gaussian, while the lateral beam profile exhibits a multiple-transverse mode pattern typical of broad area emitters. SDL-2400 variants range from 2 W output from a 100  $\mu\text{m}$  aperture to 3 W from a 200  $\mu\text{m}$  aperture with superlative reliability.

The high efficiency of the quantum well structure, combined with low thermal resistance epi-down chip mounting, provides minimum junction temperature at high optical power. Low junction temperature and low thermal resistance packages extend lifetime and increase reliability.

Convenient package options such as open heatsink and window packages allow easy integration into user systems.

### 2.0 & 3.0 W, 798 to 800/808 to 812 nm High-brightness Laser Diodes SDL-2400 Series

#### Key Features

- 2 and 3 W CW power
- 100 and 200  $\mu\text{m}$  apertures
- High-efficiency MOCVD quantum well design
- TEC option for wavelength control
- Open heatsink and window packages
- High reliability

#### Applications

- Solid-state laser pumping
- Medical/ophthalmic
- Free-space communication
- Beacons/illumination

**SDL-2460 Series**

SDL-2460-A

SDL-2462-P1

**Electro-optical Performance**

Laser Characteristics	Symbol	Min.	Typ.	Max.	Unit
CW output power	$P_o$	–	–	2	W
Center wavelength	$\lambda_c$	798 ( $\pm 3$ ) 808 ( $\pm 3$ )	–	800 ( $\pm 3$ ) 812 ( $\pm 3$ )	nm nm
Spectral width	$\Delta\lambda$	–	2	–	nm
Slope efficiency	$\eta_D = P_o / (I_{op} - I_{th})$	0.75	0.95	–	
Conversion efficiency	$\eta = P_o / (I_{op} V_{op})$	–	35	–	%
Emitting dimensions	W x H	–	100 x 1	–	$\mu\text{m}$
FWHM beam divergence					
Parallel to junction	$\theta_{//}$	–	12	–	degrees
Perpendicular to junction	$\theta_{\perp}$	–	32	–	degrees
Threshold current	$I_{th}$	–	0.4	0.6	A
Operating current	$I_{op}$	–	2.5	3.0	A
Operating voltage	$V_{op}$	–	(note <sup>5</sup> )	–	
Series resistance	$R_s$	–	0.25	0.50	$\Omega$
Thermal resistance	$R_{th}$	–	12	–	$^{\circ}\text{C}/\text{W}$
Recommended case temperature	$T_c$	-20	–	30	$^{\circ}\text{C}$
<b>Absolute Maximum Ratings</b>					
Reverse voltage	$V_{rl}$	–	–	3	V
Case operating temperature	$T_{op}$	-20	–	50	$^{\circ}\text{C}$
Storage temperature range	$T_{stg}$	-40	–	80	$^{\circ}\text{C}$
Lead soldering temperature	$T_{is}$	–	–	250	$^{\circ}\text{C}$ (5 sec.)
<b>Monitor Photodiode<sup>1</sup></b>					
Sensitivity	–	0.1	–	10.0	$\mu\text{A}/\text{mW}$
Capacitance	–	–	6	–	pF
Breakdown voltage	$V_{bd}$	–	25	–	V
Operating voltage	$V_{op}$	–	10	–	V
<b>Thermoelectric Cooler<sup>1</sup></b>					
Drive current	$I_{TE}$	–	3.5	–	
Drive voltage	$V_{TE}$	–	8	–	V
Thermistor resistance	$R_{therm}$	–	10	–	k $\Omega$

- Not available on A package.
- All values at 25  $^{\circ}\text{C}$  and 0.6 NA collection optics.
- Features common to these products include:
  - Duty factor of 100%.
  - Rise and fall times of 500 ps (A package).
  - Temperature coefficient of wavelength is approximately 0.27 to 0.3 nm/ $^{\circ}\text{C}$ .
  - Temperature coefficient of threshold current can be modeled as:  

$$I_{TH2} = I_{TH1} \exp [(T_2 - T_1)/T_0]$$
 where  $T_0$  is a device constant of  $\sim 160$   $^{\circ}\text{K}$ .
  - Temperature coefficient of operating current is approximately 1% per  $^{\circ}\text{C}$ .
- Modulation bandwidth of CW laser diodes is approximately 1 GHz for A package diodes.  
 P package diodes roll off at slightly lower frequencies due to inductance of pins and internal leads.
- Forward voltage is typically:  $V_f = 1.5 \text{ V} + I_{op} \times R_s$ .

**SDL-2400 Series**  
**Laser Diodes | 3**

**SDL-2470 Series**

SDL-2470-A

SDL-2472-P1

**Electro-optical Performance**


Laser Characteristics	Symbol	Min.	Typ.	Max.	Unit
CW output power	$P_o$	–	–	3	W
Center wavelength	$\lambda_c$	798 ( $\pm 3$ )	–	800 ( $\pm 3$ )	nm
		808 ( $\pm 3$ )	–	812 ( $\pm 3$ )	nm
Spectral width	$\Delta\lambda$	–	2	–	nm
Slope efficiency	$\eta_D = P_o / (I_{op} - I_{th})$	0.75	0.95	–	W/A
Conversion efficiency	$\eta = P_o / (I_{op} V_{op})$	–	35	–	%
Emitting dimensions	W x H	–	200 x 1	–	$\mu\text{m}$
FWHM beam divergence					
Parallel to junction	$\theta_{//}$	–	12	–	degrees
Perpendicular to junction	$\theta_{\perp}$	–	32	–	degrees
Threshold current	$I_{th}$	–	0.9	1.2	A
Operating current	$I_{op}$	–	4.0	4.8	A
Operating voltage	$V_{op}$	–	(note <sup>5</sup> )	–	
Series resistance	$R_s$	–	0.12	0.25	$\Omega$
Thermal resistance	$R_{th}$	–	10	–	$^{\circ}\text{C}/\text{W}$
Recommended case temperature	$T_c$	-20	–	30	$^{\circ}\text{C}$
<b>Absolute Maximum Ratings</b>					
Reverse voltage	$V_{rl}$	–	–	3	V
Case operating temperature	$T_{op}$	-20	–	50	$^{\circ}\text{C}$
Storage temperature range	$T_{stg}$	-40	–	80	$^{\circ}\text{C}$
Lead soldering temperature	$T_{is}$	–	–	250	$^{\circ}\text{C}$ (5 sec.)
<b>Monitor Photodiode<sup>1</sup></b>					
Sensitivity	–	0.1	–	10.0	$\mu\text{A}/\text{mW}$
Capacitance	–	–	6	–	pF
Breakdown voltage	$V_{bd}$	–	25	–	V
Operating voltage	$V_{op}$	–	10	–	V
<b>Thermoelectric Cooler<sup>1</sup></b>					
Drive current	$I_{TE}$	–	3.5	–	A
Drive voltage	$V_{TE}$	–	8	–	V
Thermistor resistance	$R_{therm}$	–	10	–	$\text{k}\Omega$

1. Not available on A package.
2. All values at 25  $^{\circ}\text{C}$  and 0.6 NA collection optics.
3. Features common to these products include:
  - a. Duty factor of 100%.
  - b. Rise and fall times of 500 ps (A package).
  - c. Temperature coefficient of wavelength is approximately 0.27 to 0.3 nm/ $^{\circ}\text{C}$ .
  - d. Temperature coefficient of threshold current can be modeled as:  


$$I_{TH2} = I_{TH1} \exp [(T_2 - T_1)/T_0]$$
 where  $T_0$  is a device constant of  $\sim 160$   $^{\circ}\text{K}$ .
  - e. Temperature coefficient of operating current is approximately 1% per  $^{\circ}\text{C}$ .
4. Modulation bandwidth of CW laser diodes is approximately 1 GHz for A package diodes.  
 P package diodes roll off at slightly lower frequencies due to inductance of pins and internal leads.
5. Forward voltage is typically:  $V_f = 1.5 \text{ V} + I_{op} \times R_s$ .

**Typical Optical Characteristics**


SDL-2460  
Light vs. Current

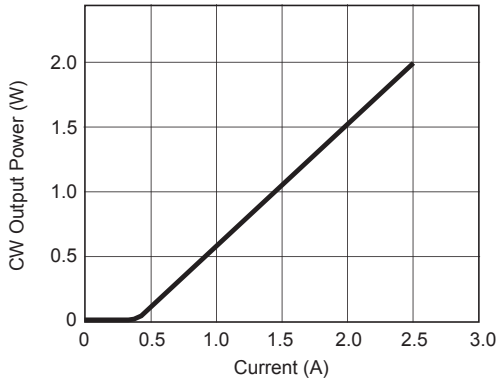


SDL-2470  
Light vs. Current

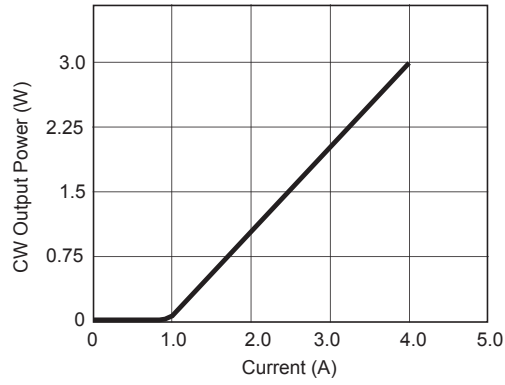


Far Field Energy  
Distribution (A, P1)

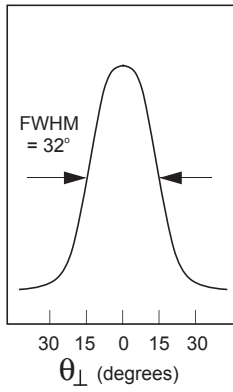

Far Field Energy  
Distribution (A, P1)

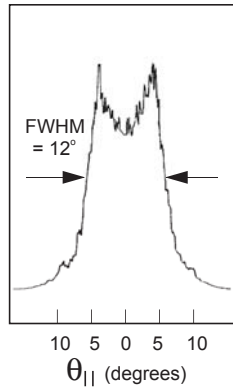

Typical Emission  
Spectrum

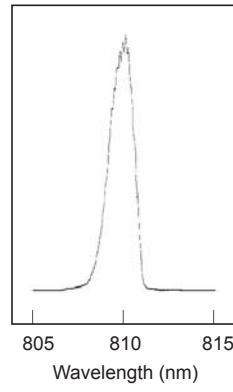


**SDL-2400 Series**  
**Laser Diodes | 5**

**Package Dimensions (inches [mm])**



Standard Tolerances

inches: x.xx = ±0.02      mm: x.x = ±0.5  
 x.xxx = ±0.010          x.xx = ±0.25

**A**  
**Open Heatsink**  
**Package**

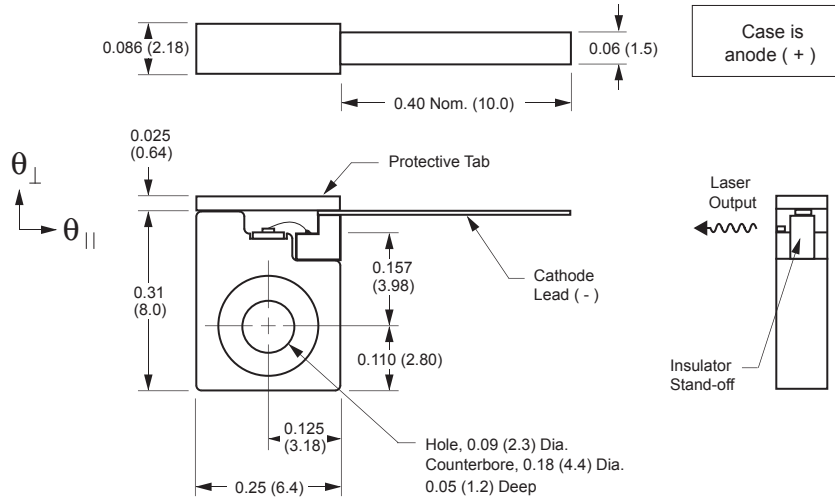

**P1**  
**High Heat Load**  
**Window Package**

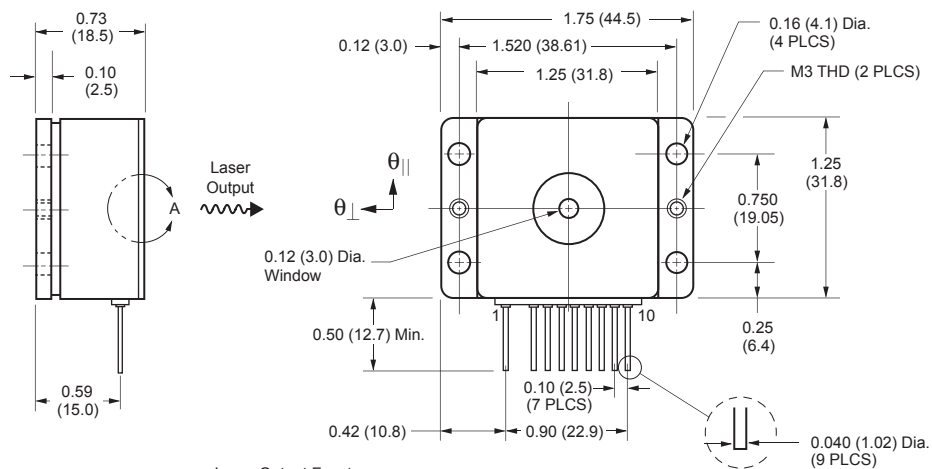

Pin	
1.	TEC (-)
2.	-
3.	Case
4.	Laser anode (+)
5.	Thermistor (2)
6.	Thermistor (1)
7.	Laser cathode (-)
8.	Monitor photodiode anode
9.	Monitor photodiode cathode
10.	TEC (+)

## User Safety

### Safety and Operating Considerations

The laser light emitted from this laser diode is invisible and may be harmful to the human eye. Avoid looking directly into the laser diode, into the collimated beam along its optical axis, or directly into the fiber when the device is in operation.

**CAUTION: THE USE OF OPTICAL INSTRUMENTS WITH THIS PRODUCT WILL INCREASE EYE HAZARD.**

Operating the laser diode outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with the component must be employed such that the maximum peak optical power cannot be exceeded.

CW laser diodes may be damaged by excessive drive current or switching transients. When power supplies are used, the laser diode should be connected with the main power on and the output voltage at zero. The current should be increased slowly while the laser diode output power and the drive current are monitored.

Device degradation accelerates with increased temperature, and therefore careful attention to minimize the case temperature is advised. For example, life expectancy will decrease by a factor of four if the case is operated at 50 °C rather than 30 °C.

A proper heatsink for the laser diode on a thermal radiator will greatly enhance laser life. Firmly mount the laser on a radiator with a thermal impedance of less than 0.5 °C/W for increased reliability.

## Ordering Information


For more information on this or other products and their availability, please contact your local JDS Uniphase account manager or JDS Uniphase directly at 1-800-254-3684 in North America and +800-5378-JDSU worldwide or via e-mail at sales@jdsu.com.

ESD PROTECTION – Electrostatic discharge is the primary cause of unexpected laser diode failure. Take extreme precaution to prevent ESD. Use wrist straps, grounded work surfaces and rigorous antistatic techniques when handling laser diodes.

## 21 CFR 1040.10 Compliance

Because of the small size of these devices, each of the labels shown is attached to the individual shipping container. They are illustrated here to comply with 21 CFR 1040.10 as applicable under the Radiation Control for Health and Safety Act of 1968.


### Serial Number Identification Label

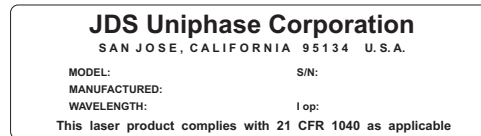

### Output Power Danger Labels



### Package Aperture Labels

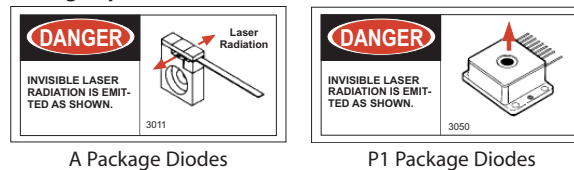

North America toll-free: 1-800-254-3684  
Worldwide toll-free: +800-5378-JDSU  
www.jdsu.com

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. JDS Uniphase reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDS Uniphase makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDS Uniphase for more information. JDS Uniphase and the JDS Uniphase logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. Copyright JDS Uniphase Corporation. All rights reserved.