



5	DIELECTRIC	TEFLON	NONE	1
4	DIELECTRIC	TEFLON	NONE	1
3	PIN	BRASS	GOLD	1
2	BODY	BRASS	NICKEL	1
1	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

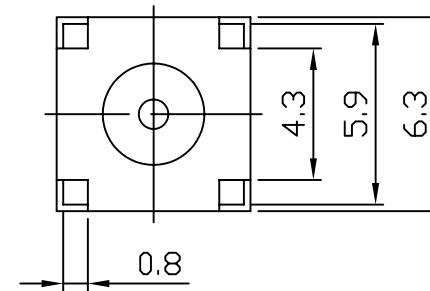

ELECTRICAL

IMPEDANCE		50 OHM	
FREQUENCY		0-4 GHz	
VSWR*fin GHz	CABLE DIELECTRIC DIMENSIONS	0.87mm	1.5mm
	STRAIGHT CONNECTOR DC-1000 MHz	1.3+0.04f	1.25+0.04f
	RIGHT ANGLE CONNECTOR DC-1000 MHz	1.4+0.08f	1.3+0.04f
DIELECTRIC WITHSTANDING VOLTAGE 50 Hz RMS		750V	1000V
WORKING VOLTAGE 50 Hz RMS		250V	335V
WORKING VOLTAGE DC		350V	450V
INSULATION RESISTANCE		1000 MEGOHMS MIN	
CONTACT RESISTANCE	INNER CONDUCTOR	≤3 MILIOHMS	
	OUTER CONDUCTOR	≤0.5 MILIOHMS	
INSERTION LOSS (dB MAX.)	STRAIGHT CONNECTORS	.15 dB MAX. AT 1.0GHz	
	RIGHT ANGLE CONNECTORS	.30 dB MAX. AT 1.0GHz	

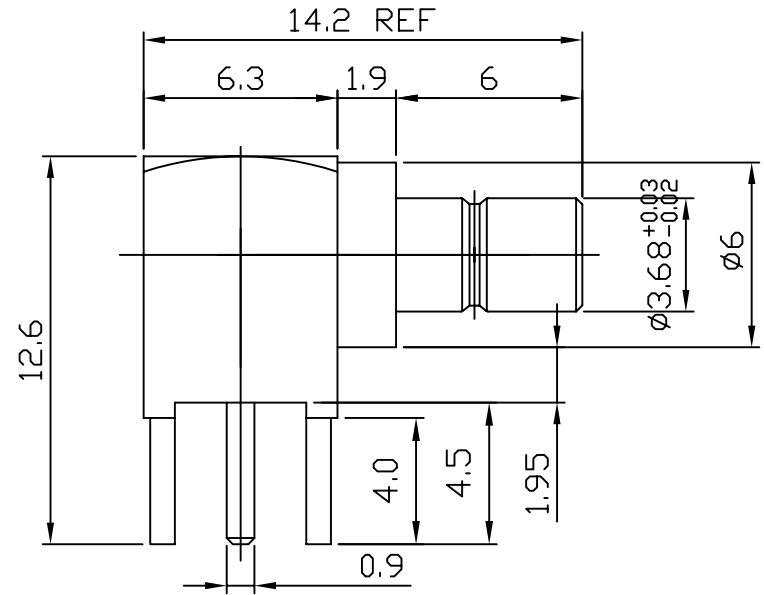

PART NO. SMB-JR-50

DWG NO. SMB-JR-50

CHECKED BY CY

FILE NO.

DRAWING BY

UNIT / mm

SCALE 1:1

PROJECTION

UNLESS OTHERWISE SPECIFIED TOLERANCES	
0.5-5	±0.2
5-30	±0.4
30-120	±0.6
120-315	±1
315-1000	±1.6
1000-2000	±2.4

DESCRIPTION:	RIGHT ANGLE SMB FEMALE PCB MOUNT			
	AREA	REVISIONS	HK	DATE

焜倫有限公司