



Smart Power High-Side Switch

PRODUCT SUMMARY			
Overvoltage Protection $V_{bb(AZ)}$ (V)	Operating Voltage $V_{bb(on)}$ (V)	On-State Resistance R_{ON} (m Ω)	Nominal Load Current $I_{L(nom)}$ (A)
41	5 - 15	50	2.0

FEATURES

- Overload Protection
- Current Limitation
- Short Circuit Protection
- Thermal Shutdown with Restart
- Overvoltage Protection (Including Load Dump)
- Reverse Battery Protection with External Resistor
- CMOS Compatible Input

- Start A Cold Filament Lamp
- ESD Protection
- Low Standby Current


APPLICATIONS


- All Types of Resistive, Inductive and Capacitive Loads
- μ C Compatible Power Switch for 12-V dc Applications
- Replaces Electromechanical Relays and Discrete Circuits

DESCRIPTION

The Si4750DY is an n-channel vertical power FET with charge pump, ground referenced CMOS compatible input, and fully protected by embedded protection functions.

FUNCTIONAL BLOCK DIAGRAM

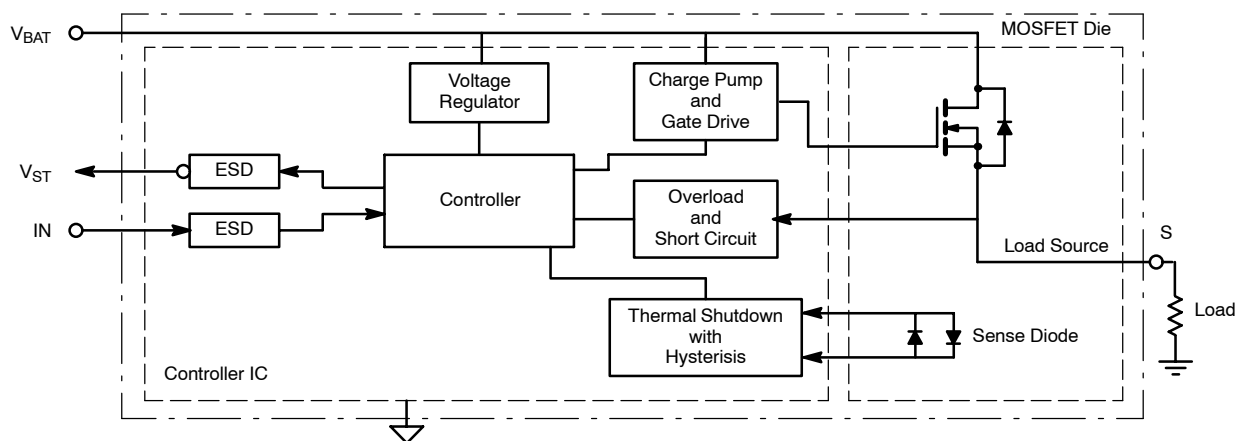

PIN CONFIGURATION


Ordering Information: Si4750DY—E3
Si4750DY-T1—E3 (with Tape and Reel)

TRUTH TABLE

IN	MOSFET
H	ON
L	OFF

PIN DESCRIPTION

Pin Number	Symbol	Description
1	IN	Input Logic Signal
2, 3, 4	V_{BAT}	V_{BAT} /MOSFET Drain, Bypass Cap is Mandatory
5, 6	S	MOSFET Source
7	GND	Ground
8	V_{ST}	Status Output Pin

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter	Symbol	Limit	Unit	
Supply Voltage	V_{bb}	15	V	
Supply Voltage For Full Short Circuit Protection ($T_A = -40$ to 150°C)	$V_{bb(SC)}$	15		
Continuous Input Voltage	V_{IN}	-0.7 to 7.5		
Load Current (Short Circuit Current—see page 3)	I_L	Self-Limit	A	
Current Through Input Pin (dc)	I_{IN}	± 1	mA	
Operating Temperature	T_A	-40 to 150	$^\circ\text{C}$	
Storage Temperature	T_{stg}	-55 to 150		
Power Dissipation ^a	P_{tot}	1.14	W	
Inductive Load Switch-Off Energy Dissipation Single Pluse ($T_A = 25^\circ\text{C}$)	E_{AS}	20	mJ	
Load Dump Protection ^{b, c} ($t_d = 15 \mu\text{s}$, V_{IN} = low or high, $V_{bb} = 14.5 \text{ V}$)	$V_{LOADDUMP}$	25	V	
Electrostatic Discharge Voltage (Human Body Model) ^d	Input Pin	V_{ESD}	± 1.2	kV
	All Other Pins		± 5	

THERMAL RESISTANCE RATINGS

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Junction-to-Ambient	R_{thJA}		88	110	$^\circ\text{C/W}$
Junction-to-Case (Drain) ^a	R_{thJC}		29	36	

Notes

- When Mounted on 1" x 1" PCB FR4 Board.
- Not tested, specified by design.
- $V_{LOADDUMP}$ is setup without the DUT connected to the generator per ISO 7637-1 and DIN 40839. Supply voltages higher than $V_{bb(AZ)}$ require an external current limit for the GND pin, e.g. with a 150- Ω resistor in GND connection. A resistor for the protection of the input is integrated.
- According to ANSI EOS/ESD-S5.1-1983 ESD STM5.1-1998.



SPECIFICATIONS						
Parameter	Symbol	Test Conditions Unless Otherwise Noted $T_A = 25^\circ\text{C}$, $V_{bb} = 14.5\text{ V}$	Min	Typ	Max	Unit
Load Switching Capabilities and Characteristics						
On-State Resistance	r_{ON}	$I_L = 2\text{ A}$, $V_{bb} = 9\text{ to }14.5\text{ V}$		34	50	m Ω
Nominal Load Current	$I_{L(nom)}$			2		A
Turn-On- Time to 90% V_{OUT}	t_{ON}	$I_L = 2\text{ A}$, $C_L = 2\ \mu\text{A}$		70	150	μs
Turn-Off Time to 10% V_{OUT}	t_{off}			60	150	
Slew Rate On	dV/dt_{on}			0.22		V/ μs
Slew Rate Off	$-dV/dt_{on}$			0.08		
Operating Parameters						
Operating Voltage	$V_{bb(on)}$		9		41	V
Undervoltage Shutdown of Charge Pump	$V_{bb(under)}$	$T_A = -40\text{ to }85^\circ\text{C}$		6.7	8	
Undervoltage Restart of Charge Pump	$V_{bb(ucp)}$			7.1	8	
Standby Current	$I_{bb(off)}$	$T_A = -40\text{ to }85^\circ\text{C}$, $V_{IN} = 0\text{ V}$		70		μA
Leakage Output Current (Included in $I_{bb(off)}$)	$I_{L(off)}$	$V_{IN} = 0\text{ V}$			0.5	
Protection Features						
Initial Peak Short Circuit Current Limit	$I_{L(SCP)}$	$t_m = 500\ \mu\text{s}$, $T_A = 25^\circ\text{C}$		21		A
		$t_m = 500\ \mu\text{s}$, $T_A = 25^\circ\text{C}$		19		
Thermal Overload Trip Temperature	T_J	$I_L = 2\text{ A}$	150			$^\circ\text{C}$
Thermal Hysteresis	T_{HYS}			12		
Reverse Battery						
Reverse Battery ^b	$-V_{bb}$				25	V
Drain-Source Diode Voltage	$-V_{ON}$	$V_{OUT} > V_{bb}$, $T_J = 150^\circ\text{C}$		600		mV
Input						
Input Turn-On Threshold Voltage	$V_{IN(T+)}$	See Figure 1		2.3	3.0	V
Input Turn-Off Threshold Voltage	$V_{IN(T-)}$		0.8			
Input Threshold Hysteresis	$\Delta V_{IN(T)}$			1		
Off-State Input Current	$I_{IN(off)}$	$V_{IN} = 0.7\text{ V}$, See Figure 1			2	μA
On-State Input Current	$I_{IN(on)}$	$V_{IN} = 5\text{ V}$, See Figure 1			2	
Input Resistance	R_L	Input Resistance, See Figure 1		3000		k Ω







Notes

- Not to exceed $T_{PULSE} = 50\text{ ns}$.
- Requires a 150- Ω resistor in GND connection. The reverse load current through the intrinsic drain-source diode has to be limited by the connected load. Power dissipation is higher compared to normal operating conditions due to the voltage drop across the drain-source diode. The temperature protection is not active during reverse current operation. Input current has to be limited. (See Maximum Ratings, page 2.)

<http://www.campw.com/>




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

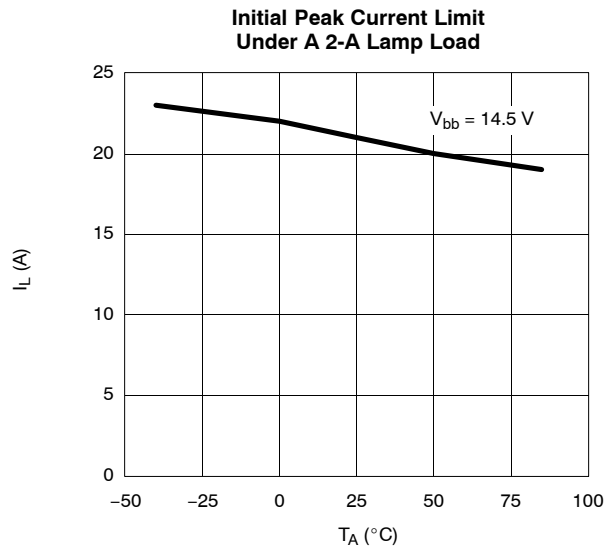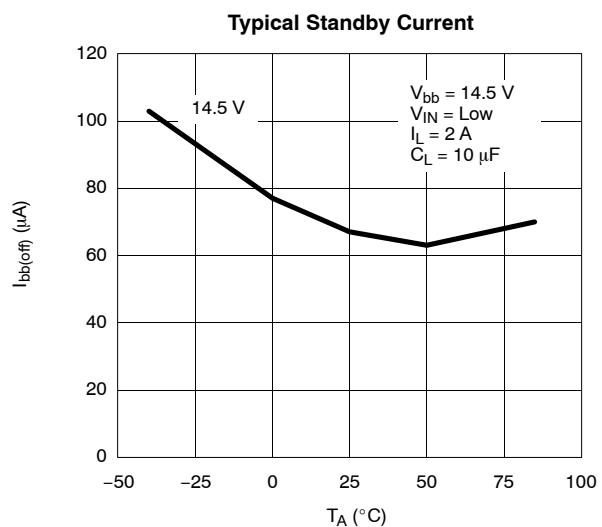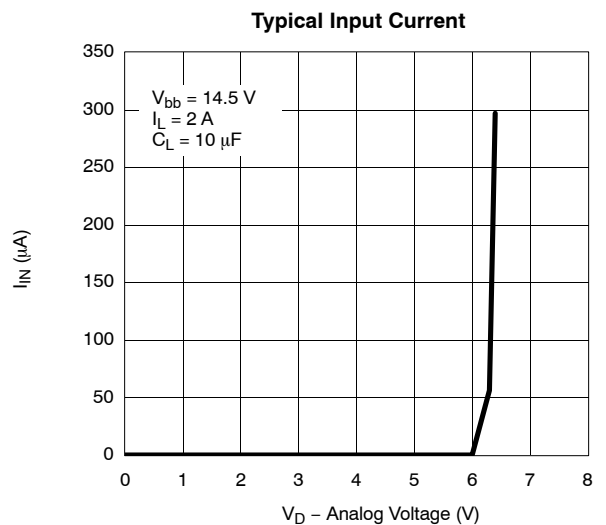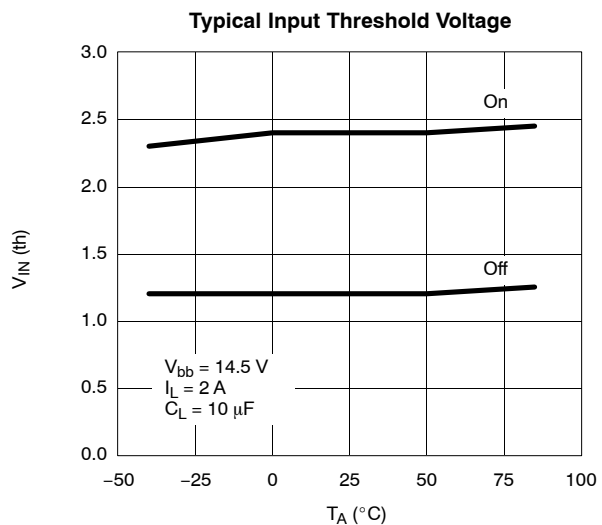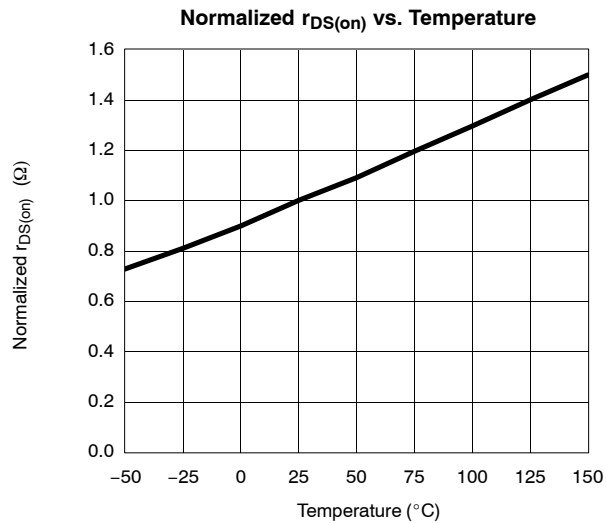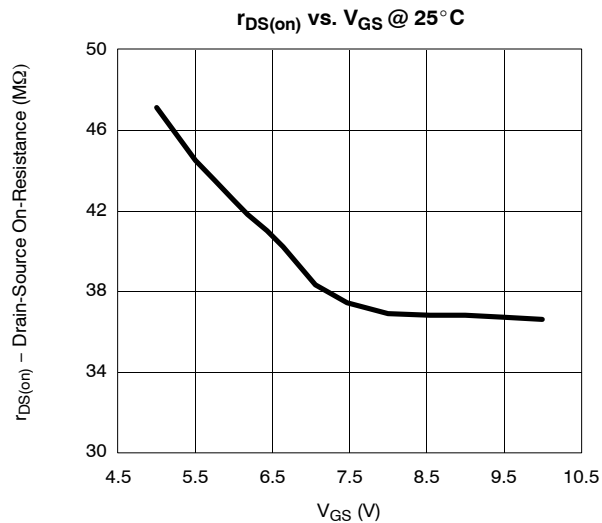




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


Initial Shutdown Time Under A 2-A Lamp Load

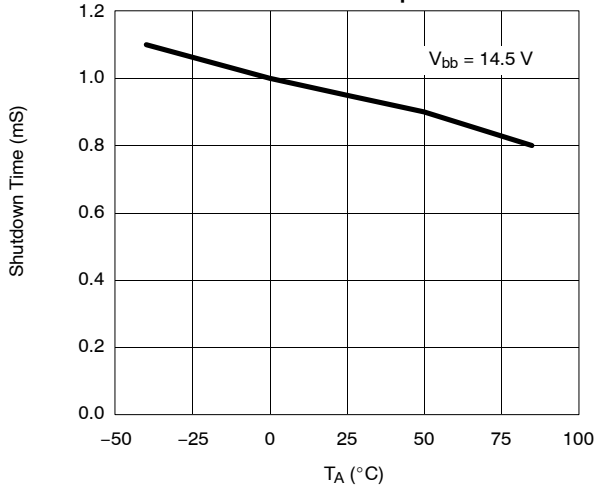


Maximum Allowable Load Inductance For A Single Switch Off

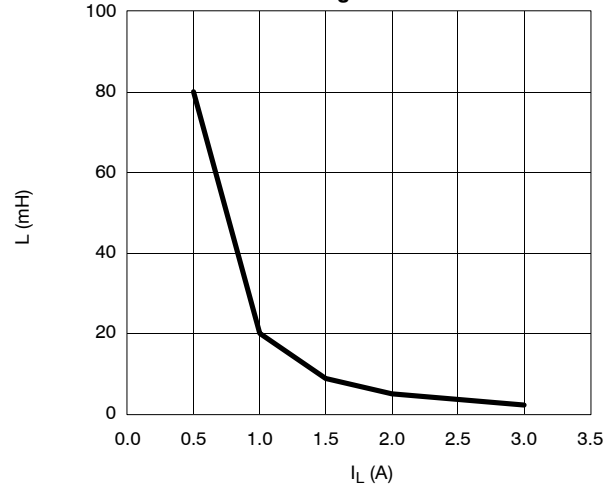


Maximum Inductive Switch Off Energy Single Pulse

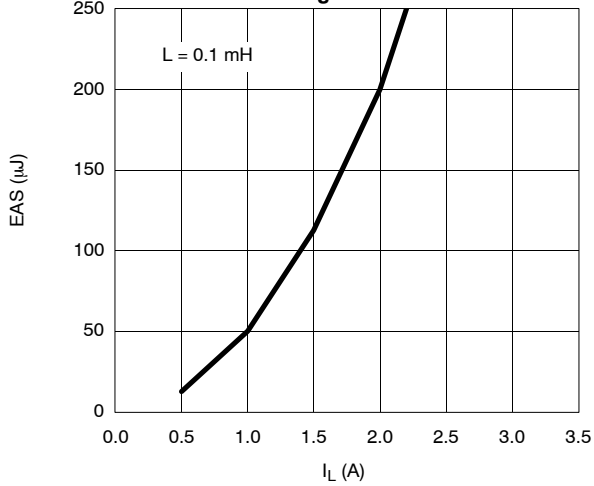


t_{off} vs. C_L

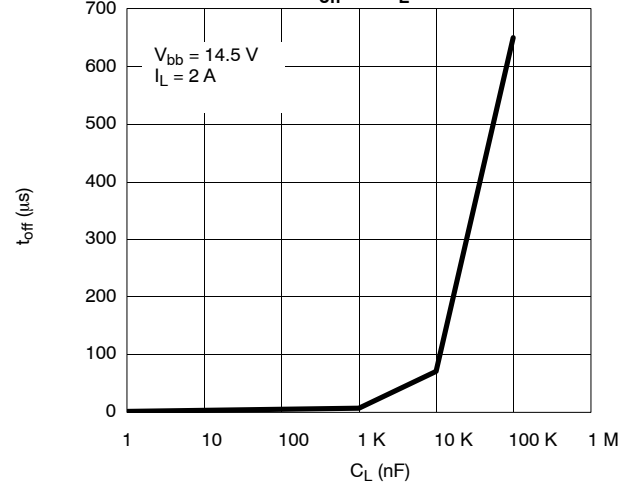



Typical Turn-On Time

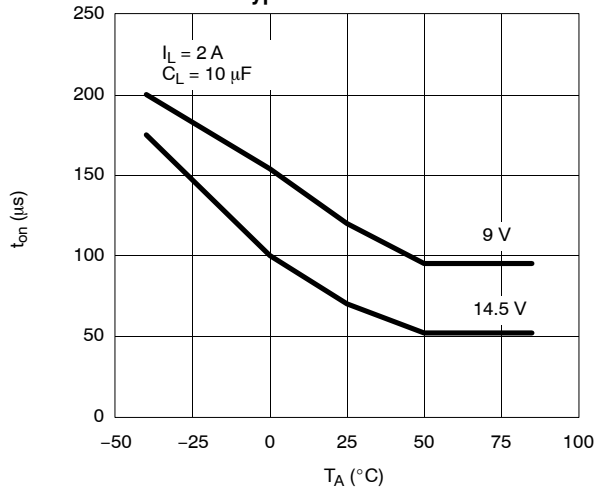

Typical Turn-Off Time

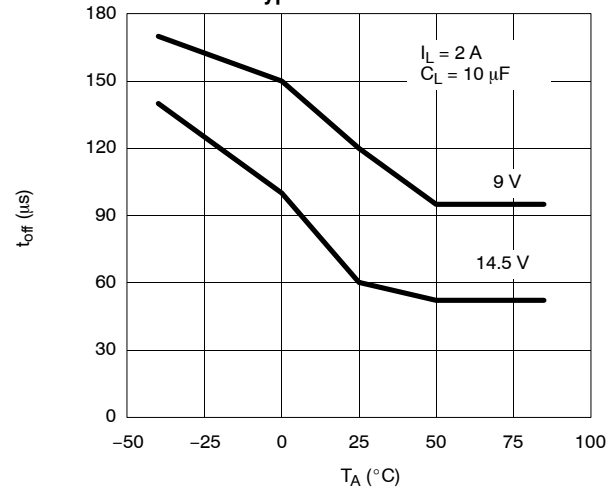

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

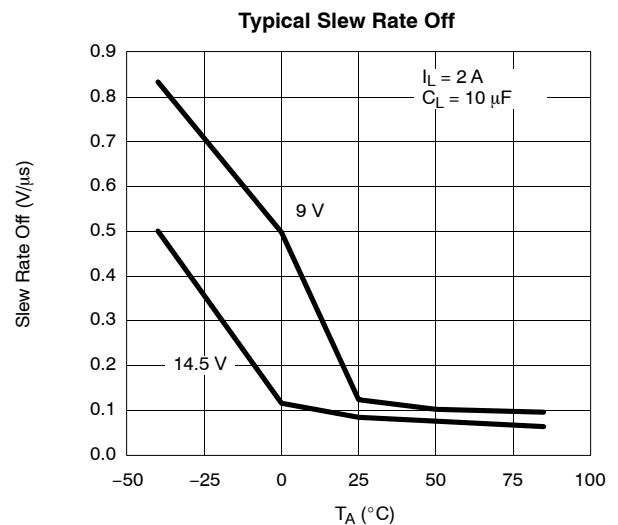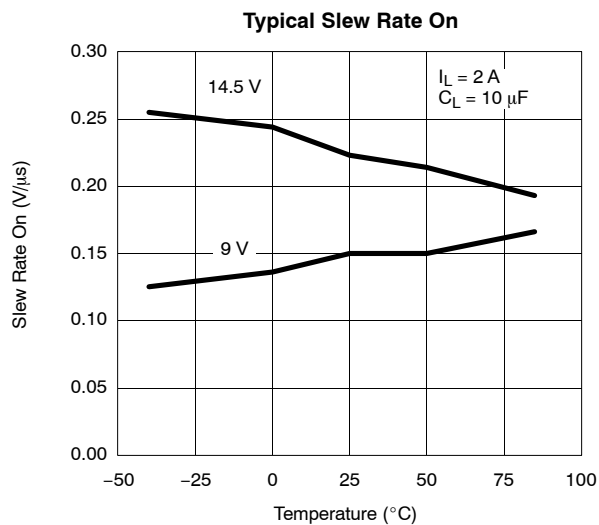

SETUP

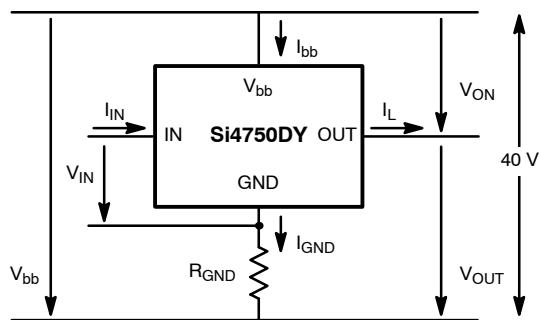


FIGURE 1.

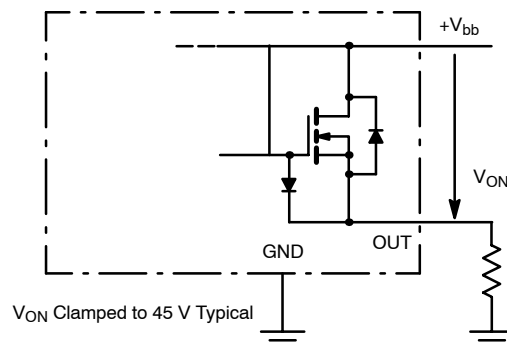


FIGURE 2. Inductive and Overvoltage Output Clamp

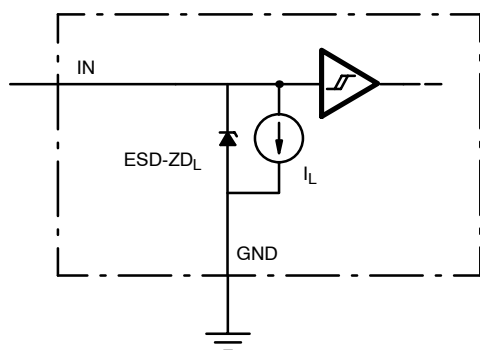


FIGURE 3. Input Circuit (ESD Protection)

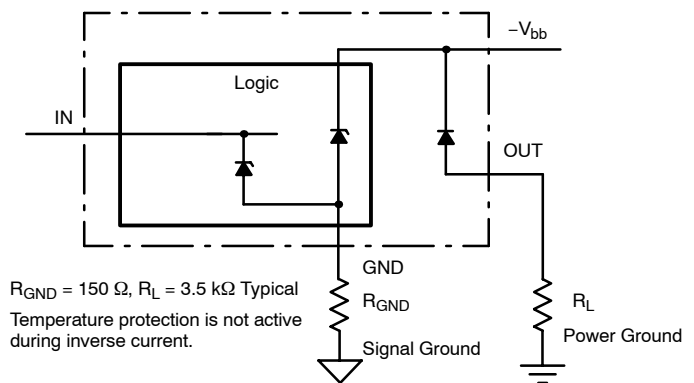


FIGURE 4. Reverse Pattern Protection

TIMING DIAGRAMS

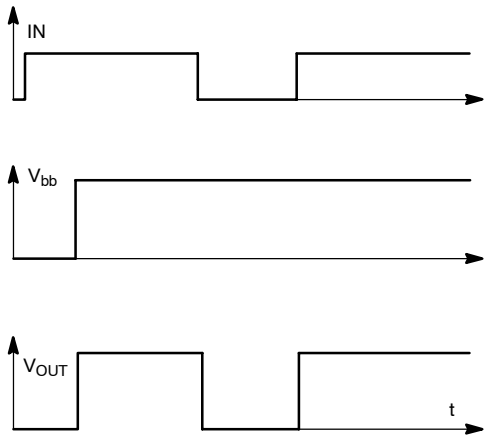


FIGURE 5. V_{bb} Turn-On

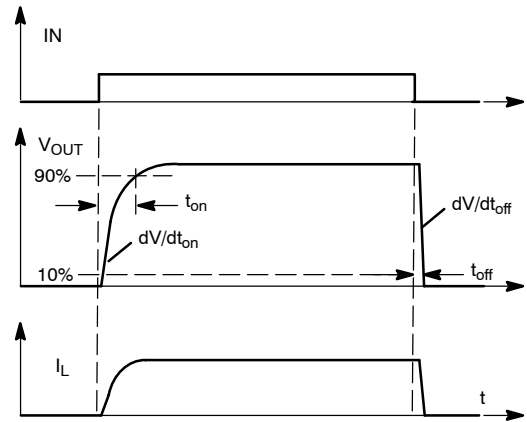


FIGURE 6. Switching A Resistive Load, Turn-on/Off Time and Slew Rate Definition

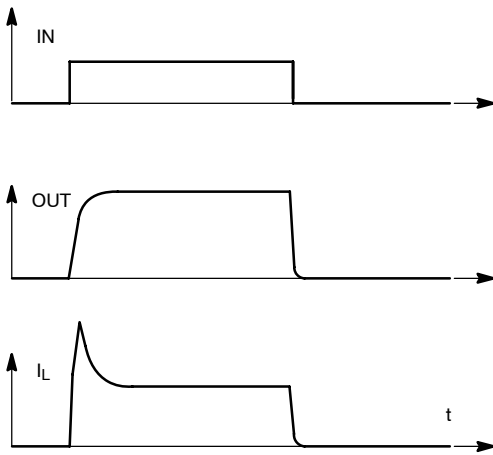


FIGURE 7. Switching A Lamp

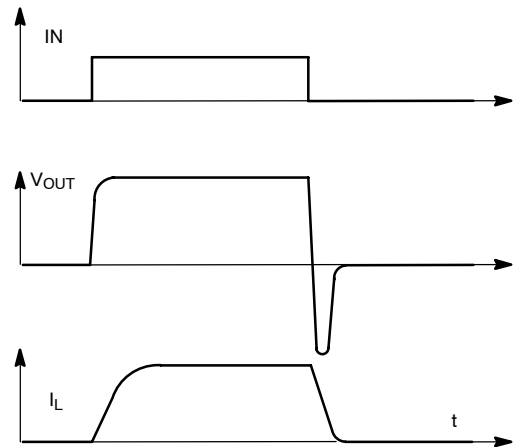


FIGURE 8. Switching An Inductive Load

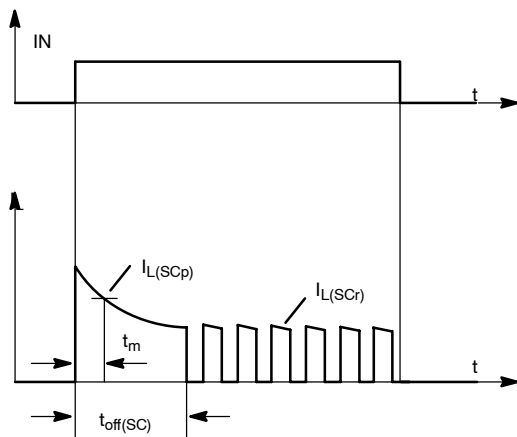


FIGURE 9. Turn-On Into Short Circuit Driving A Cold Filament

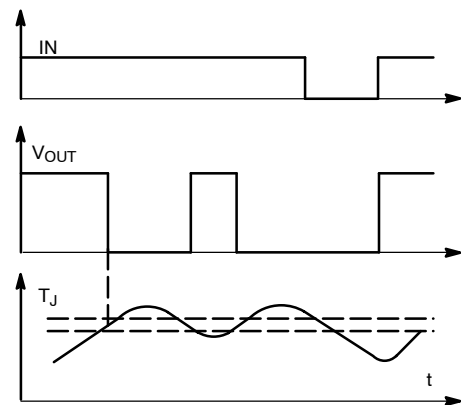


FIGURE 10. Overtemperature: Reset If $T_J < T_{JT}$



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.