

TOSHIBA PHOTOINTERRUPTER INFRARED LED + PHOTO IC

TLP1029

PRINTER, ELECTRONIC TYPEWRITER

COPYING MACHINE, FACSIMILE

TRACK BALL

VARIOUS POSITION DETECTION


TLP1029 is a digital output photointerrupter with a GaAs infrared LED and a high sensitive and high gain Si photo IC combined. This photointerrupter has a switching time shorter than the phototransistor output and is capable of high speed position detection.

Further because of large output current and a built-in Schmitt trigger circuit, this photointerrupter is connectable directly to a microcomputer or logic IC.

Its output becomes low level when the light is shielded.


- Printing wiring board direct mounting type
- Gap : 2mm
- High resolution : Slit width 0.5mm (LED side), 0.15mm (detector side)
- Digital output (open collector)
- Threshold input current : $I_{FHL} = 6\text{mA}$ (Max.) at $T_a = 25^\circ\text{C}$
- Supply voltage : $V_{CC} = 4.5 \sim 17\text{V}$
- Switching time : $t_{pLH} = 6\mu\text{s}$, $t_{pHL} = 3\mu\text{s}$ (Typ.)
- Detector side is of visible light cut type.

Unit in mm

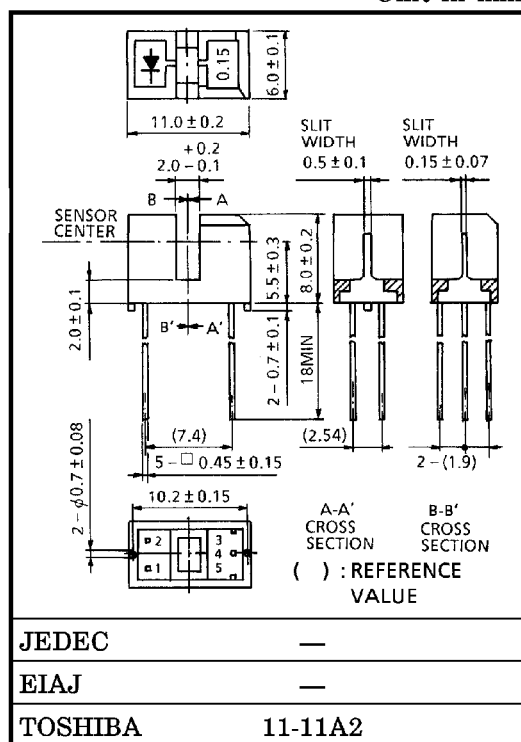

Weight : 0.6g (Typ.)

PIN CONNECTION

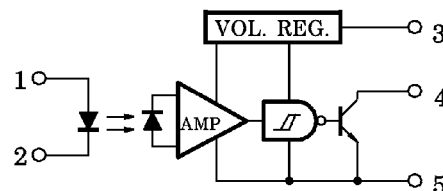

1. ANODE
2. CATHODE
3. VCC
4. OUT
5. GND

961001EBC2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
LED	Forward Current	I_F	50	mA
	Forward Current Derating (Ta > 25°C)	$\Delta I_F / ^\circ\text{C}$	-0.33	mA / °C
	Reverse Voltage	V_R	5	V
DETECTOR	Supply Voltage	V_{CC}	17	V
	Output Voltage	V_O	30	V
	Output Current	I_O	50	mA
	Power Dissipation	P_O	250	mW
	Power Dissipation Derating (Ta > 25°C)	$\Delta P_O / ^\circ\text{C}$	-3.33	mW / °C
Operating Temperature Range		T_{opr}	-25~85	°C
Storage Temperature Range		T_{stg}	-40~100	°C
Soldering Temperature (5s)		T_{sol}	260	°C

RECOMMENDED OPERATING CONDITIONS


CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
LED Forward Current	I_F	21*	—	25	mA
Supply Voltage	V_{CC}	4.5	5.0	17	V
Output Voltage	V_O	—	5.0	24	V
Low Level Output Current	I_{OL}	—	—	16	mA
Operating Temperature	T_{opr}	-25	—	85	°C

* 21mA is a value when 50% LED deterioration is taken into consideration.
Initial threshold input current shall be 10.5mA MAX.

ELECTRICAL CHARACTERISTICS (Unless Otherwise Specified, Ta = - 25~85°C, VCC = 5V ± 10%)

CHARACTERISTIC			SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
LED	Forward Current		V _F	I _F = 10mA, Ta = 25°C	1.00	1.15	1.30	V
	Reverse Current		I _R	V _R = 5V, Ta = 25°C	—	—	10	μA
	Peak Emitter Wavelength		λ _P	I _F = 15mA, Ta = 25°C	—	940	—	nm
DETECTOR	Low Level Supply Current		I _{CCL}	I _F = 15mA	—	—	5.0	mA
				I _F = 15mA, V _{CC} = 17V	—	—	5.2	
	High Level Supply Current		I _{CCH}	I _F = 0	—	—	3.0	mA
				I _F = 0, V _{CC} = 17V	—	—	3.2	
	Low Level Output Voltage		V _{OL}	I _{OL} = 16mA, I _F = 15mA Ta = 25°C	—	0.07	0.3	V
				I _{OL} = 16mA, I _F = 15mA V _{CC} = 17V	—	—	0.4	
	High Level Output Current		I _{OH}	I _F = 0, V _O = 30V	—	—	15	μA
	Peak Sensitivity Wavelength		λ _P	Ta = 25°C	—	900	—	nm
COUPLED	Threshold Input Current (H→L)		I _{FHL}	Ta = 25°C	—	—	6	mA
				V _{CC} = 17V	—	—	10.5	
	Hysteresis Ratio		I _{FHL} / I _{FLH}		—	1.5	—	—
	Propagation Delay Time	L→H	t _{pLH}	V _{CC} = 5V, I _F = 15mA R _L = 280Ω, Ta = 25°C (Note)	—	6	—	μs
		H→L	t _{pHL}		—	3	—	
	Rise Time		t _r		—	0.1	—	
	Fall Time		t _f		—	0.05	—	

NOTE : SWITCHING TIME TEST CIRCUIT

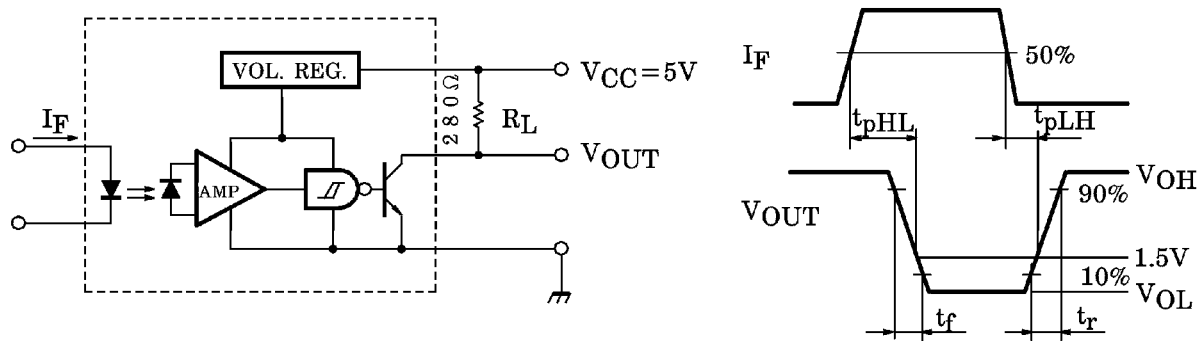

PRECAUTION

Please be careful of the followings.


- 1. Soldering should be performed after lead forming.
- 2. If chemicals are used for cleaning, the soldered surface only shall be cleaned with chemicals avoiding the whole cleaning of the package.
- 3. The container is made of polycarbonate. Polycarbonate is usually stable with acid, alcohol, and aliphatic hydrocarbons however, with pectochemicals (such as benzene, toluene, and acetone), alkali, aromatic hydrocarbons, or chloric hydrocarbons, polycarbonate becomes cracked, swollen, or melted. Please take care when chosing a packaging material by referencing the table below.





<Chemicals to avoid with polycarbonate>




	PHENOMENON	CHEMICALS
A	Little deterioration but staining	• nitric acid (low concentration), hydrogen peroxide, chlorine
B	Cracked, crazed, or swollen	• acetic acid (70% or more) • gasoline • methyl ethyl ketone, ehtyl acetate, butyl acetate • ethyl methacrylate, ethyl ether, MEK • acetone, m-amino alcohol, carbon tetrachloride • carbon disulfide, trichloroethylene, cresol • thinners, oil of turpentine • triethanolamine, TCP, TBP
C	Melted { } : Used as solvent.	• concentrated sulfuric acid • benzene • styrene, acrylonitrile, vinyl acetate • ethylenediamine, diethylenediamine • {chloroform, methyl chloride, tetrachloromethane, dioxane, } 1, 2-dichloroethane
D	Decomposed	• ammonia water • other alkali



- 4. During 100μs after turning on VCC, output voltage changes for stabilizing the inner circuit.
- 5. Supply the by-pass condenser up to 0.01μF between VCC and GND near device to stabilize the power supply line.

PRODUCT INDICATION

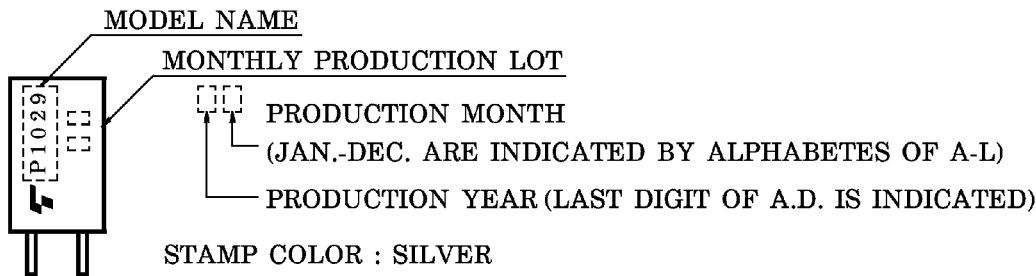

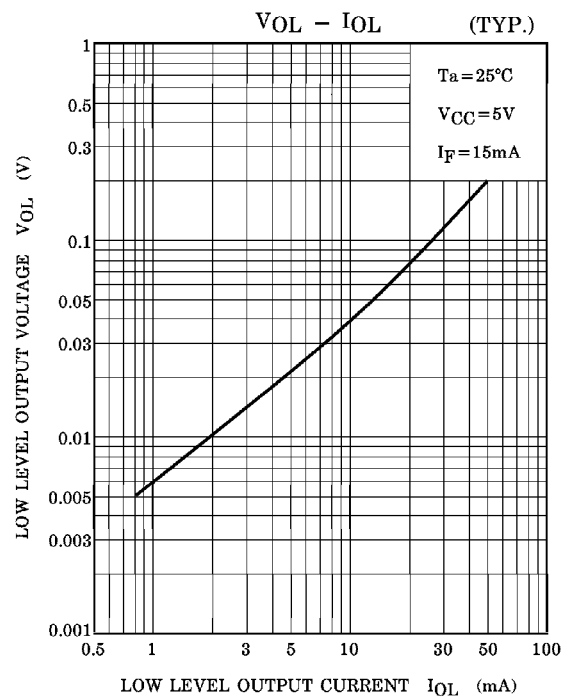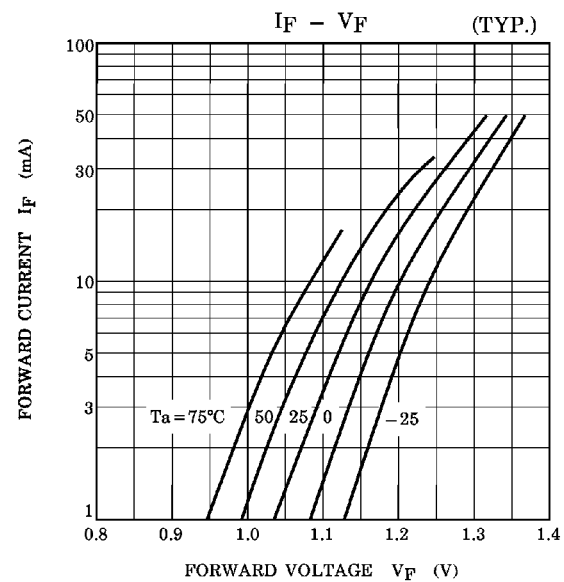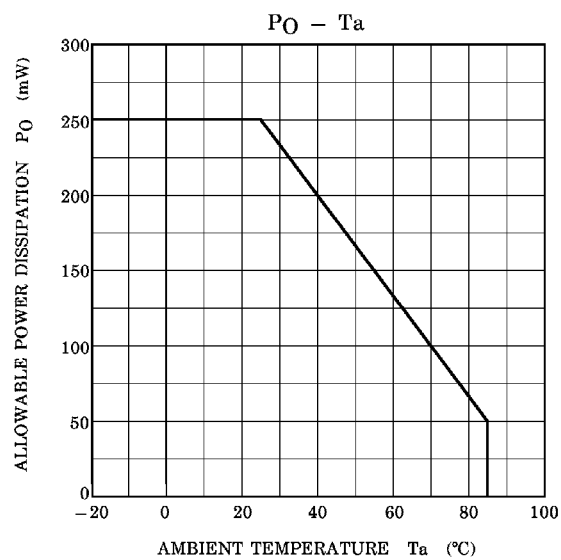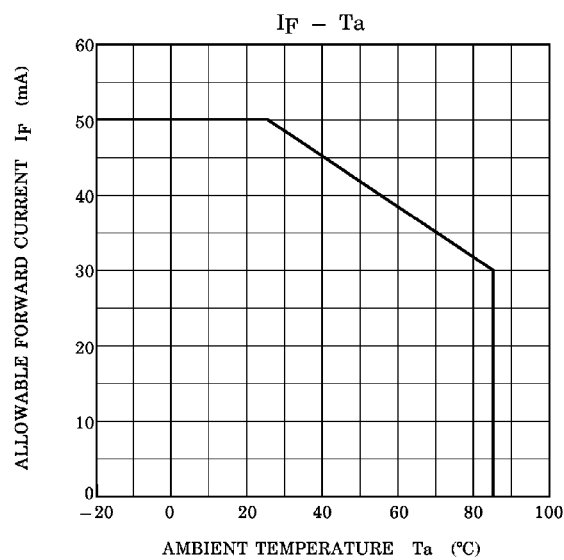

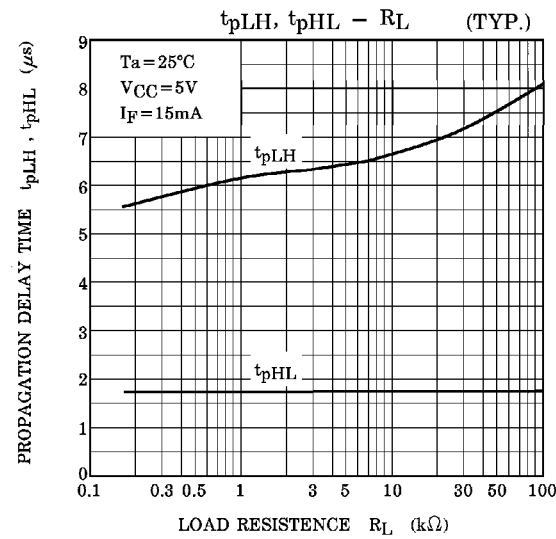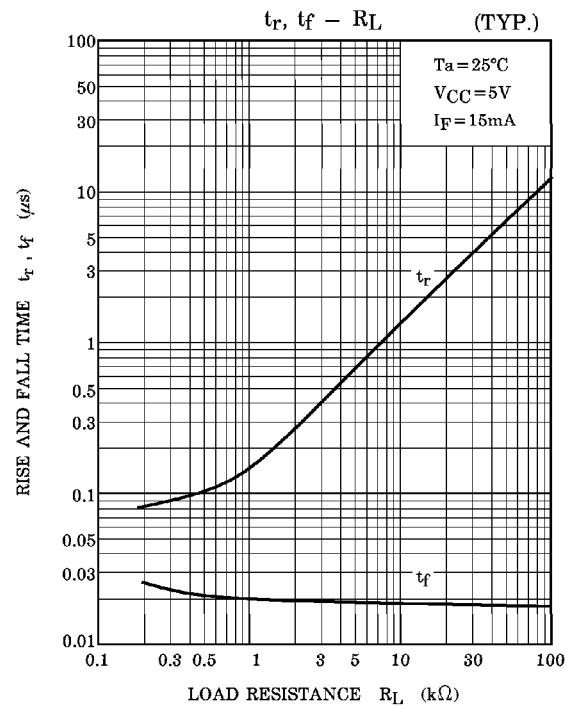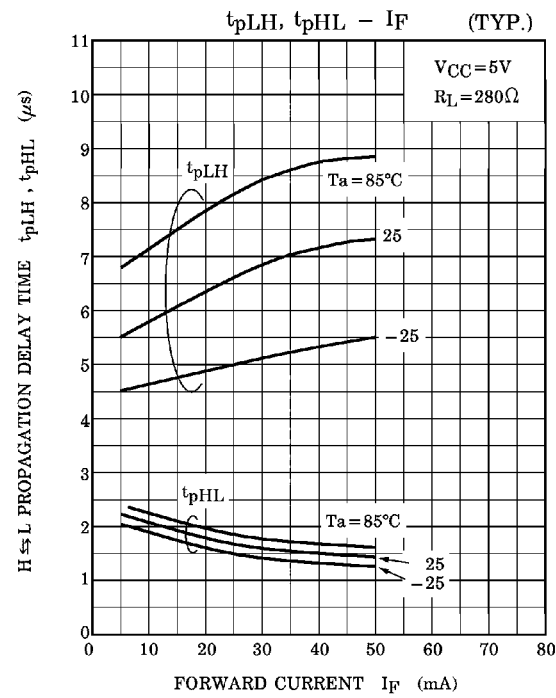

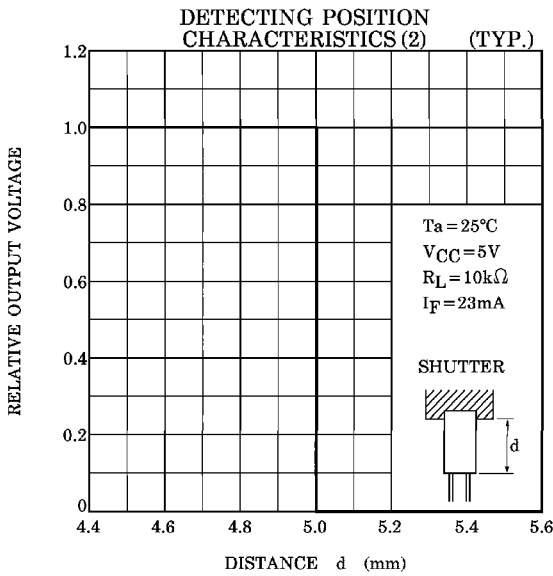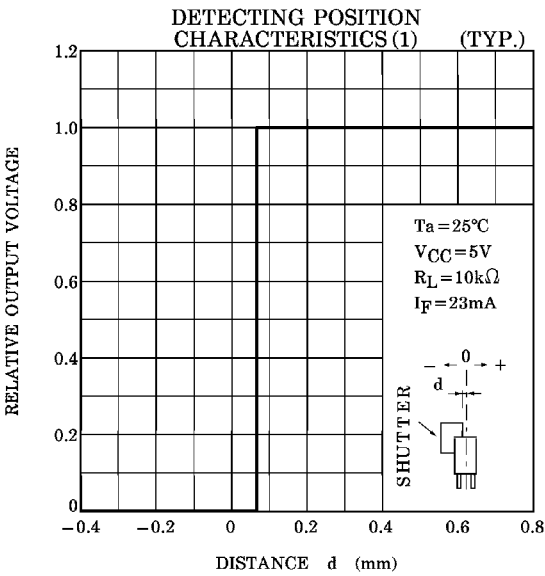

POSITIONING OF SHUTTER AND DEVICE

To operate correctly, make sure that the shutter and the device are positioned as shown in the figure below.

The slit pitch of the shutter must be set wider than the slit width of the device.
Determine the width taking the switching time into consideration.

