




# FLEXIBLE THROUGH-HOLE HEADER

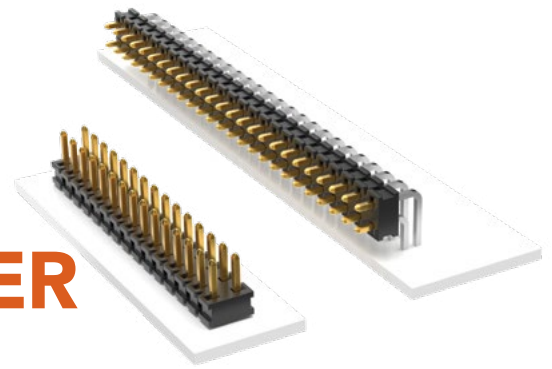

(2.00 mm) .0787" PITCH • A-TMMH SERIES

## A-TMMH

### Board Mates:

A-CLT, A-SQT, A-SQT,  
A-ESQT, A-SMM, A-MMS

A-TMMH	- 1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	TAIL OPTION
--------	-----	------------------	------------	----------------	------------	-------------

03 thru 50

Specify  
LEAD  
STYLE  
from  
chart

**-L**  
= 10 μ" (0.25 μm)  
Gold on post,  
Matte Tin on tail

**-T**  
= Matte Tin

**-D**  
= Double  
Row

**-RA**  
= Right-angle

## SPECIFICATIONS

### Insulator Material:

Black Liquid Crystal Polymer

### Terminal Material:

Phosphor Bronze

### Plating:

Sn or Au over 50 μ" (1.27 μm) Ni

### Current Rating (A-TMMH/A-ESQT):

4.5 A per pin  
(2 pins powered)

### Current Rating (A-TMMH/A-SQT):

5.1 A per pin  
(2 pins powered)

### Operating Temp Range:

-55 °C to +105 °C with Tin;

-55 °C to +125 °C with Gold

### Voltage Rating:

281 VAC mated with A-SQW;

250 VAC mated with A-SQT

LEAD STYLE	A	B	C
-01	(7.67) .302	(3.20) .126	(2.46) .097
-04	(6.45) .254	(1.91) .075	(2.57) .101
-05	(6.45) .254	(1.65) .065	(2.29) .090





## PROCESSING

### Lead-Free Solderable:

Yes

## ALSO AVAILABLE

Other Platings  
(MOQ Required)

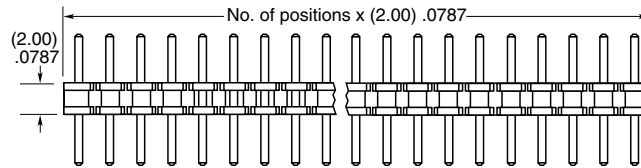

### Note:

Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

[samtec.com/Automotive](http://samtec.com/Automotive)

A-221

Samtec shall only comply with IATF-16949 on products it certifies as Automotive Custom Design "ACD" or on those designated with "A-" Samtec part # prefix. "A-" products are designed to Samtec's specifications not customers' specifications. Contact autosalesgroup@samtec.com with questions.