

# PNJ4812M (Tentative)

## Photodiode with amplifier functions

For infrared remote control systems

### ■ Features

- Center frequency  $f_0$  : 38.0 kHz
- Operating supply voltage  $V_{CC}$  : 3.3 V (typ.)
- Adoption of visible light cutoff resin

### ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

| Parameter                     | Symbol    | Rating      | Unit             |
|-------------------------------|-----------|-------------|------------------|
| Operating supply voltage      | $V_{CC}$  | -0.5 to +6  | V                |
| Power dissipation             | $P_D$     | 200         | mW               |
| Operating ambient temperature | $T_{opr}$ | -20 to +70  | $^\circ\text{C}$ |
| Storage temperature           | $T_{stg}$ | -40 to +100 | $^\circ\text{C}$ |
| Soldering temperature *       | $T_{sol}$ | 260         | $^\circ\text{C}$ |

Note) \*: Less than 5 s

### ■ Electrical Characteristics $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$ , $V_{CC} = 3.3\text{ V}$

| Parameter                     | Symbol    | Conditions   | Min            | Typ      | Max      | Unit          |
|-------------------------------|-----------|--|----------------|----------|----------|---------------|
| Operating supply voltage      | $V_{CC}$  |  | 2.7            | 3.3      | 5.5      | V             |
| Output voltage low-level *2   | $V_{OL}$  | $L \leq 11.0\text{ m}$ , $I_{OL} = 400\ \mu\text{A}$ | —              | 0.1      | 0.3      | V             |
| Output voltage high-level     | $V_{OH}$  | No signal condition                                  | $V_{CC} - 0.2$ | $V_{CC}$ | $V_{CC}$ | V             |
| Supply current                | $I_{CC}$  | No signal condition                                  | —              | 0.3      | 0.45     | mA            |
| Maximum reception distance *1 | $L_{max}$ |  | 11.0           | —        | —        | m             |
| 45 ° detection distance *1    | $L_{45}$  | Incident angle of the signal = 45 °                  | 5.0            | —        | —        | m             |
| Pulse width low-level *1      | $t_{WL}$  | $L \leq 0.1\text{ m to } 11.0\text{ m}$ , 16 pulse   | 200            | 400      | 600      | $\mu\text{s}$ |
| Pulse width high-level *1     | $t_{WH}$  | $L \leq 0.1\text{ m to } 11.0\text{ m}$ , 16 pulse   | 200            | 400      | 600      | $\mu\text{s}$ |
| Center frequency              | $f_0$     |  | —              | 38.0     | —        | kHz           |

Note) 1. Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7031 measuring methods for diodes.

2. \*1: Burst wave form Figure 1

\*2: Burst wave form Figure 2

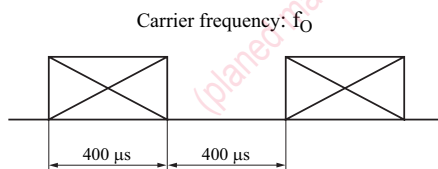


Figure 1



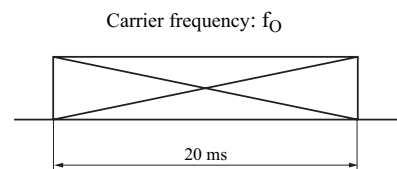


Figure 2


### 3. Measurement circuit

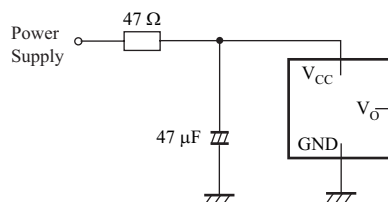

■ Block Diagram

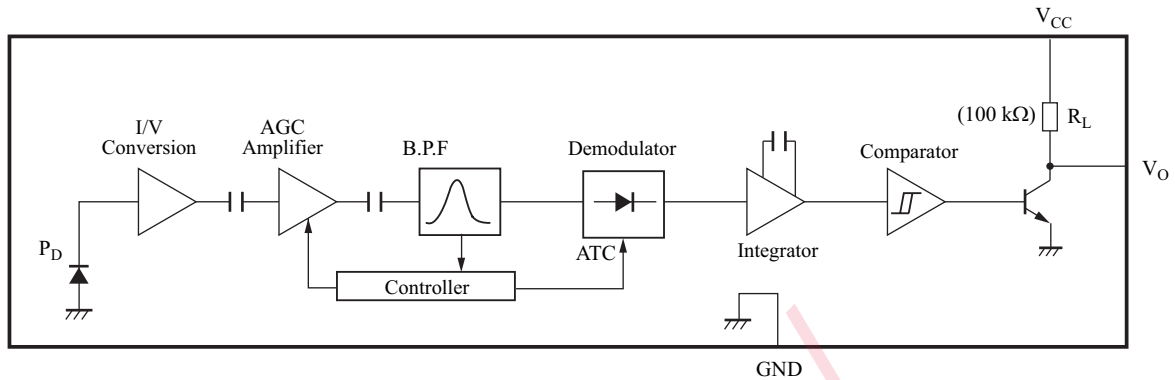


■ Panasonic Transmitter Specifications

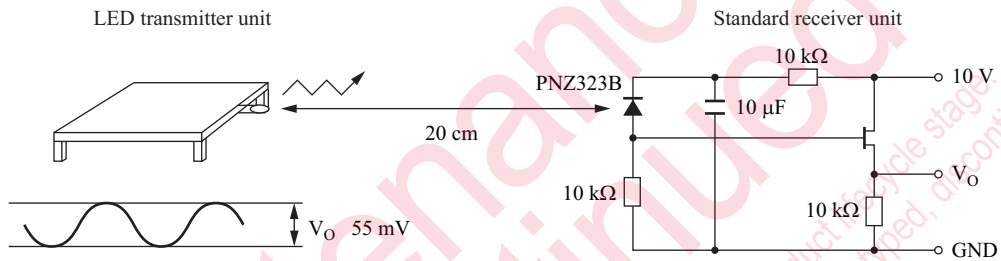

1. The output of the LED transmitter unit is adjusted so that the output standard receiver unit,  $V_O$  may be 55 mV when transmitting waves (duty = 50%) are output from the transmitter unit, where the sensitivity to infrared emitters (SIR) of PNZ323B is  $0.53 \mu\text{A}$  when the irradiance  $H$  is  $12.45 \mu\text{W}/\text{cm}^2$ .
2. The maximum detection distance of this specification is guaranteed by  $t_{WH}$  and  $t_{WL}$  being within the limits when constant 16 pulses are transmitted with the output of the transmitter unit corresponded to the maximum detection distance in the system above.  
(The maximum detection distance is measured in the darkness without disturbing noises.)

■ Package (Unit: mm)

LPTLSN3S0002

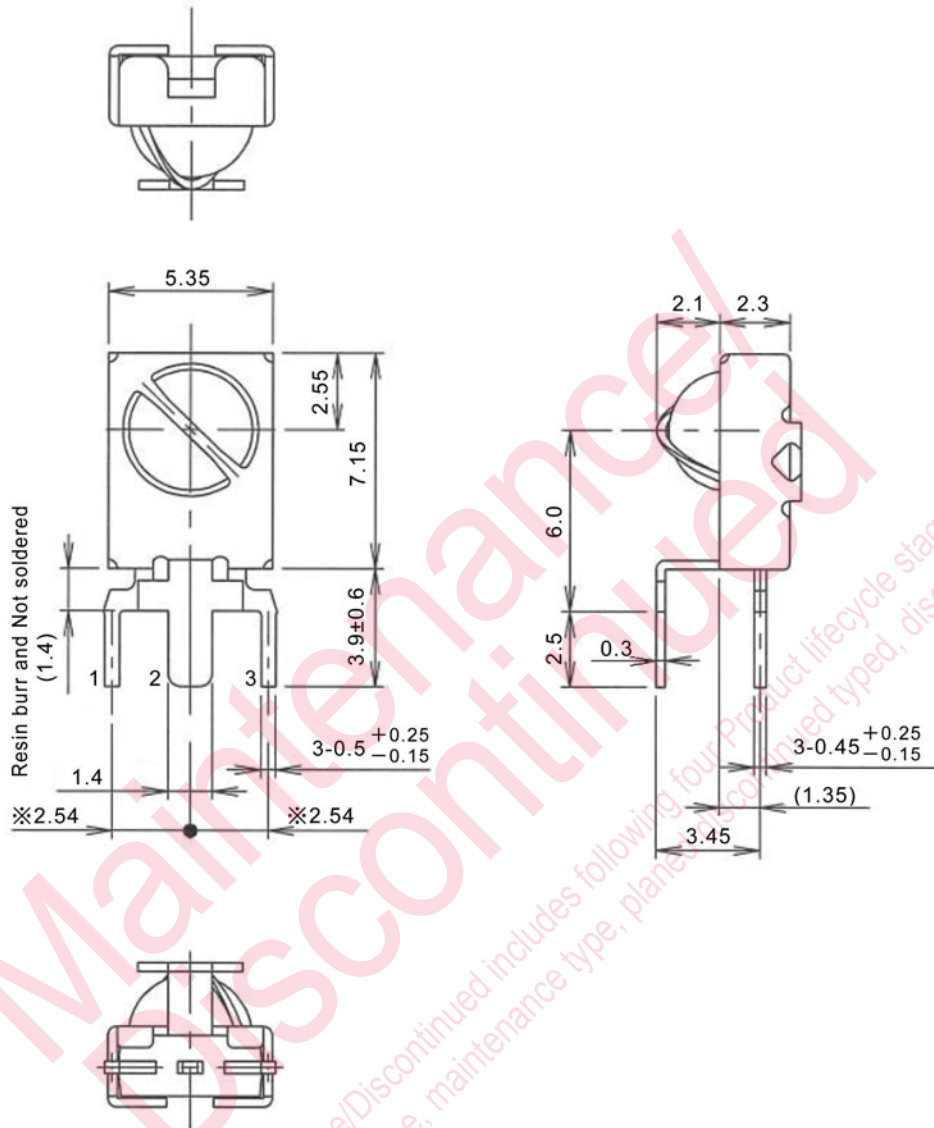

• Pin name

1. V<sub>O</sub>
2. GND
3. V<sub>CC</sub>

## Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information de-scribed in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book.  
Please consult with our sales staff in advance for information on the following applications, moreover please exchange documents separately on terms of use etc.: Special applications (such as for in-vehicle equipment, airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, medical equipment and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.  
Unless exchanging documents on terms of use etc. in advance, it is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.  
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. We do not guarantee quality for disassembled products or the product re-mounted after removing from the mounting board.  
When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) When reselling products described in this book to other companies without our permission and receiving any claim of request from the resale destination, please understand that customers will bear the burden.
- (8) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.