

Part Number: PD5045
Encapsulated Tilt Switch
Product Data Sheet

PICTURE




✓RoHS Compliant


FEATURES

- Resistant to Ambient Environmental Conditions
- Housing Material : ABS Plastic
- Construction : Thermo Resist Epoxy Encapsulated
- Wires : #18 AWG Stranded Copper
Black Neoprene Insulation

OPERATION

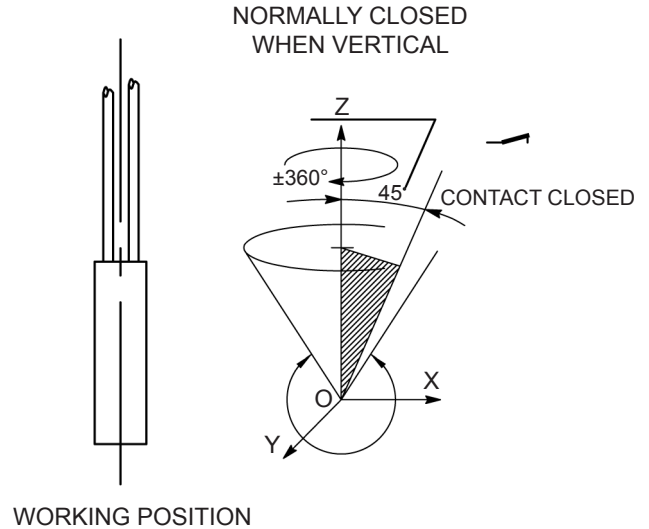

DIMENSIONS

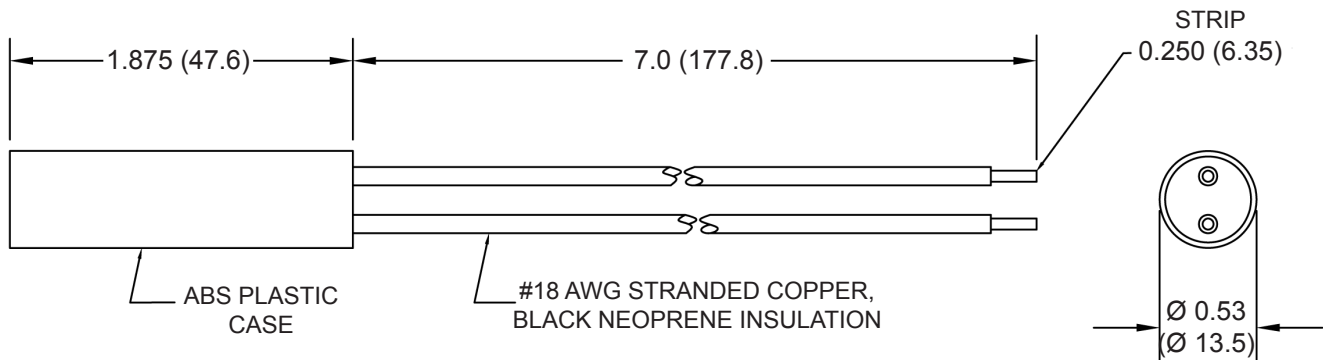

Drawings not to scale.
 All dimensions in inches (mm) nominal.

SPECIFICATION

Output	HIGH COMMUTATION TRIAC
Load Current Range Continuous	0.1 to 2.5 A (@ 23°C ambient)
Load Voltage Range	110 to 240 VAC
Operation Angle	45° ± 10°
Operation Temperature	-25° to +70°C

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405

Belgium: + 32 (0)12 390400 - Comus Europe Ltd (Assembletech) UK: +44 (0) 1255 862236 - Germany: +49 (0)911 923 15 943 - Netherlands: +31(0)45 54 39 345 - India: +(91) (44) 43219090

©2015 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA