


Right-angle SMT type 15-contacts male board connector RMC-EA15PMY-OM15-M() () ()

Connectors for Small Sized Interface

For PCB, with Location Peg

Right-angle SMT

Conforming to PCMCIA/JEITA


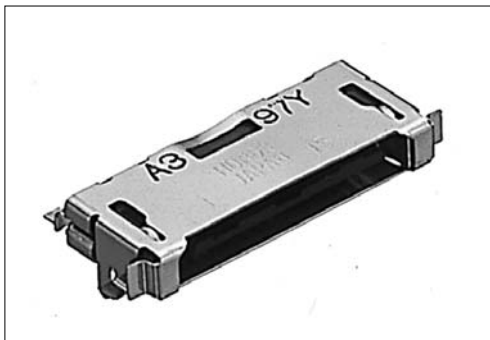


● Configuration of product Part No.

RMC- EA 15 P MY- OM15- M () () ()

- | | | | | | | | | | |
|---------------|---|-----------------------|------------------------|----------------------|------------------------|---------------------------|---|--|--|
| ① Series name | ② EA: Contacts, Hold down, Locking hardware, One-piece molded, EMI-filtered | ③ No. of contacts: 15 | ④ P: With location peg | ⑤ MY: SMT type, male | ⑥ Off-set: OM15 1.5 mm | ⑦ M: One-piece molded key | ⑧ Form of Misinsertion prevention key
A: A type, B: B type | ⑨ Location of misinsertion prevention key
Blank: Key-less, 1: 1, 2: 2, 3: 3 | ⑩ Insulator colors
Applicable only to models with the MB form of key (For the models with other key forms, these insulator colors are all black.)
Blank: Brown BK: Black |
|---------------|---|-----------------------|------------------------|----------------------|------------------------|---------------------------|---|--|--|

	Forms of keys	Use*
A type		LAN
B type		MODEM

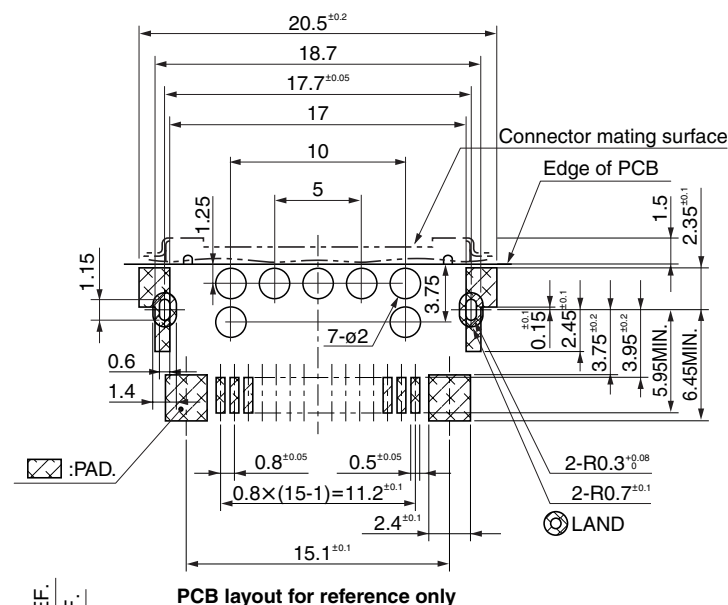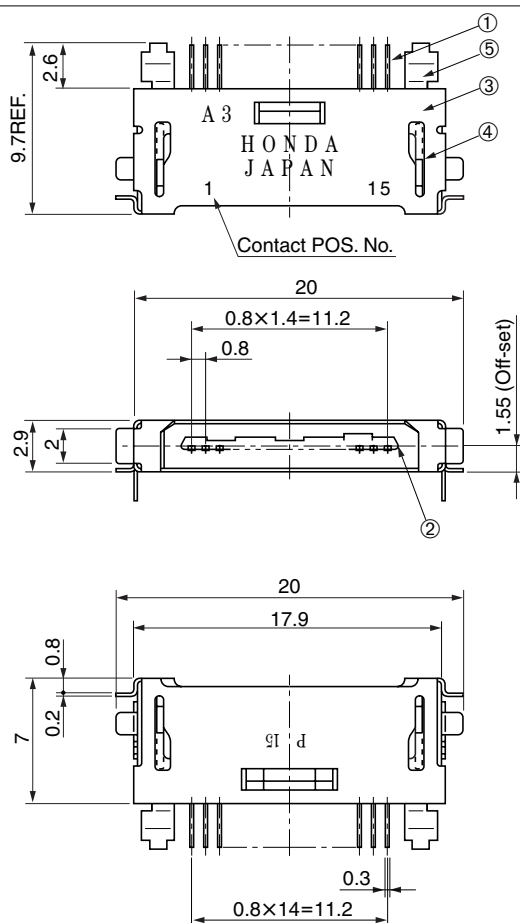


● Components

① Contacts
② Insulator
③ Shell
④ Lock hardware
⑤ Hold down

- Use this connector as an interface connector for a mobile computer or other such equipment.
- Recommended PCB thickness: 1 mm
- Because some types of the connectors have no one-piece molded key, please contact us for details.

● Locations of polarization keys

Part No.	Key location	Identification Examples	Mating connectors
RMC-EA15PMY-OM15-M()	-	A	RMC-E15F4S-LC5()-M()
RMC-EA15PMY-OM15-M()1	1	A1	RMC-E15F4S-LC5()-M()23
RMC-EA15PMY-OM15-M()2	2	A2	RMC-E15F4S-LC5()-M()13
RMC-EA15PMY-OM15-M()3	3	A3	RMC-E15F4S-LC5()-M()12



Mating connectors: Refer to the table shown