

DUAL VIDEO 6dB AMPLIFIER WITH 75Ω DRIVER

■ GENERAL DESCRIPTION


NJM2268 is a dual video 6dB amplifier with 75Ω drivers for S-VHS VCRs, HI-BAND VCRs, etc.. One channel has clamp function that fixes DC level of video signal and another one is bias type. Furthermore it has 75Ω drivers to be connected to TV monitors directly and sag corrective circuits that prevent the generation of sag with smaller capacitance than ever.

Its operating supply voltage is 4.85 to 9V and bandwidth is 7MHz.

■ FEATURES

- Wide Operating Voltage (4.85~9.0V)
- Dual Channel (Clamp Type, Bias Type)
- Internal Driver Circuit For 75Ω Load
- SAG Corrective Function
- Wide Frequency Range 7MHz
- Low Operating Current 14.0mA (Dual)
- Package Outline DIP8, DMP8, SSOP8
- Bipolar Technology

■ PACKAGE OUTLINE



NJM2268D



NJM2268V


■ RECOMMENDED OPERATING CONDITION

- Operating Voltage V^+ 4.85~9.0V

■ APPLICATIONS

- VCR, Video Camera, TV, Video Disc Player

■ BLOCK DIAGRAM

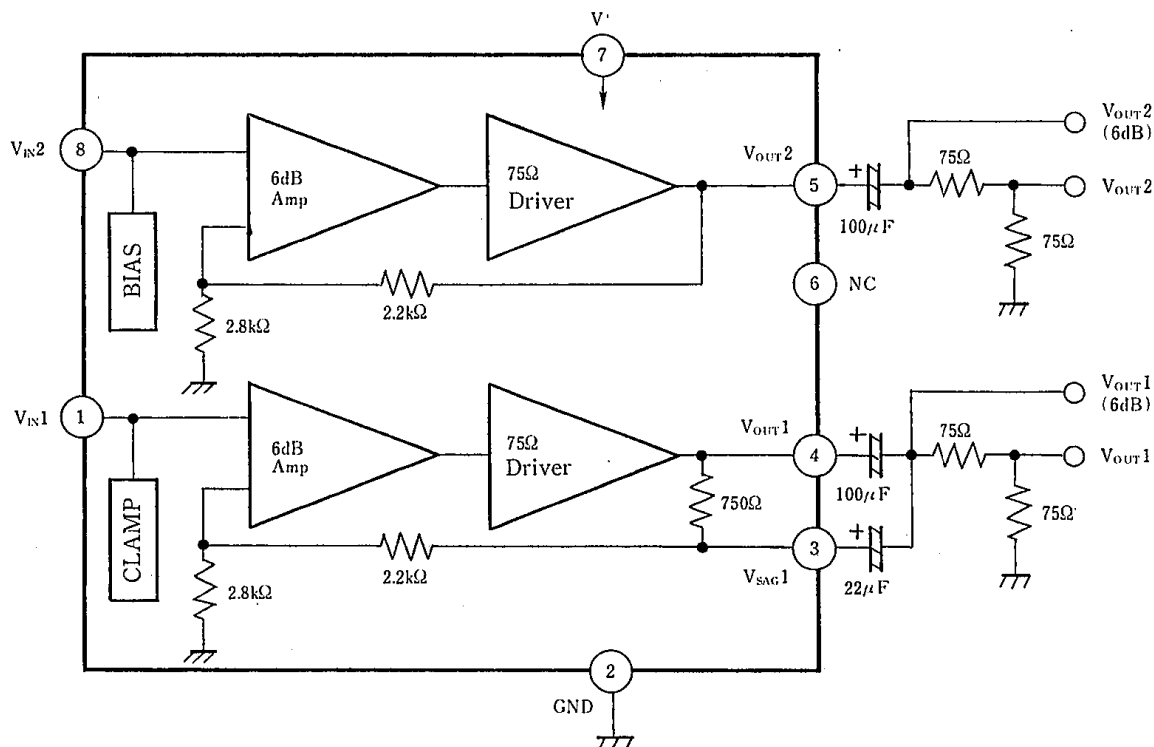

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V*	10	V
Power Dissipation	Pd	(DIP8) 500	mW
		(DMP8) 300	mW
		(SSOP8) 250	mW
Operating Temperature Range	Topr	-40~+85	°C
Storage Temperature Range	Tstg	-40~+125	°C

■ ELECTRICAL CHARACTERISTICS:

(V*=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	Icc	No Signal	—	14.0	18.2	mA
Voltage Gain	Gv	VIN=1MHz, 1Vp-p Sinewave	5.7	6.2	6.7	dB
Frequency Characteristic	Gf	VIN=1Vp-p, Sinewave, 7MHz/1MHz	—	—	±1.0	dB
Differentail Gain *	DG	VIN=1Vp-p, Staircase	—	1.0	3.0	%
Differentail Phase *	DP	VIN=1Vp-p, Staircase	—	1.0	3.0	deg
Crosstalk	CT	VIN=4.43MHz, 1Vp-p, Sinewave	—	-70	—	dB
Gain Offset	GCH	VIN=1MHz, 1Vp-p, GCH=VOUT1-VOUT2	—	—	±0.5	dB
Input Clamp Voltage	VCL		1.79	1.91	2.03	V
Input Bias Voltage	VBI		2.56	2.84	3.12	V
SAG Terminal Gain	GSAG		35	45	—	dB

NOTE: "*" is applied to clamp type input side only/


5

■ APPLICATION


Oscillation Prevention

It is much effective to insert LPE (Cutoff Frequency 70MHz) under light loading conditions ($R_L \gg 1k\Omega$).

This IC requires 1MΩ resistance between INPUT and GND pin for clamp type input since the minute current causes an unstable pin voltage.

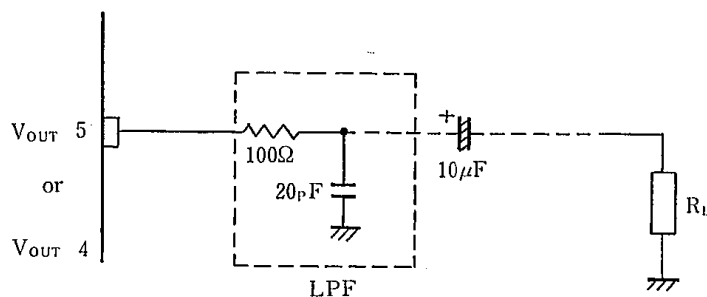

■ TEST CIRCUIT





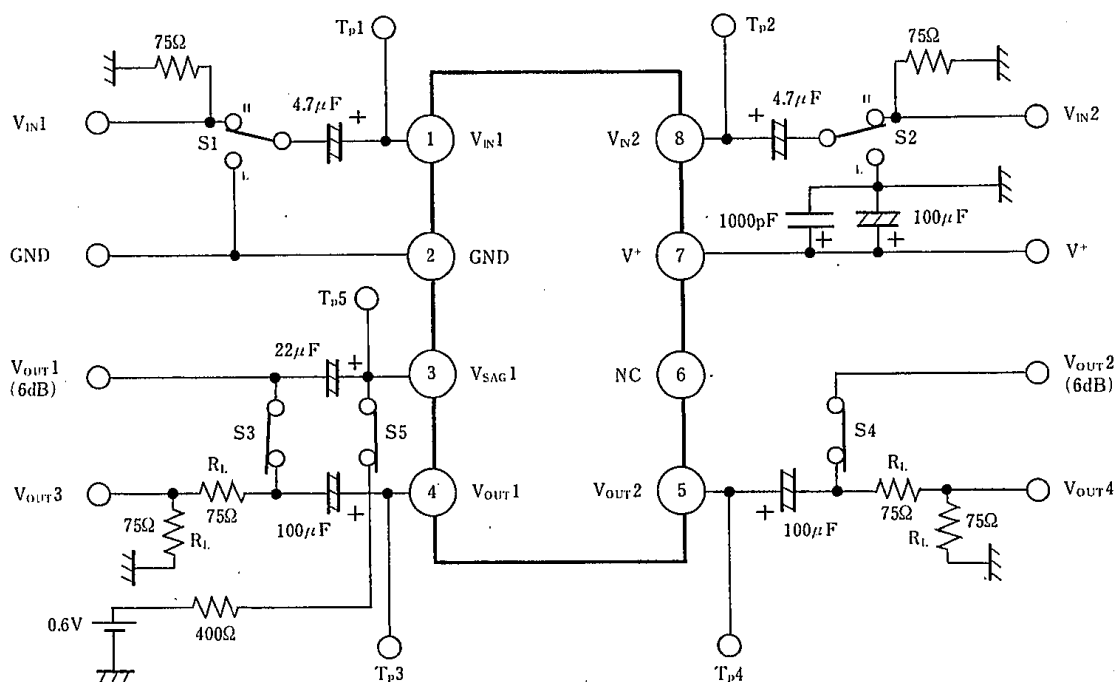


■ TEST METHODES

PARAMETER	SYMBOL	SWITCH CONDITIONS						CONDITIONS
		S1	S2	S3	S4	S5	S6	
Supply Current	I_{CC}	H	H					7PIN Sink Current
Voltage Gain	G_V	H	H	ON	ON			V_{OUT1}/V_{IN1} , V_{OUT2}/V_{IN2} at $V_{IN1}(V_{IN2})=1\text{MHz}$, $1V_{P-P}$, Sinewave
Frequency Characteristic	G_f	H	H	ON	ON			G_{V1M} ; Voltage Gain at $V_{IN1}(V_{IN2})=1\text{MHz}$, $1V_{P-P}$ G_{V10M} ; Voltage Gain at $V_{IN1}(V_{IN2})=10\text{MHz}$, $1V_{P-P}$ $G_f = G_{V10M} - G_{V1M}$
Differential Gain	DG	H	H	ON	ON			Measuring V_{OUT3} at V_{IN1} =Staircase Signal
Differential Phase	DP	H	H	ON	ON			Measuring V_{OUT3} at V_{IN1} =Staircase Signal
Crosstalk	CT	H	L	ON	ON			V_{OUT2}/V_{OUT1} at $V_{IN1}=4.43\text{MHz}$, $1V_{P-P}$, Sinewave V_{OUT1}/V_{IN2} at $V_{IN2}=4.43\text{MHz}$, $1V_{P-P}$, Sinewave
Gain Offset	G_{CH}	H	H	ON	ON			$G_{V1} = V_{OUT1}/V_{IN1}$, $G_{V2} = V_{OUT2}/V_{IN2}$ $G_{CH} = G_{V1} - G_{V2}$
Input Clamp Voltage	V_{CL}	H	H					Measuring at TP1
Input Bias Voltage	V_{BI}	H	H					Measuring at TP2
SAG Terminal Gain	G_{SAG}	H	H			ON	ON	TP3 Voltage; V_{O1A} , TP5 Voltage; V_{S01A} TP3 Voltage; V_{O1B} , TP5 Voltage; V_{S01B} $G_{SAG} = 20 \log \{ (V_{O1B} - V_{O1A}) / (V_{S01A} - V_{S01B}) \}$


■ TERMINAL FUNCTION:

($V^+=5.0V$, $T_a=25^\circ C$)


PIN No.	PIN NAME	SYMBOL	EQUIVALENT CIRCUIT	FUNCTIONS
1	Input Clamp Terminal	V_{IN1}		Input terminal of $1V_{P-P}$ composite Signal or Y signal Clamp level is 1.9V
2	GND	GND		Ground
3	SAG correction	V_{SAG1}		SAG caused by a coupling capacitor of the output can be prevented by connecting this terminal with the output terminal through an external capacitor. (see block diagram) When SAG correcting function is not necessary, this terminal must be connected with pin "4" directly.
4	Video Output1	V_{OUT1}		Output terminal (clamp side) that can drive 75Ω line.
5	Video Output2	V_{OUT2}		Output terminal (bias side) that can drive 75Ω line.
6	No Connection	NC		
7	V^+	V^+		Supply Voltage
8	Input Clamp Terminal	V_{IN2}		Input terminal of $1V_{P-P}$ color signal. Bias level is 2.8V.

■ TYPICAL CHARACTERISTICS


Operating Current vs. T_a
($V^+ = 5\text{ V}$)

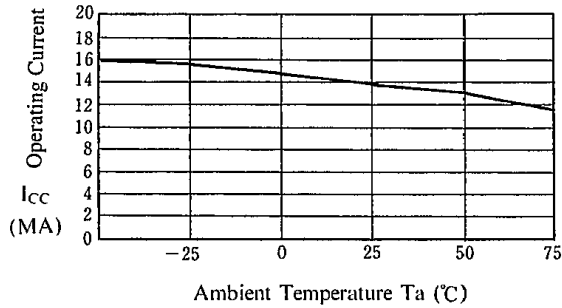


Input DC Level vs. T_a
($V^+ = 5\text{ V}$)

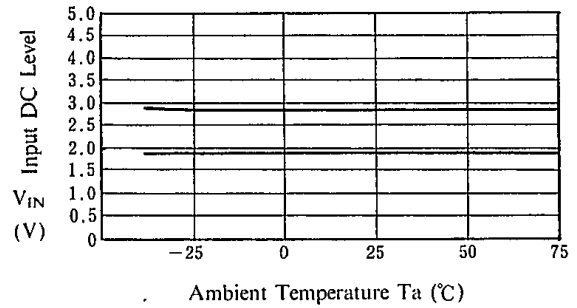


Output DC Level vs. T_a
($V^+ = 5\text{ V}$)

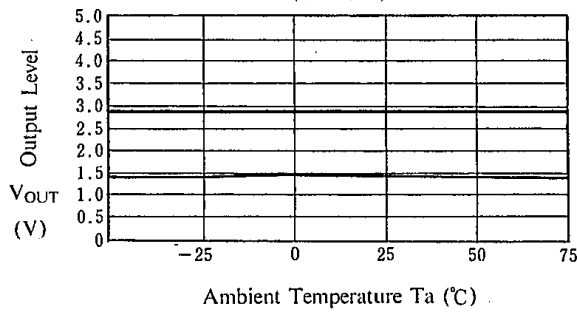


SAG Terminal Voltage vs. T_a
($V^+ = 5\text{ V}$)

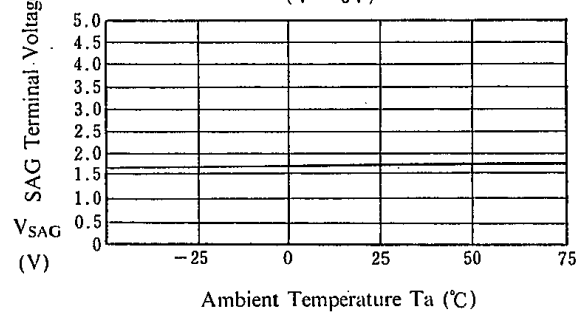







SAG Terminal Gain vs. T_a
($V^+ = 5\text{ V}$)

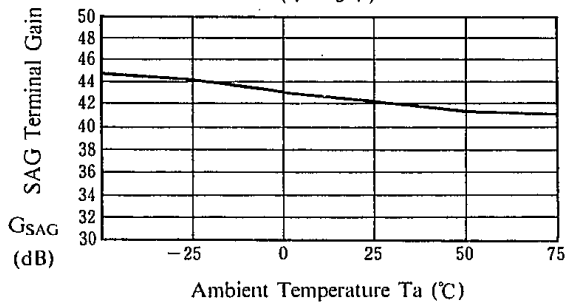







Voltage Gain vs. T_a (Clamp Type Input)
($V^+ = 5\text{ V}$, $1V_{p-p}$, 1MHz, staircase signal input)

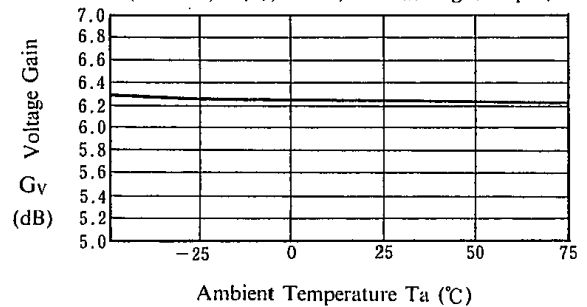

TYPICAL CHARACTERISTICS

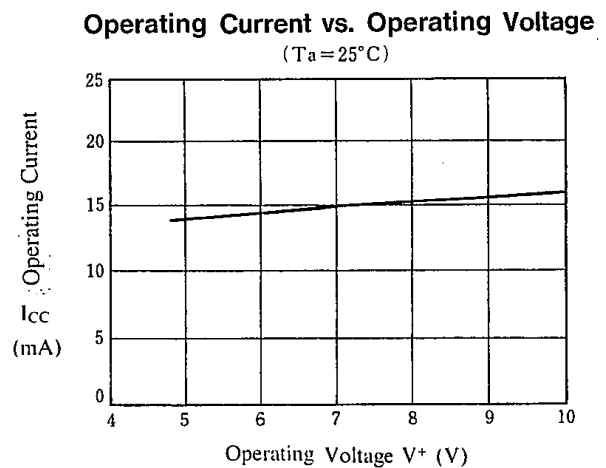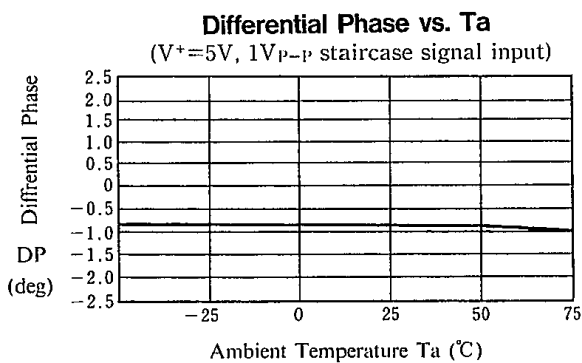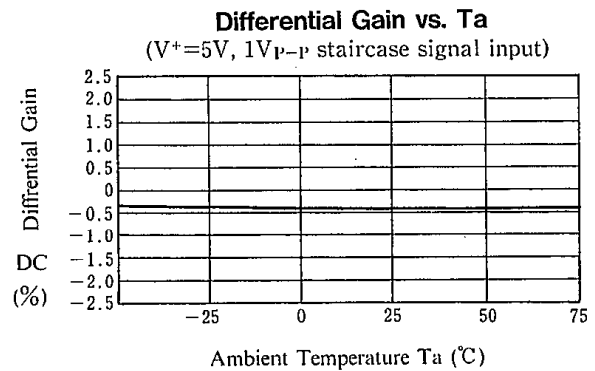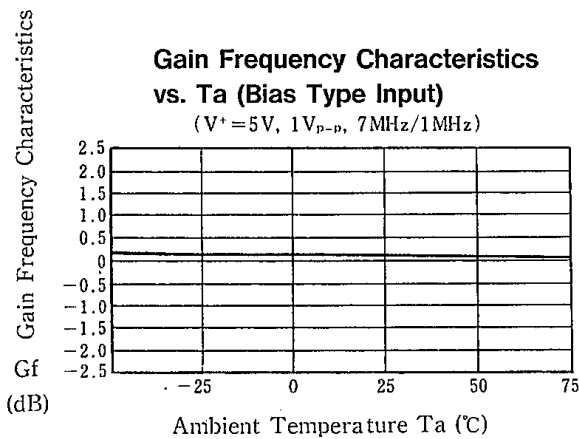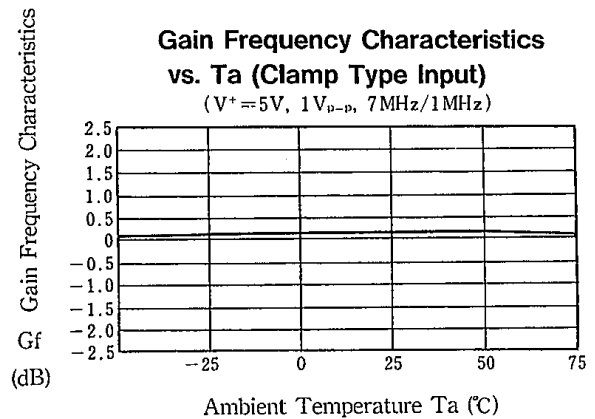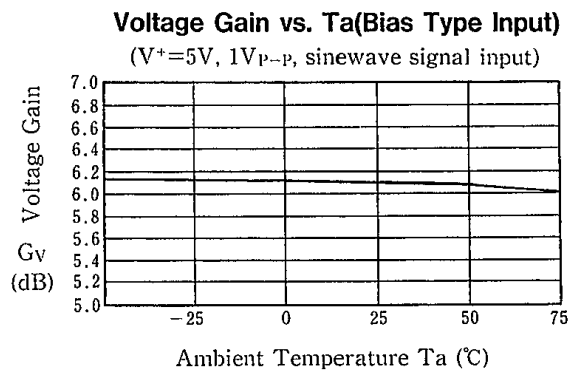

■ TYPICAL CHARACTERISTICS

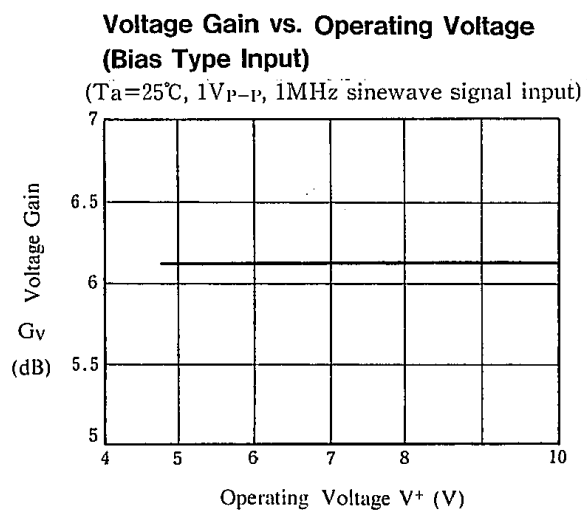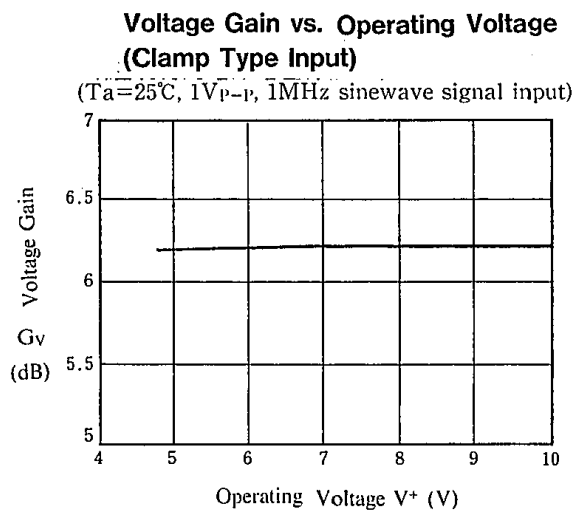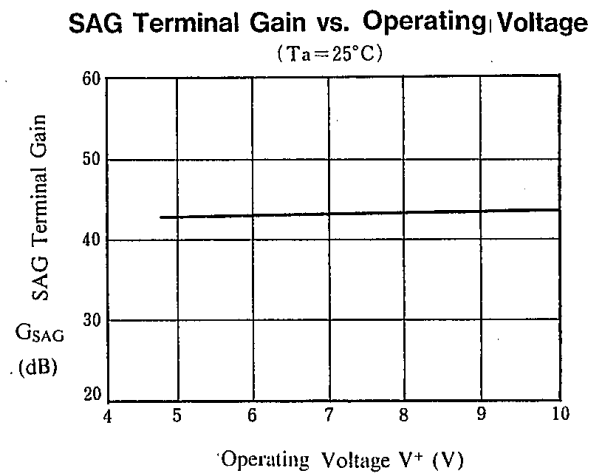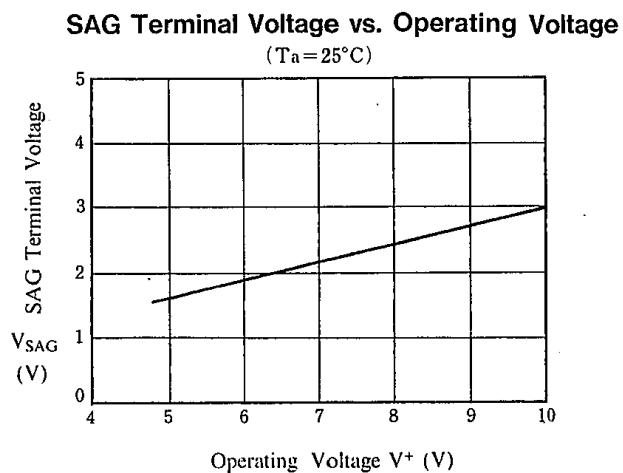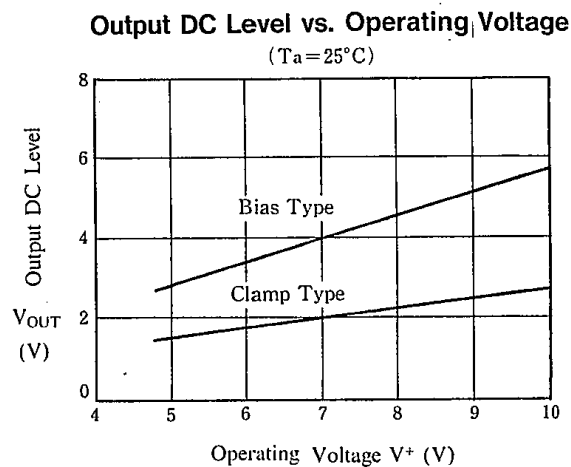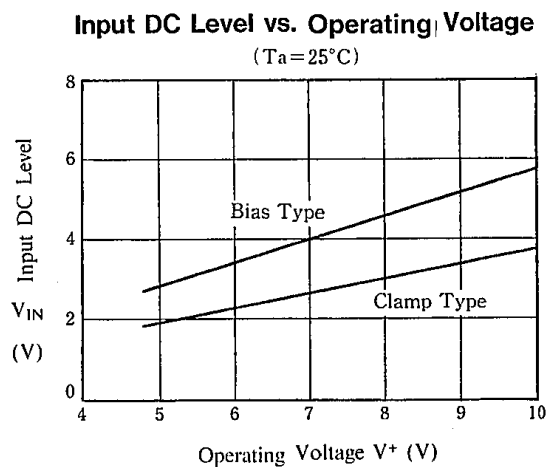


5

TYPICAL CHARACTERISTICS


Gain Frequency Characteristics vs. Operating Voltage (Clamp Type Input)

($T_a=25^\circ\text{C}$, $1V_{p-p}$, 7MHz/1MHz)

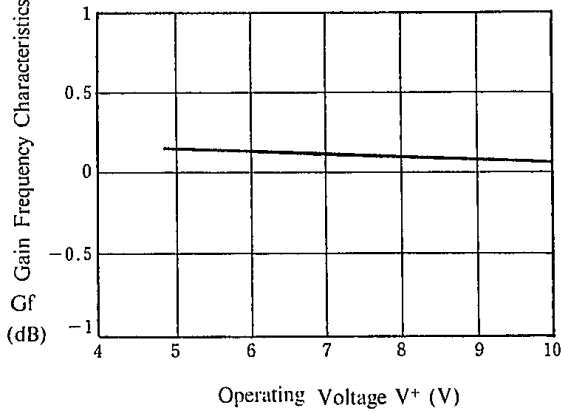


Gain Frequency Characteristics vs. Operating Voltage (Bias Type Input)

($T_a=25^\circ\text{C}$, $1V_{p-p}$, 7MHz/1MHz)

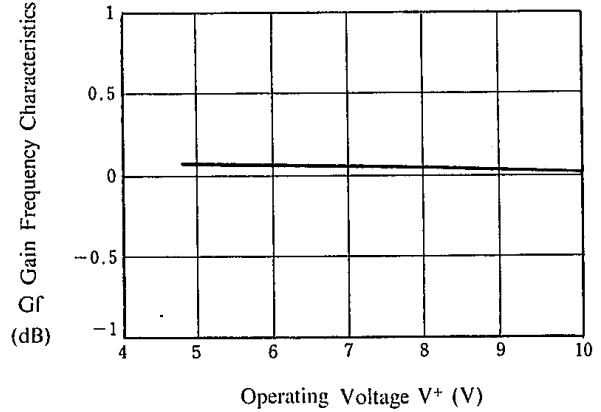


Differential Gain vs. Operating Voltage

($T_a=25^\circ\text{C}$, $1V_{p-p}$, staircase signal input)

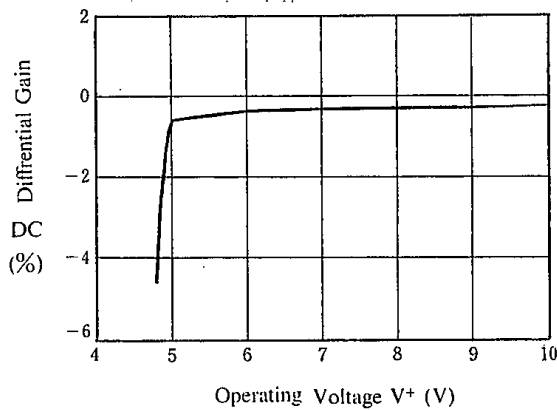


Differential Phase vs. Operating Voltage

($T_a=25^\circ\text{C}$, $1V_{p-p}$, staircase signal input)

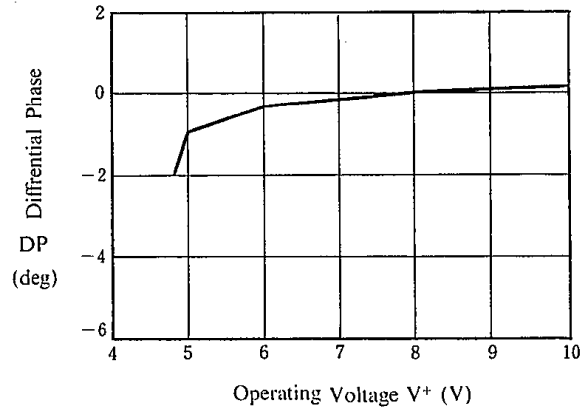


Voltage Gain vs. Frequency (Clamp Type Input)

($T_a=25^\circ\text{C}$, $V^+=5V$, $1V_{p-p}$ sinewave signal input)






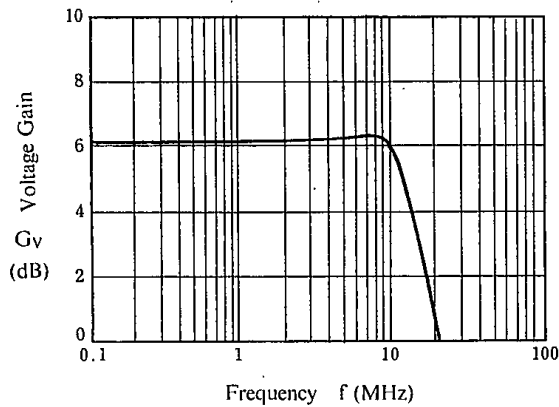


Voltage Gain vs. Frequency (Bias Type Input)






($T_a=25^\circ\text{C}$, $V^+=5V$, $1V_{p-p}$ sinewave signal input)

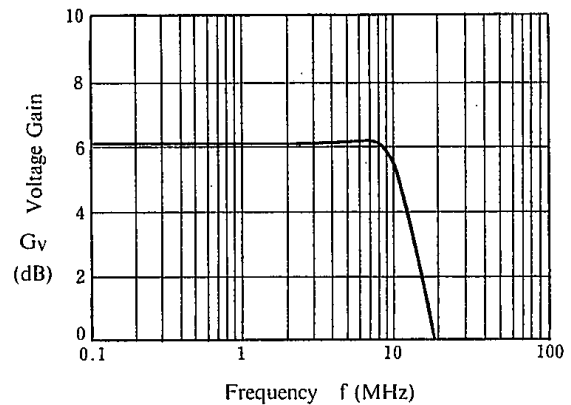

■ TYPICAL CHARACTERISTICS

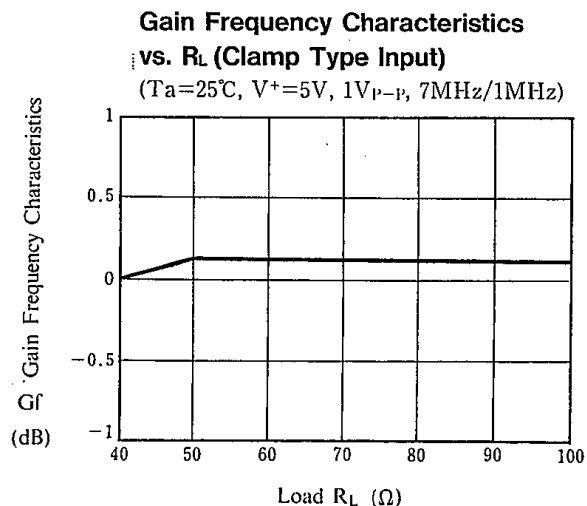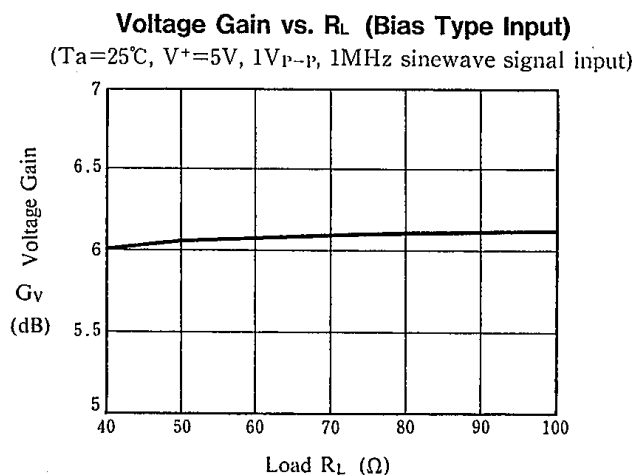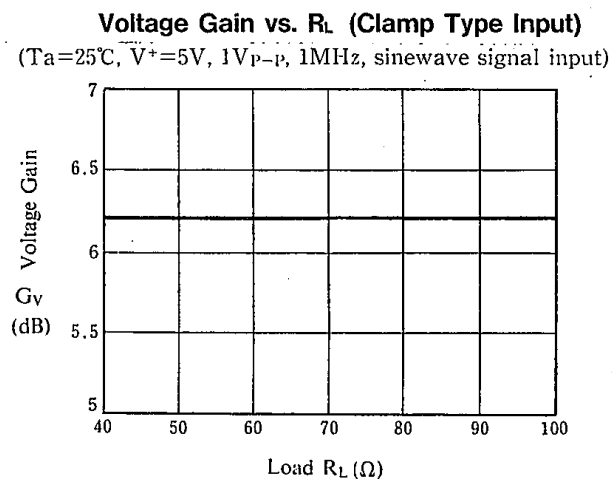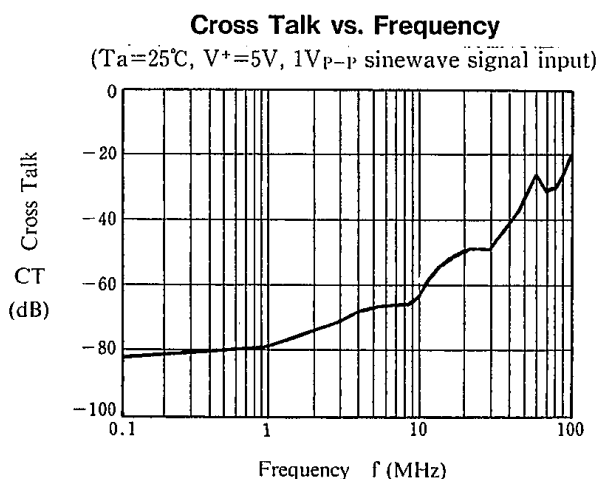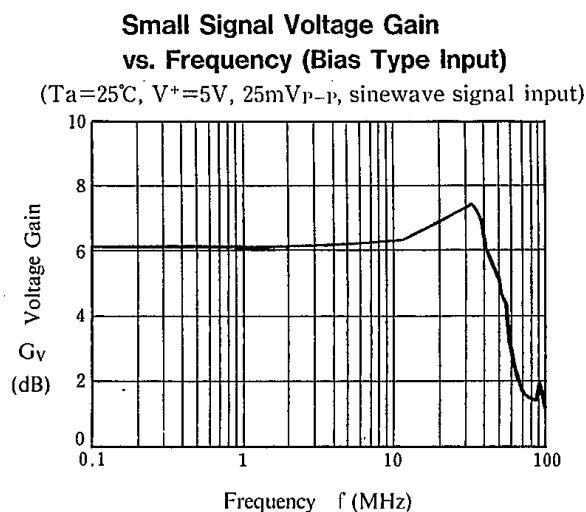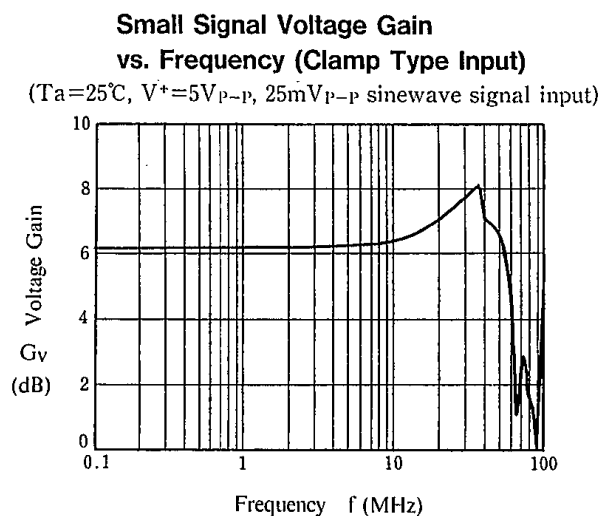


TYPICAL CHARACTERISTICS

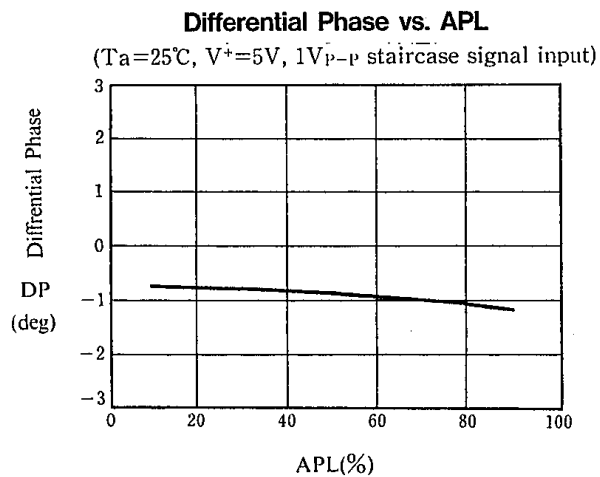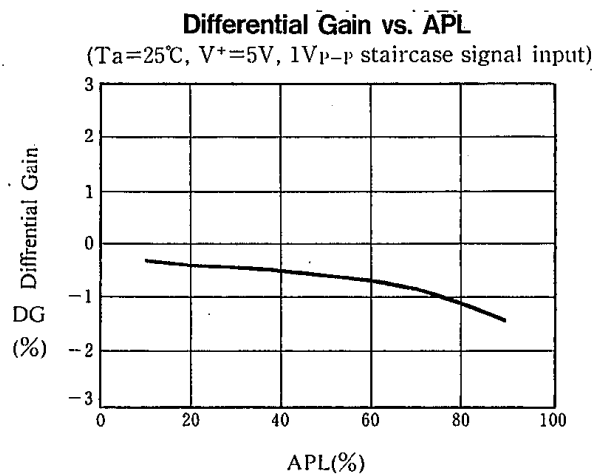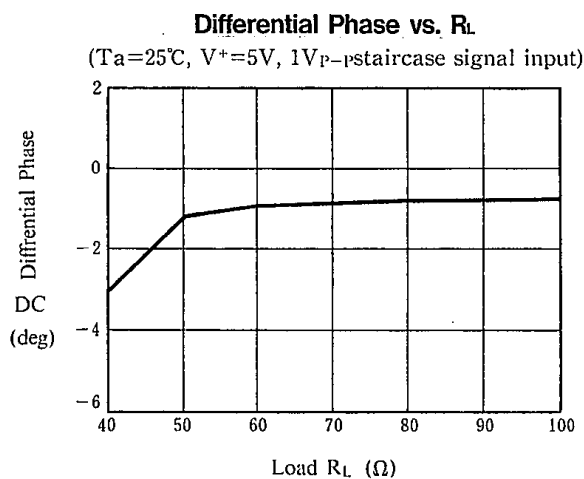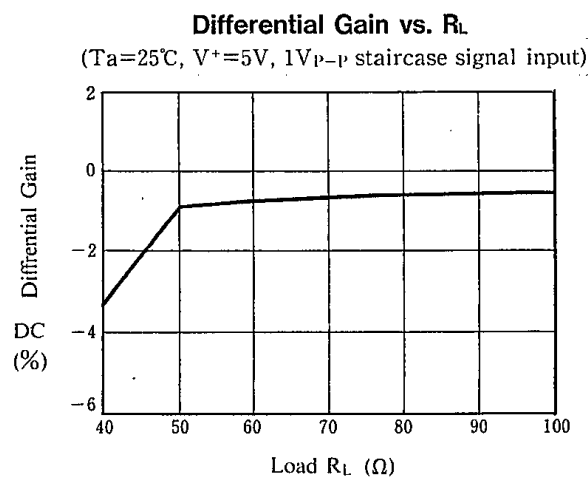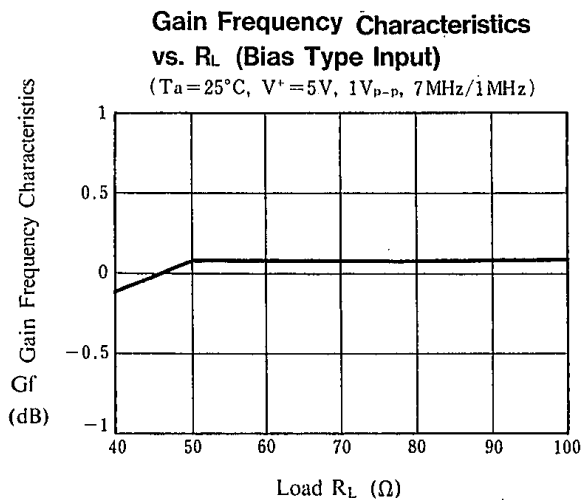

■APPLICATION

This IC requires $1\text{M}\Omega$ resistance between INPUT and GND pin for clamp type input since the minute current causes an unstable pin voltage.

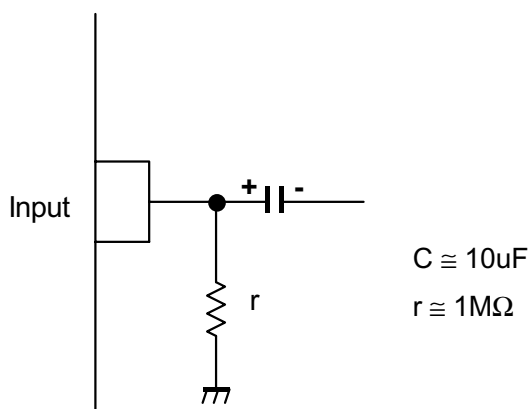

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.