

THRU-BULKHEAD RECEPTACLE.

CIR TBFP / TB

CIR TBFP

*Thru-bulkhead receptacle
with four through
mounting holes.*

Contacts supplied installed.

Includes a panel seal O-ring.



Accepts a mating plug on both sides.

For panel thickness dimensions see page 9.


CIR TB

*Thru-bulkhead receptacle.
with four threaded
mounting holes.*


(See page 10.)

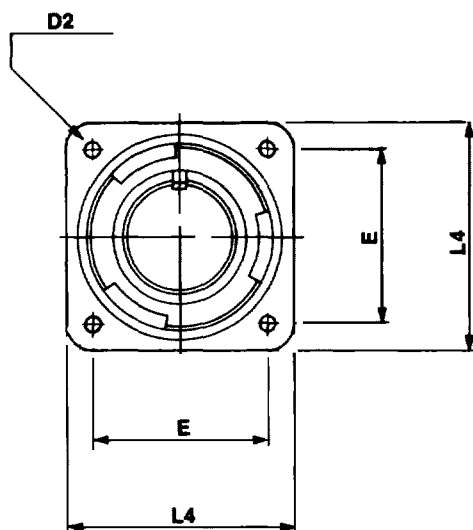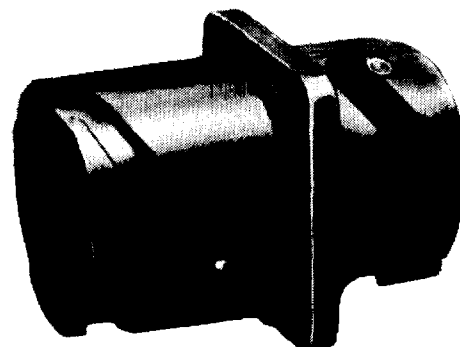

SOCKET
SIDE

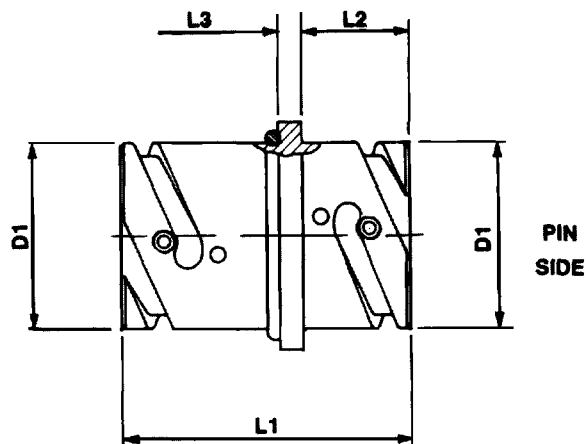

PIN
SIDE



CIR TBFP/TB

DIMENSIONS ARE IN MM.

	TBFP TB							
	D1	D2	D2	E	L1	L2	L3	L4
SHELL	+0.0	+0.1				+0.4		
SIZE	-0.15	-0.0		±0.1	±0.7	-0.0	±0.2	±0.3
10SL	18.2	3.2	M4	18.2	37.5	14.2	2.8	25.4
14S	24.6	3.2	M4	23	37.5	14.2	3.2	30
16S	27.4	3.2	M4	24.6	37.5	14.2	3.2	32.5
16	27.4	3.2	M4	24.6	51.4	19	3.2	32.5
18	30.8	3.2	M4	27	51.4	19	4	35
20	34.2	3.2	M4	29.4	51.4	19	4	38

	TBFP TB							
	D1	D2	D2	E	L1	L2	L3	L4
SHELL	+0.0	+0.1				+0.4		
SIZE	-0.15	-0.0		±0.1	±0.7	-0.0	±0.2	±0.3
22	37.4	3.2	M4	31.8	51.4	19	4	41
24	40.9	3.7	M4	34.9	51.4	20.6	4	44.5
28	46.7	3.7	M5	39.7	51.4	20.6	4	50.8
32	53.4	4.3	M5	44.5	51.4	22.2	4	57
36	59.6	4.3	M5	49.2	51.4	22.2	4	63.5
40	65.5	4.3	M5	55.5	51.4	22.2	4	69.9