
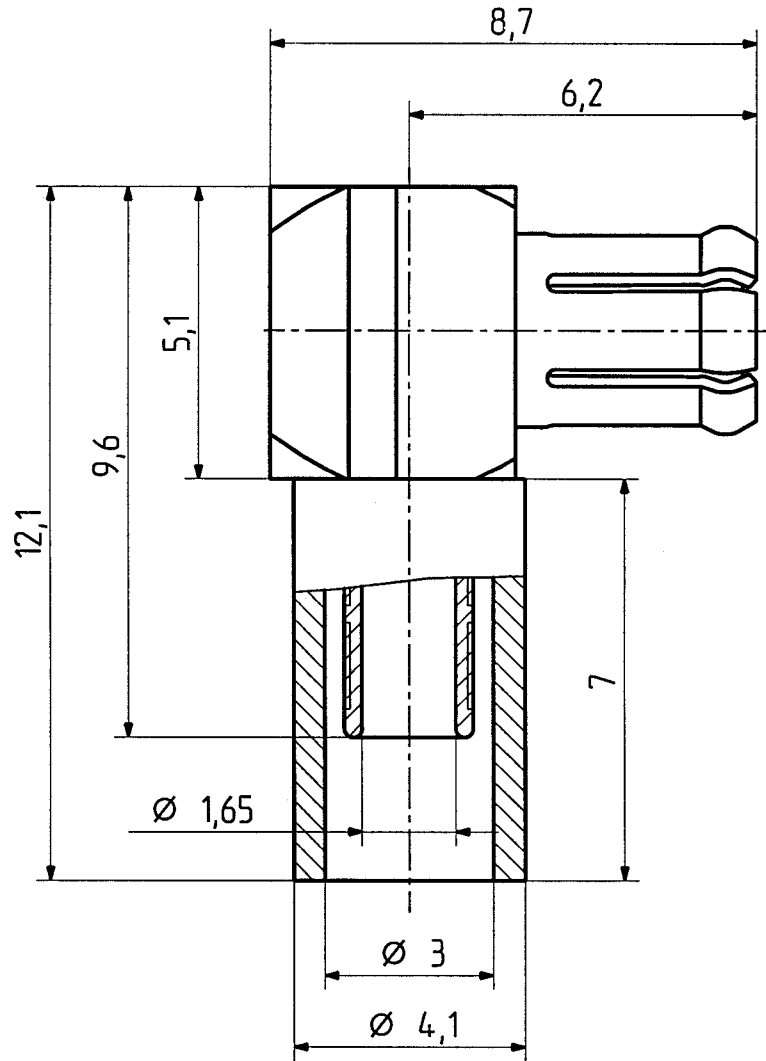
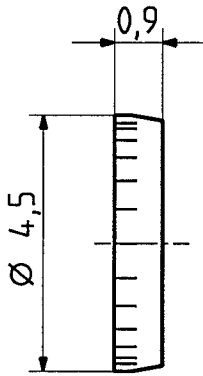
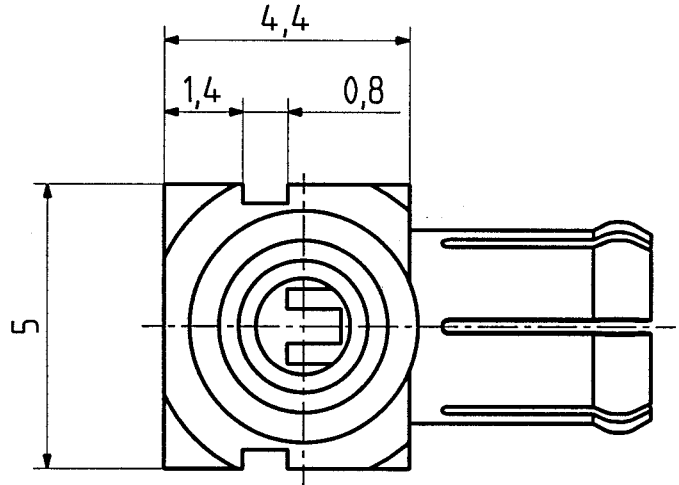



This drawing is copyright. Information contained thereon is supplied in confidence and must not be used for any other purpose than which it was supplied, or be reproduced without written permission of the owners.

type : 16 MCX-50-2-14

	date	sign
drawn	29.03.99	4540/PM
checked	30.3.99	4587/NL
approved	22.4.99	4587/NL




Diese Zeichnung ist unser geistiges Eigentum und darf ohne unsere ausdrückliche Einwilligung weder kopiert, vervielfältigt, noch Dritten oder Konkurrenzfirmen zugänglich gemacht werden.

H-S 701 448.05

scale

8:1



HUBER + SUHNER RFX

dimensions in mm

drawing number

4.13.30437

OZ drawing :

Index

b

- [RF Products](#)
- [FO Products](#)
- [Energy+Signal  
Transmission](#)
- [Polymer Solutions](#)
- .....
- Search categories
- [RF cable connectors](#)
- [RF panel connectors](#)
- [RF print connectors](#)
- [RF adaptors](#)
- [RF in-series adaptors](#)
- [RF coaxial cable](#)
- [RF low-noise cable](#)
- [RF lightning protector](#)
- [FO cable connectors](#)
- [FO adaptors](#)
- [FO cables](#)
- .....

**Article number:****Type:****SUHNER Type:****16 MCX-50-2-14 / 111 NH**[Picture](#)

Article Number: 23000445

Series: MCX

**Cable Type:**[RG 316 /U](#) , [EF 316](#) [RG 188 A/U](#)

Cable entry:

outer contact:	crimped
center contact:	soldered

**Electrical Data:**

Impedance: 50 Ω

Frequency Range: DC ... 6.00 GHz

**Material Data:****Material****Surface Plating**

Center contact:	Brass	Gold / nickel underplated
Outer contact:	Copper-Beryllium	Gold / nickel underplated
Body:	Brass	Gold / nickel underplated
Insulator:	PTFE/PFA	
Crimp Ferrule:	Copper	Gold / not nickel underplated

**General Information:**

Interface according to: IEC 60169-36\_CECC 22220

Weight: 1.2 g/0.04 oz

Packaging: Bulk 100 pcs

**Attachment:**Outline drawing: [S30437](#)Assembly Instruction: [M27102](#)