



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

D965-T
D965-R

Features

- Power Dissipation: $P_{CM}=0.75W$ @ $T_{amb}=25^{\circ}C$
- Collector Current: $I_{CM}=5A$
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Marking: D965R/T

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{CEO}	Collector-Emitter Voltage	22	V
V_{CBO}	Collector-Base Voltage	42	V
V_{EBO}	Emitter-Base Voltage	6.0	V
I_C	Collector Current, Continuous	5	A
P_D	Total Device Dissipation	750	mW
T_J	Operating Junction Temperature	-55 to +150	$^{\circ}C$
T_{STG}	Storage Temperature	-55 to +150	$^{\circ}C$

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

OFF CHARACTERISTICS


$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage* ($I_C=10mA$, $I_B=0$)	22	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=100\mu A$, $I_E=0$)	42	---	Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_E=100\mu A$, $I_C=0$)	6.0	---	Vdc
I_{CBO}	Collector Cutoff Current ($V_{CB}=20Vdc$, $I_E=0$)	---	100	nAdc
I_{EBO}	Base Cutoff Current ($V_{EB}=3.0Vdc$, $I_C=0$)	---	100	nAdc
H_{FE}	DC Current Gain ($V_{CE}=2V$, $I_C=0.15mA$) ($V_{CE}=2V$, $I_C=500mA$) ($V_{CE}=2V$, $I_C=2000mA$)	150 340 150	---	
$V_{CE(sat)}$	Collector-emitter Saturation Voltage ($I_C=3000mA$, $I_B=100mA$)	---	0.35	V

Classification of H_{FE} @ ($V_{CE}=2V$, $I_C=500mA$)

Rank	R	T
Range	340-600	560-950

NPN
Plastic-Encapsulate
Transistors

TO-92

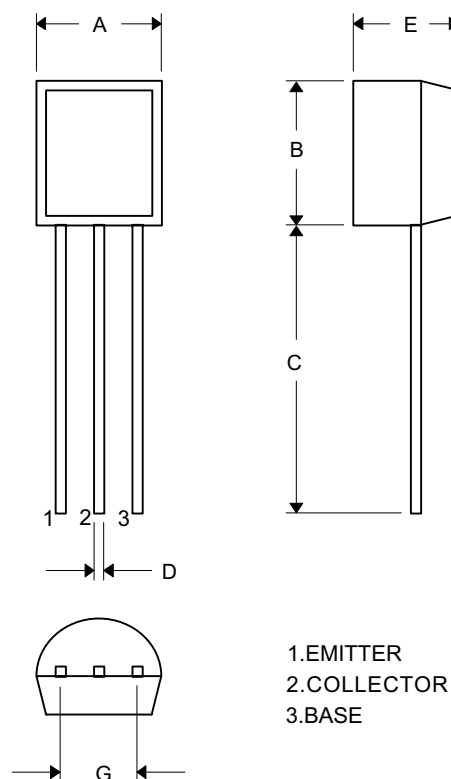

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.170	.190	4.33	4.83	
B	.170	.190	4.30	4.83	
C	.550	.590	13.97	14.97	
D	.010	.020	0.36	0.56	
E	.130	.160	3.30	3.96	
G	.010	.104	2.44	2.64	

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical,
Aerospace or Military Applications.