


SD

KO-59-02

REVISIONS

ISSUE	CHANGES
5	CN 37546 C REDRAWN JW 03/12/98

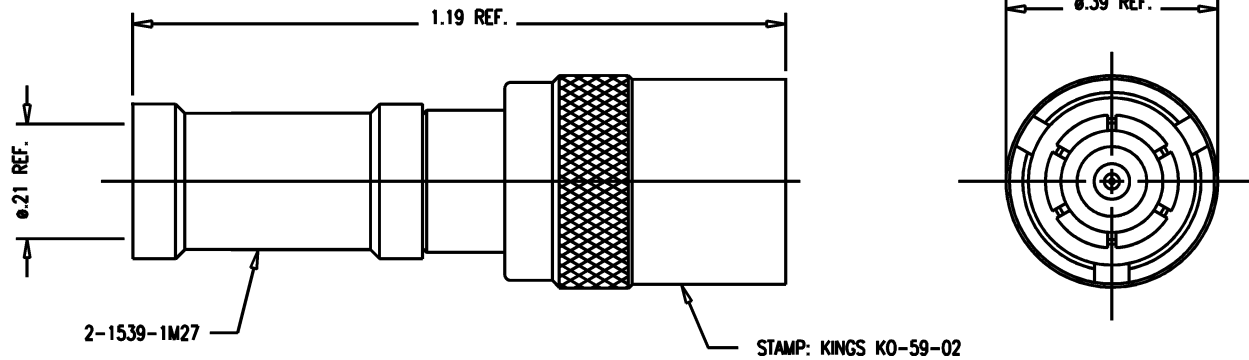

NOTES:

- FOR USE WITH RG-58, 58A, 58C & 141/U CABLES.
- FOR CABLING TRIMMING USE KTJ-75 & KTD-110.
- FOR CRIMPING USE DIE SIZE 86.
- FOR CABLING INSTRUCTIONS SEE CP-429.
- MARK PACKAGE: KINGS KO-59-02, YRWK(DATE CODE)
- MATERIALS:
 GASKET: SILICONE RUBBER, ZZ-R-765
 INSULATOR: TEFLON, ASTM-D-4894
 SPRING: STAINLESS STEEL WIRE
 OUTER CONTACT: BERYLLIUM COPPER, ASTM-B-196
 ALL OTHER PARTS: BRASS, ASTM-B16
- FINISHES:
 CENTER CONTACT: GOLD PLATE PER, MIL-G-45204
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 50 OHM.
 FREQUENCY RANGE: DC TO 10 GHz
 WORKING VOLTAGE: 500 VOLTS RMS

K05902S

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: BOEING

PLUG, TPS

DRAWN	HFE	DATE	06/21/68
-------	-----	------	----------

DESIGN	PETE	DATE	06/26/68
--------	------	------	----------

APPR.		DATE	
-------	--	------	--

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KO-59-02

SD