


Female “F” Splice

Female Splice

Part Number	(A)	(B)	(C)	Accepts
GF-81	.72	.26	1.06	.020 - .047
GF-81-A	.48	.26	.81	.020 - .047
GF-81-S	.73	.26	1.13	.020 - .047


Spring Contact

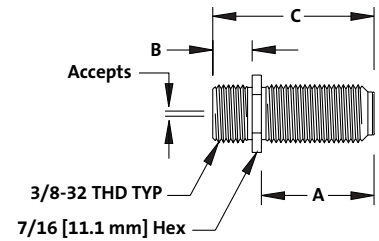

Female Splice

Part Number	(A)	(B)	(C)	Accepts
GF-81-TS	.510	.510	1.108	.020 - .047
GF-81-HP ¹	.510	.510	1.108	.020 - .051

Spring Contact

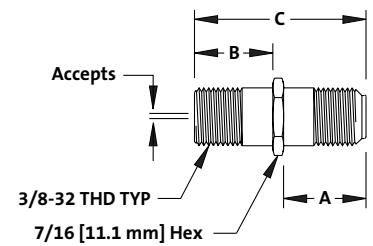


¹High Performance Spring Contact for Superior Return Loss

Female Splice

Part Number	(A)	(B)	(C)	Accepts
GF-81-HP-6	.470	.255	.785	.030 - .040
GF-81-HP-59	.470	.255	.785	.025 - .032

Spring Contact

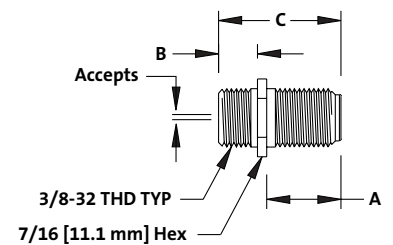

High Performance Spring Contact for Superior Return Loss

Female Splice

Part Number	Accepts
GF-81-A-SP	.020 - .047

Spring Contact

