DASH NO.	M CODE	MADE FROM

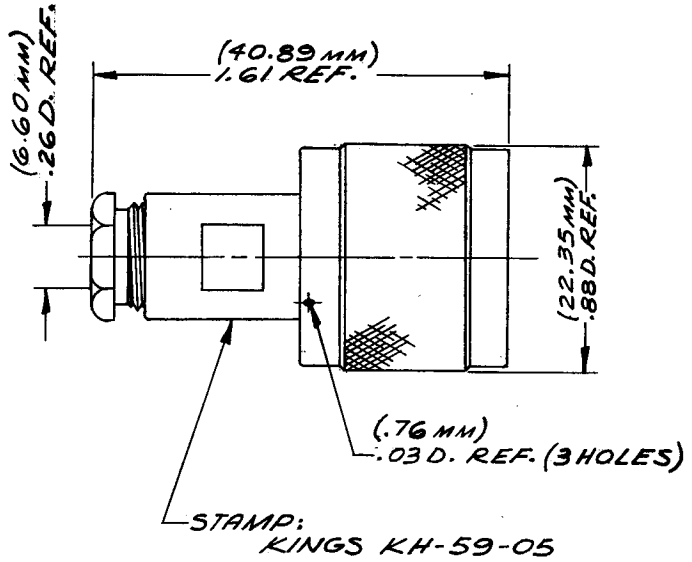

KH-59-05

GSD

NOTES:
1. FOR USE RG-59, 62 & 210/U CABLE GROUPS.
2. MATERIALS:
CABLE POSITIONING INSULATOR - TEFLON, L-P-403.
INSULATOR - REXOLITE, L-P-516.
GASKETS-SILICONE RUBBER, Z Z-R-765.
OUTER CONTACT - BERYLLIUM COPPER, QQ-C-530.
C-RING - PHOSPHOR BRONZE, QQ-B-750.
ALL OTHER METAL PARTS - BRASS, QQ-B-626.
3. FINISHES:
ALL METAL PARTS - SILVER PLATE, PER, QQ-S-365.
4. ELETRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE - 50Ω
WORKING VOLTAGE - 1500 VOLTS.
FREQUENCY RANGE - DC TO 4 GHZ.

UNLESS OTHERWISE SPECIFIED:
1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010
3 PLACE DECIMALS ± .004 ANGLES ± 0°30'
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS, BREAK SHARP EDGES .006 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.
6. ALL PLATING IN ACCORDANCE WITH KER 10004.

REVISIONS

ISSUE	CHANGES

GSD

SCALE: 2:1

APPROX. SURFACE AREA:

USED ON:

REF:

HN PLUG

DRAWN [signature] DATE 30SEP82

APPR. MJB DATE 15 OCT 82

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KH-59-05