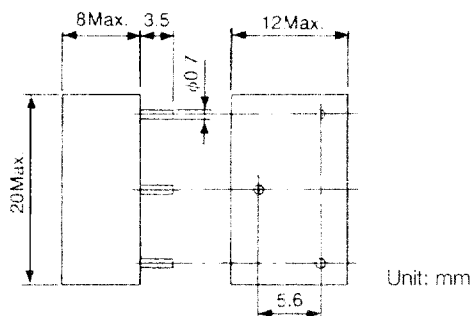



DUP3*For 25 channel***Features**

- No adjustment required
- 3-terminal structure for easy mounting
- Unitary structure helps to prevent interference between transmission and reception circuits.
- Where necessary, multilayer connection can be used to improve attenuation.

Applications

- Used in transmitter output filter of receiver ANT/RF in common antenna devices of cordless telephones for the US market

STANDARD FILTERS SELECTION GUIDE

	BASE SET	HAND SET
ANT-RX	B803D-1005RX	H803D-1002RX
TX-ANT	B803D-1003TX	H803D-1001TX

Electrical Characteristics**BASE SET**

	for 25 channel	
	43.72 ~ 46.97	48.76 ~ 49.99
ANT-RX	30dB Min.	5dB Max.
TX-ANT	30dB Max.	30dB Min.
TX-RX	30dB Min.	

HAND SET

	for 25 channel	
	43.72 ~ 46.97	48.76 ~ 49.99
ANT-RX	5dB Max.	30dB Min.
TX-ANT	30dB Min.	5dB Max.
TX-RX		30dB Min.