


# FS5UM-06

HIGH-SPEED SWITCHING USE



## FS5UM-06



- ∧ 10V DRIVE
- ∧  $V_{DSS}$  ..... 60V
- ∧  $r_{DS(ON)}$  (MAX) .....  $0.16\Omega$
- ∧  $I_D$  ..... 5A
- ∧ Integrated Fast Recovery Diode (TYP.) ..... 45ns

## OUTLINE DRAWING

Dimensions in mm

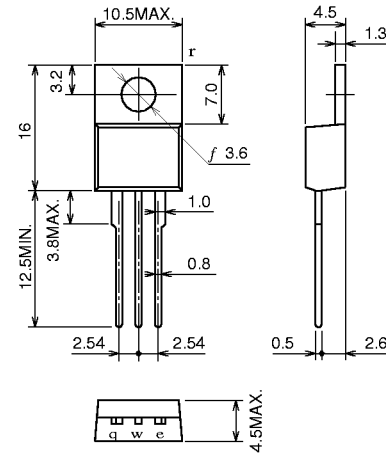

TO-220

## APPLICATION

Motor control, Lamp control, Solenoid control  
DC-DC converter, etc.





## MAXIMUM RATINGS (Tc = 25°C)

Symbol	Parameter	Conditions	Ratings	Unit
$V_{DSS}$	Drain-source voltage	$V_{GS} = 0V$	60	V
$V_{GSS}$	Gate-source voltage	$V_{DS} = 0V$	$\pm 20$	V
$I_D$	Drain current		5	A
$I_{DM}$	Drain current (Pulsed)		20	A
$I_{DA}$	Avalanche drain current (Pulsed)	$L = 100\mu H$	5	A
$I_S$	Source current		5	A
$I_{SM}$	Source current (Pulsed)		20	A
$P_D$	Maximum power dissipation		20	W
$T_{ch}$	Channel temperature		-55 ~ +150	°C
$T_{stg}$	Storage temperature		-55 ~ +150	°C
—	Weight	Typical value	2.0	g


**ELECTRICAL CHARACTERISTICS** ( $T_{ch} = 25^{\circ}\text{C}$ )

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
$V_{(BR)DSS}$	Drain-source breakdown voltage	$I_D = 1\text{mA}, V_{GS} = 0\text{V}$	60	—	—	V
$I_{GSS}$	Gate-source leakage current	$V_{GS} = \pm 20\text{V}, V_{DS} = 0\text{V}$	—	—	$\pm 0.1$	$\mu\text{A}$
$I_{DSS}$	Drain-source leakage current	$V_{DS} = 60\text{V}, V_{GS} = 0\text{V}$	—	—	0.1	mA
$V_{GS(th)}$	Gate-source threshold voltage	$I_D = 1\text{mA}, V_{DS} = 10\text{V}$	2.0	3.0	4.0	V
$r_{DS(ON)}$	Drain-source on-state resistance	$I_D = 2\text{A}, V_{GS} = 10\text{V}$	—	0.12	0.16	$\Omega$
$V_{DS(ON)}$	Drain-source on-state voltage	$I_D = 2\text{A}, V_{GS} = 10\text{V}$	—	0.24	0.32	V
$ y_{fs} $	Forward transfer admittance	$I_D = 2\text{A}, V_{DS} = 5\text{V}$	—	4.0	—	S
$C_{iss}$	Input capacitance	$V_{DS} = 10\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}$	—	280	—	pF
$C_{oss}$	Output capacitance		—	120	—	pF
$C_{rss}$	Reverse transfer capacitance		—	35	—	pF
$t_d(on)$	Turn-on delay time	$V_{DD} = 30\text{V}, I_D = 2\text{A}, V_{GS} = 10\text{V}, R_{GEN} = R_{GS} = 50\Omega$	—	15	—	ns
$t_r$	Rise time		—	8	—	ns
$t_d(off)$	Turn-off delay time		—	18	—	ns
$t_f$	Fall time		—	9	—	ns
$V_{SD}$	Source-drain voltage	$I_S = 2\text{A}, V_{GS} = 0\text{V}$	—	1.0	1.5	V
$R_{th(ch-c)}$	Thermal resistance	Channel to case	—	—	6.25	$^{\circ}\text{C/W}$
$t_{rr}$	Reverse recovery time	$I_S = 5\text{A}, di/dt = -100\text{A}/\mu\text{s}$	—	45	—	ns


**PERFORMANCE CURVES**

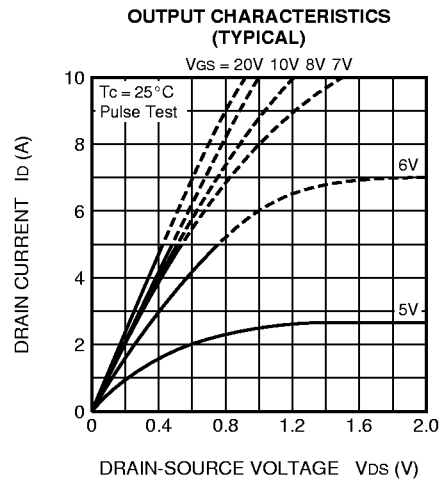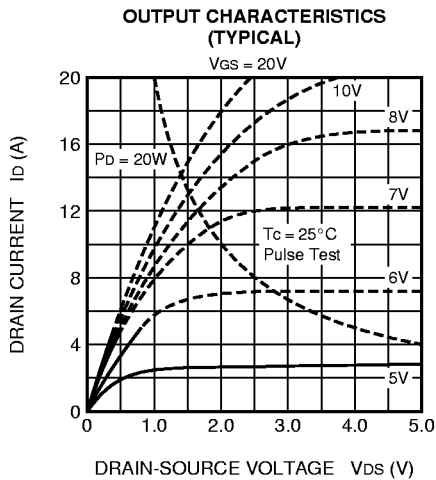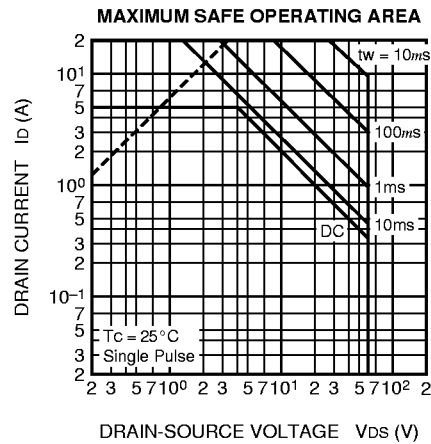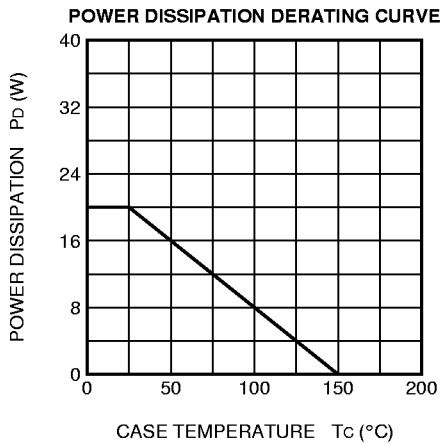


ON-STATE VOLTAGE VS. GATE-SOURCE VOLTAGE (TYPICAL)

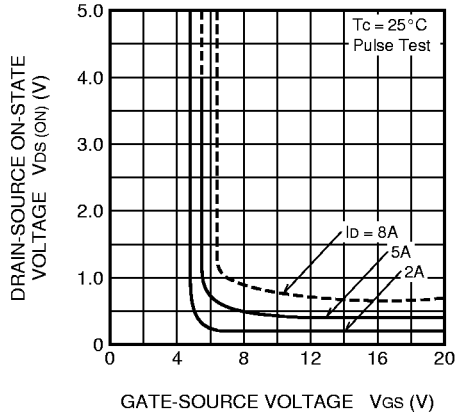


ON-STATE RESISTANCE VS. DRAIN CURRENT (TYPICAL)

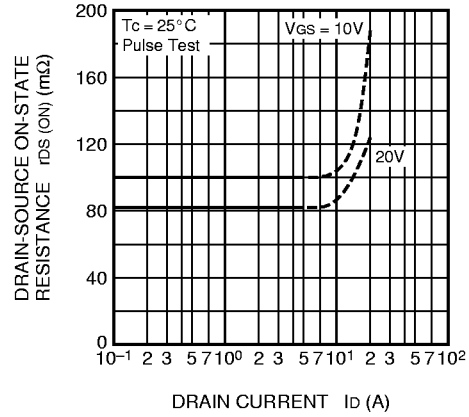


TRANSFER CHARACTERISTICS (TYPICAL)

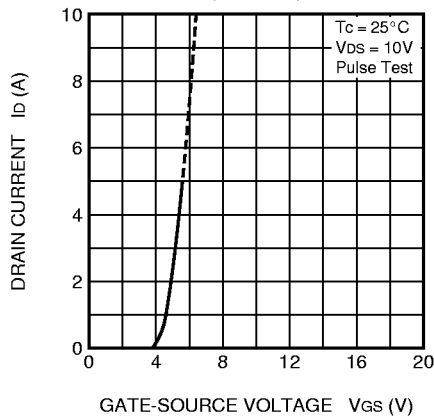

FORWARD TRANSFER ADMITTANCE VS. DRAIN CURRENT (TYPICAL)

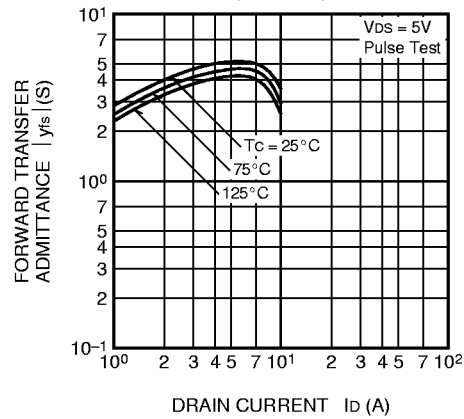

CAPACITANCE VS. DRAIN-SOURCE VOLTAGE (TYPICAL)

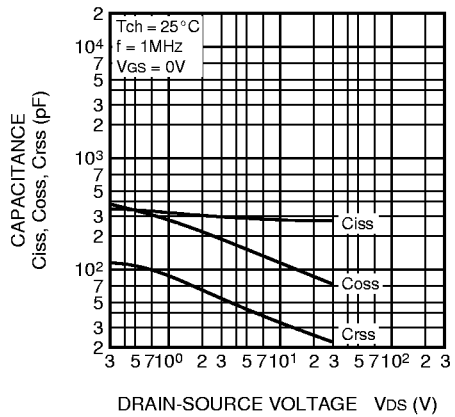

SWITCHING CHARACTERISTICS (TYPICAL)

