



LC74735W

On-Screen Display Controller

Preliminary

Overview

The LC74735W is an on-screen display CMOS IC that displays characters and patterns on a TV screen.

For QVGA display, the LC74735W supports the use of both a 12×18 dot character font and a 12×18 dot graphics font with 16 colors with a total of 512 characters and glyphs.

For WVGA display, the LC74735W supports the use of both a 24×32 dot character font and a 12×16 dot graphics font with 16 colors with a total of 512 characters and glyphs.

The LC74735W can also implement extremely varied displays by the use of an external ROM.

The LC74735W supports both QVGA (480×234) and WVGA (800×480).

Features

- Screen structure
 - Main:
 - QVGA mode: 40 characters × 13 lines (up to 520 characters) on a QVGA panel
 - WVGA mode: 33 characters × 15 lines (up to 495 characters) on a WVGA panel
 - Wallpaper display screen: Permanent repetition of a 2×2 (horizontal × vertical) character pattern
- Character structure
 - QVGA mode:
 - 12 dots (horizontal) × 18 dots (vertical): Character display
 - 12 dots (horizontal) × 18 dots (vertical): Graphic glyph display
 - WVGA mode:
 - 24 dots (horizontal) × 32 dots (vertical): Character display
 - 12 dots (horizontal) × 16 dots (vertical): Graphic glyph display (1 pixel: 2×2 dots)
- Character display clock: About 9 MHz — QVGA with an LC oscillator
33.2 MHz (maximum: 40 MHz) WVGA with an external clock signal input
- *: The ROM image is known when QVGA or WVGA mode is specified.
- Number of characters: 512 (internal)
Up to 2048 characters when an external 16-bit 4M ROM is used.
- Character sizes: Four horizontal sizes (1×, 2×, 3×, and 4×)
Four vertical sizes (1×, 2×, 3×, and 4×)
The character size is specified in line units.
- Display start positions: 512 positions in the horizontal direction and 256 positions in the vertical direction.
QVGA mode - WVGA mode
Setting units: Horizontal: 1 dot - 2 dots (In screen units)
Vertical: 1 dot - 2 dots (In screen units)
- Display functions
 - Blinking specification (In character units)
Period: 1/64, 1/32, and 1/16 of the vertical sync signal (In screen units)
Duty: Fixed at 50%
 - Box (raised or recessed) display
Raised/depressed specification (In character units)
Left: Off/on specification (In character units)
Right: Off/on specification (In character units)
Top: Off/on specification (In character units)
Bottom: Off/on specification (In character units)
 - Border specification (In line units): Only valid with glyphs from the character font.

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co.,Ltd. Semiconductor Company


TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

- Color specification
 - Character
 - Character color (In character units): 1 of 16 colors can be specified.
 - Character background color (In character units): 1 of 16 colors can be specified.
 - Border color (In line units): 1 of 16 colors can be specified.
- Graphic
 - 16 types can be specified by ROM data
- Box color (line units) : 1/16 colors
- Background color (screen units) : 1/16 colors
- Color table (palette)
 - Sixteen colors can be selected from a set of 512 colors (One of which is specified to be transparent.)
 - Number of color tables: 2. This allows up to 32 colors to be displayed at the same time.
- Wallpaper screen (Graphics glyphs only)
 - Wallpaper display: Repeated display under the main screen (2 characters horizontally by 2 characters vertically).
 - Sprite character display: Displayed above the main screen (2 characters horizontally by 2 characters vertically)
- Output
 - QVGA
 - Analog RGB output
 - BLK (OSD display period signal)
 - WVGA
 - Digital RGB output (3 bits per color)
 - BLK (OSD display period signal)
- Package: SQFP80
- Voltage: 3.3 V

Package Dimensions

unit: mm


3220-SQFP80

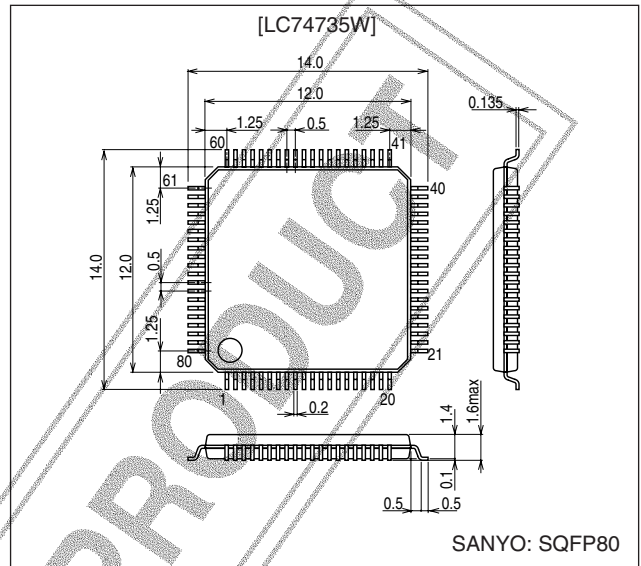

DISCONTINUED PRODUCT

LC74735W

Pin Assignment

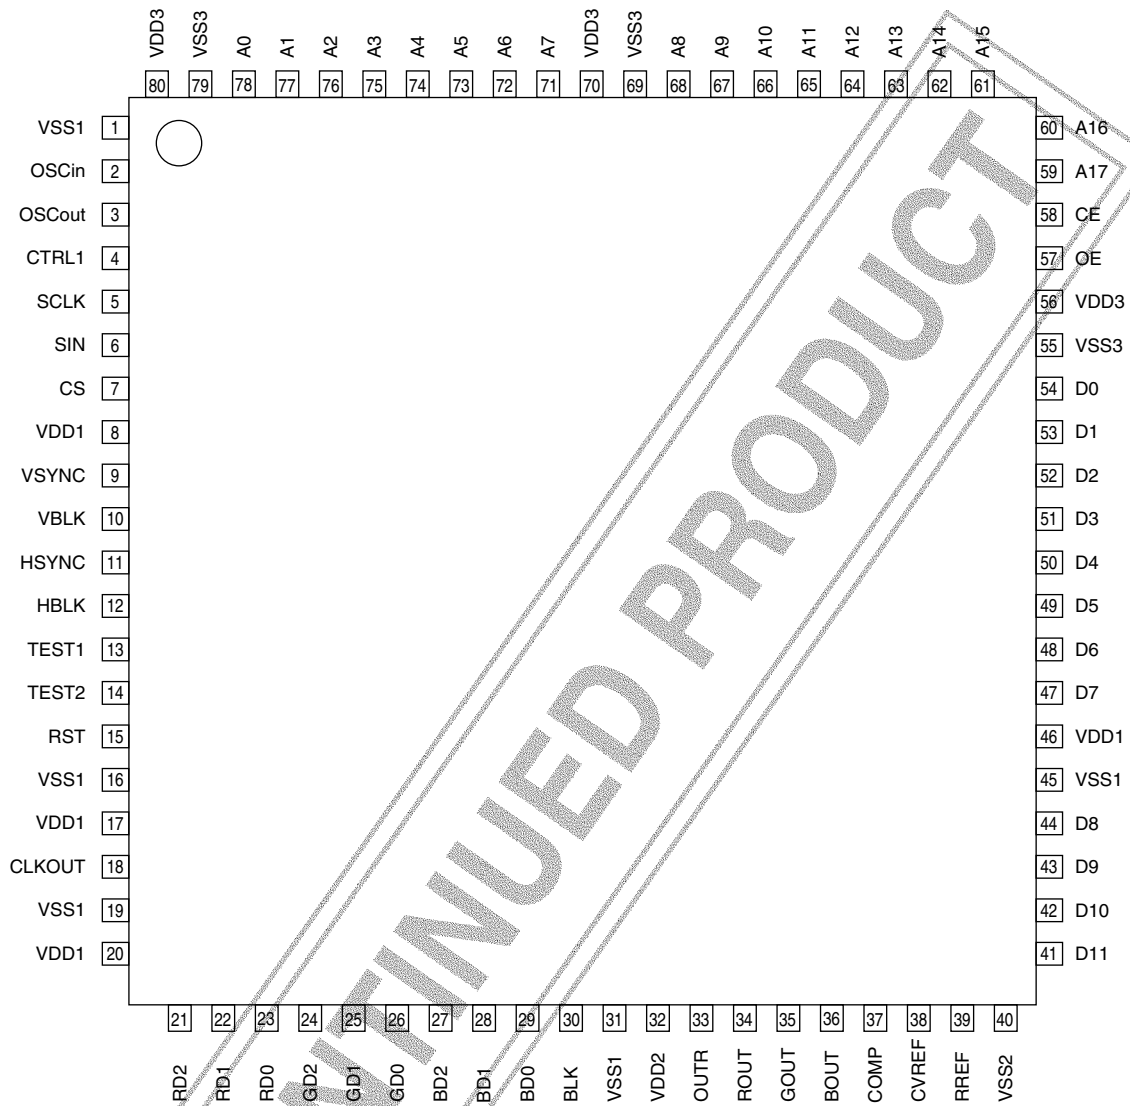

LC74735W

Pin Functions

Pin No.	Symbol	Type	Functional description
1	V _{SS1}	Ground	Digital system ground
2	OSCI _{in}	LC oscillator	Connections for the character output dot clock generator oscillator coil and capacitor. May also be used for external clock input.
3	OSCO _{ut}		
4	CTRL1	OSCI _{in} oscillator input control	Switches between external clock input mode and LC oscillator mode. Low: LC oscillator, high: external clock input MORE+
5	SCLK	Clock input	Clock input for the serial data input system MORE+ (This input has hysteresis characteristics.)
6	SIN	Data input	Serial data input MORE+ (This input has hysteresis characteristics.)
7	\overline{CS}	Enable input	Enable input for the serial data input system. Serial data input is enabled when this pin is low. MORE+ (This input has hysteresis characteristics.)
8	VDD1	Power supply (+3.3 V)	Digital system power supply: +3.3 V
9	VSYNC	Vertical sync signal input	Vertical sync signal input MORE+ (This input has hysteresis characteristics.)
10	VBLK	Vertical blanking signal input	Vertical blanking signal input MORE+ (This input has hysteresis characteristics.)
11	HSYNC	Horizontal sync signal input	Horizontal sync signal input MORE+ (This input has hysteresis characteristics.)
12	HBLK	Horizontal blanking signal input	Horizontal blanking signal input MORE+ (This input has hysteresis characteristics.)
13	TEST1	Test mode control 1	Test mode control 1 Low: normal operation, high: test mode MORE+
14	TEST2	Test mode control 2	Test mode control 2 Low: normal operation, high: test mode (scan mode) MORE+
15	RST	Reset input	System reset input MORE+ (This input has hysteresis characteristics.)
16	VSS1	Ground	Digital system ground
17	VDD1	Power supply (+3.3 V)	Digital system power supply: +3.3 V
18	CLKOUT	Clock output	Clock output
19	VSS1	Ground	Digital system ground
20	VDD1	Power supply (+3.3 V)	Digital system power supply: +3.3 V
21	RD2	Rout output: bit 2	Rout output This is a 3-bit digital output with values from 000 to 111.
22	RD1	Rout output: bit 1	
23	RD0	Rout output: bit 0	
24	GD2	Gout output: bit 2	Gout output This is a 3-bit digital output with values from 000 to 111.
25	GD1	Gout output: bit 1	
26	GD0	Gout output: bit 0	
27	BD2	Bout output: bit 2	Bout output This is a 3-bit digital output with values from 000 to 111.
28	BD1	Bout output: bit 1	
29	BD0	Bout output: bit 0	
30	BLK	Blanking signal output	This signal indicates the OSD display period.
31	VSS1	Ground	Digital system ground
32	VDD2	Power supply (+3.3 V)	Analog system power supply: +3.3 V
33	Out _r	out _r output: analog	Output. Connect a resistor R _o (67 Ω) to this pin.
34	Rout	Rout output: analog	D/A converter (3 bits) output. Connect a resistor R _o (200 Ω) to this pin.
35	Gout	Gout output: analog	D/A converter (3 bits) output. Connect a resistor R _o (200 Ω) to this pin.
36	Bout	Bout output: analog	D/A converter (3 bits) output. Connect a resistor R _o (200 Ω) to this pin.
37	CCOMP	Phase correction capacitor connection	Capacitor connection: 1.5 μF
38	CVREF	Reference voltage output	Capacitor connection: 0.1 μF
39	RREF	Reference resistor connection	Resistor connection: r _o , 1540 Ω
40	VSS2	Ground	D/A converter ground

Continued on next page.

LC74735W

Continued from preceding page.

Pin No.	Symbol	Type	Functional description
41	D11	Data input 11	ROM data input 11. MORE+
42	D10	Data input 10	ROM data input 10. MORE+
43	D9	Data input 9	ROM data input 9. MORE+
44	D8	Data input 8	ROM data input 8. MORE+
45	VSS1	Ground	Digital system ground
46	VDD1	Power supply (+3.3 V)	Digital system power supply: +3.3 V
47	D7	Data input 7	ROM data input 7. MORE+
48	D6	Data input 6	ROM data input 6. MORE+
49	D5	Data input 5	ROM data input 5. MORE+
50	D4	Data input 4	ROM data input 4. MORE+
51	D3	Data input 3	ROM data input 3. MORE+
52	D2	Data input 2	ROM data input 2. MORE+
53	D1	Data input 1	ROM data input 1. MORE+
54	D0	Data input 0	ROM data input 0. MORE+
55	VSS3	Ground	External ROM output system ground
56	VDD3	Power supply (+3.3 or +5.5 V)	External ROM output system power supply
57	\overline{OE}	Output enable	ROM output enable output. This is an active low output.
58	\overline{CE}	Chip enable	ROM chip enable output. This is an active low output.
59	A17	Address output 17	ROM address output 17
60	A16	Address output 16	ROM address output 16
61	A15	Address output 15	ROM address output 15
62	A14	Address output 14	ROM address output 14
63	A13	Address output 13	ROM address output 13
64	A12	Address output 12	ROM address output 12
65	A11	Address output 11	ROM address output 11
66	A10	Address output 10	ROM address output 10
67	A9	Address output 9	ROM address output 9
68	A8	Address output 8	ROM address output 8
69	VSS3	Ground	External ROM output system ground
70	VDD3	Power supply (+3.3 or +5.5 V)	External ROM output system power supply
71	A7	Address output 7	ROM address output 7
72	A6	Address output 6	ROM address output 6
73	A5	Address output 5	ROM address output 5
74	A4	Address output 4	ROM address output 4
75	A3	Address output 3	ROM address output 3
76	A2	Address output 2	ROM address output 2
77	A1	Address output 1	ROM address output 1
78	A0	Address output 0	ROM address output 0
79	VSS3	Ground	External ROM output system ground
80	VDD3	Power supply (+3.3 or +5.5 V)	External ROM output system power supply

DISCONTINUED PRODUCT

Specifications
Maximum Ratings

Parameter	Symbol	Conditions	Ratings		Unit
			min	max	
Supply voltage	V _{DD1}	V _{DD1} , V _{DD2}	V _{SS} - 0.3	V _{SS} + 4.6	V
	V _{DD3}	V _{DD3} (A0 to A17, CE, OE)	V _{SS} - 0.3	V _{SS} + 6.0	V
Input voltage	V _{IN}	All input pins	V _{SS} - 0.3	V _{DD1} + 0.3	V
Output voltage	V _{OUT1}	RD2:0, GD2:0, BD2:0, and BLK outputs	V _{SS} - 0.3	V _{DD1} + 0.3	V
	V _{OUT2}	A0 to A17, OE, CE outputs	V _{SS} - 0.3	V _{DD1} + 0.3	V
Maximum power dissipation	P _{dmax}		—	230	mW
Operating temperature	T _{opg}		-30	+85	°C
Storage temperature	T _{stg}		-40	+125	°C

Recommended Operating Conditions

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Supply voltage	V _{DD1}	V _{DD1} , V _{DD2}	3.0	3.3	3.6	V
	V _{DD3}	V _{DD3}	3.0	3.3	5.5	V
High-level input voltage	V _{IH1}	CTRL1, TEST1, TEST2	0.7 V _{DD1}	—	5.5	V
	V _{IH2}	SCLK, SIN, CS, VSYNC, HSYNC, \overline{RST}	0.8 V _{DD1}	—	5.5	V
	V _{IH3}	D0 to D11	0.7 V _{DD1}	—	5.5	V
Low-level input voltage	V _{IL1}	CTRL1, TEST1, TEST2	V _{SS} - 0.3	—	0.3 V _{DD1}	V
	V _{IL2}	SCLK, SIN, CS, VSYNC, HSYNC, \overline{RST}	V _{SS} - 0.3	—	0.2 V _{DD1}	V
	V _{IL3}	D0 to D11	V _{SS} - 0.3	—	0.3 V _{DD1}	V
Oscillator frequency	F _{OSC1}	OSCin and OSCout oscillator pins (LC oscillator)	—	10	—	MHz
	F _{OSC2}	OSCin, V _{DD1} = 3.3 V	—	33	40	MHz
External clock input	V _{IN1}	V _{DD1} = 3.3 V, CTRL1 = high	0.5	—	3.3	V _{p-p}
D/A (3 bit 3 ch)	V _{refda}	Reference voltage	—	1.1	—	V
	R _{fda}	Output load resistance \overline{ROUT} , GOUT, and BOUT	—	200	—	Ω
	R _{fbda}	Output load resistance \overline{OUTR}	—	67	—	Ω
	R _{ref}	Reference load resistor, RREF	—	1540	—	Ω

DISCONTINUED PRODUCT

LC74735W

Electrical Characteristics at Ta = -30 to +85°C, V_{DD} = 3.3 V unless otherwise specified.

Parameter	Symbol	Pin	Conditions	Ratings			Unit
				min	typ	max	
High-level output voltage	V _{OH1}	RD2:0, GD2:0, BD2:0, and BLK outputs	V _{DD1} = 3.0 V I _{OH1} = -8 mA	V _{DD1} - 0.8	—	—	V
	V _{OH2}	A0:17, OE, and CE	V _{DD3} = 3.0 V I _{OH2} = -8 mA	V _{DD3} - 0.8	—	—	V
	V _{OH3}	A0:17, OE, and CE	V _{DD3} = 4.5 V I _{OH3} = -8 mA	V _{DD3} - 0.8	—	—	V
Low-level output voltage	V _{OL1}	RD2:0, GD2:0, BD2:0, and BLK outputs	V _{DD1} = 3.0 V I _{OL1} = 8 mA	—	—	0.4	V
	V _{OL2}	A0:17, OE, and CE	V _{DD3} = 3.0 V I _{OL2} = 8 mA	—	—	0.4	V
	V _{OL3}	A0:17, OE, and CE	V _{DD3} = 4.5 V I _{OL3} = 8 mA	—	—	0.4	V
Input current	I _{IH1}	CTRL1, TEST1, TEST2, SCLK, SIN, CS, VSYNC, HSYNC, RST	V _{IN} = V _{DD1}	—	—	10	μA
	I _{IH2}	D0:11	V _{IN} = V _{DD3}	—	—	10	μA
	I _{IL1}	CTRL1, TEST1, TEST2, SCLK, SIN, CS, VSYNC, HSYNC	V _{IN} = V _{SS}	-10	—	—	μA
	I _{IL2}	D0:11	V _{IN} = V _{SS}	-10	—	—	μA
Operating current drain	I _{DD1}	V _{DD1}	All outputs open OSCin: 40 MHz	—	—	37	mA
	I _{DD2}	V _{DD2}	D/A on	—	—	22	mA
	I _{DD3}	V _{DD3}		—	—	20	mA
D/A	CLK	Clock frequency		—	—	20	MHz
	V _{max}	Maximum output voltage	V _{DD2} = 3.3 V	—	1	—	V
	V _{min}	Minimum output voltage	V _{DD2} = 3.3 V	—	0	—	V

DISCONTINUED PRODUCT

Timing Characteristics

OSD Write (See figure 1.) at Ta = -30 to +85°C, VDD1 = 3.3 ± 0.3 V

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Minimum input pulse width	tw (sclk)	SCK	200	—	—	ns
	tw (cs)	$\overline{\text{CSB}}$ (The period $\overline{\text{CS}}$ is high)	1	—	—	μs
Data setup time	tsu (cs)	$\overline{\text{CSB}}$	200	—	—	ns
	tsu (sin)	SI	200	—	—	ns
Data hold time	th (cs)	$\overline{\text{CSB}}$	2	—	—	μs
	th (sin)	SI	200	—	—	ns
One word write time	tword	The time to write 8 bits of data	4.2	—	—	μs
	twt	RAM data write time	1	—	—	μs

Supplementary Materials


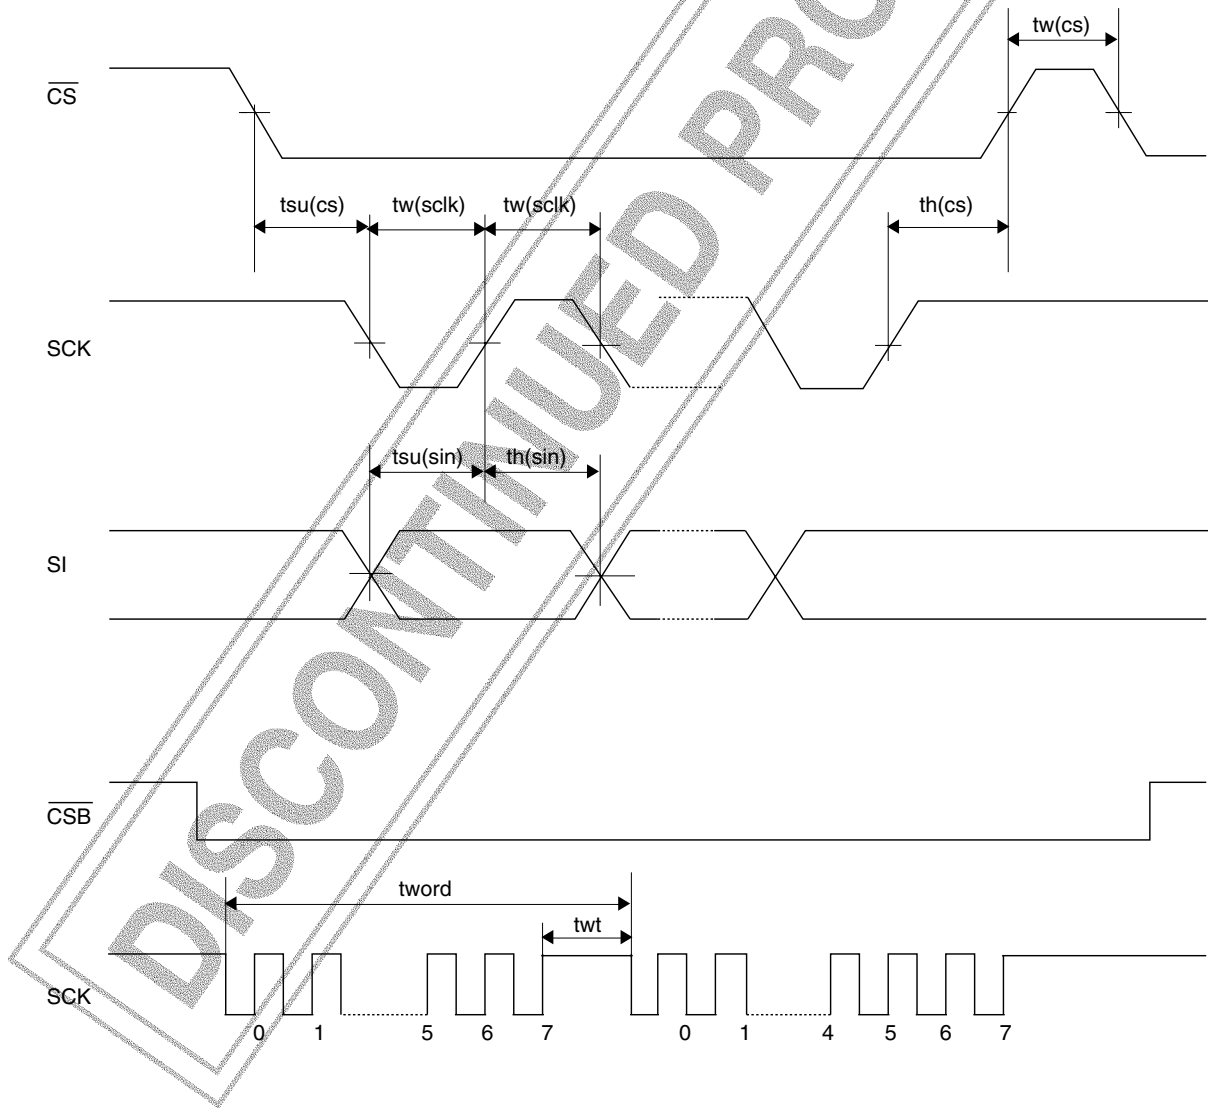


Figure 1 OSD Serial Data Input Timing

LC74735W System Block Diagram

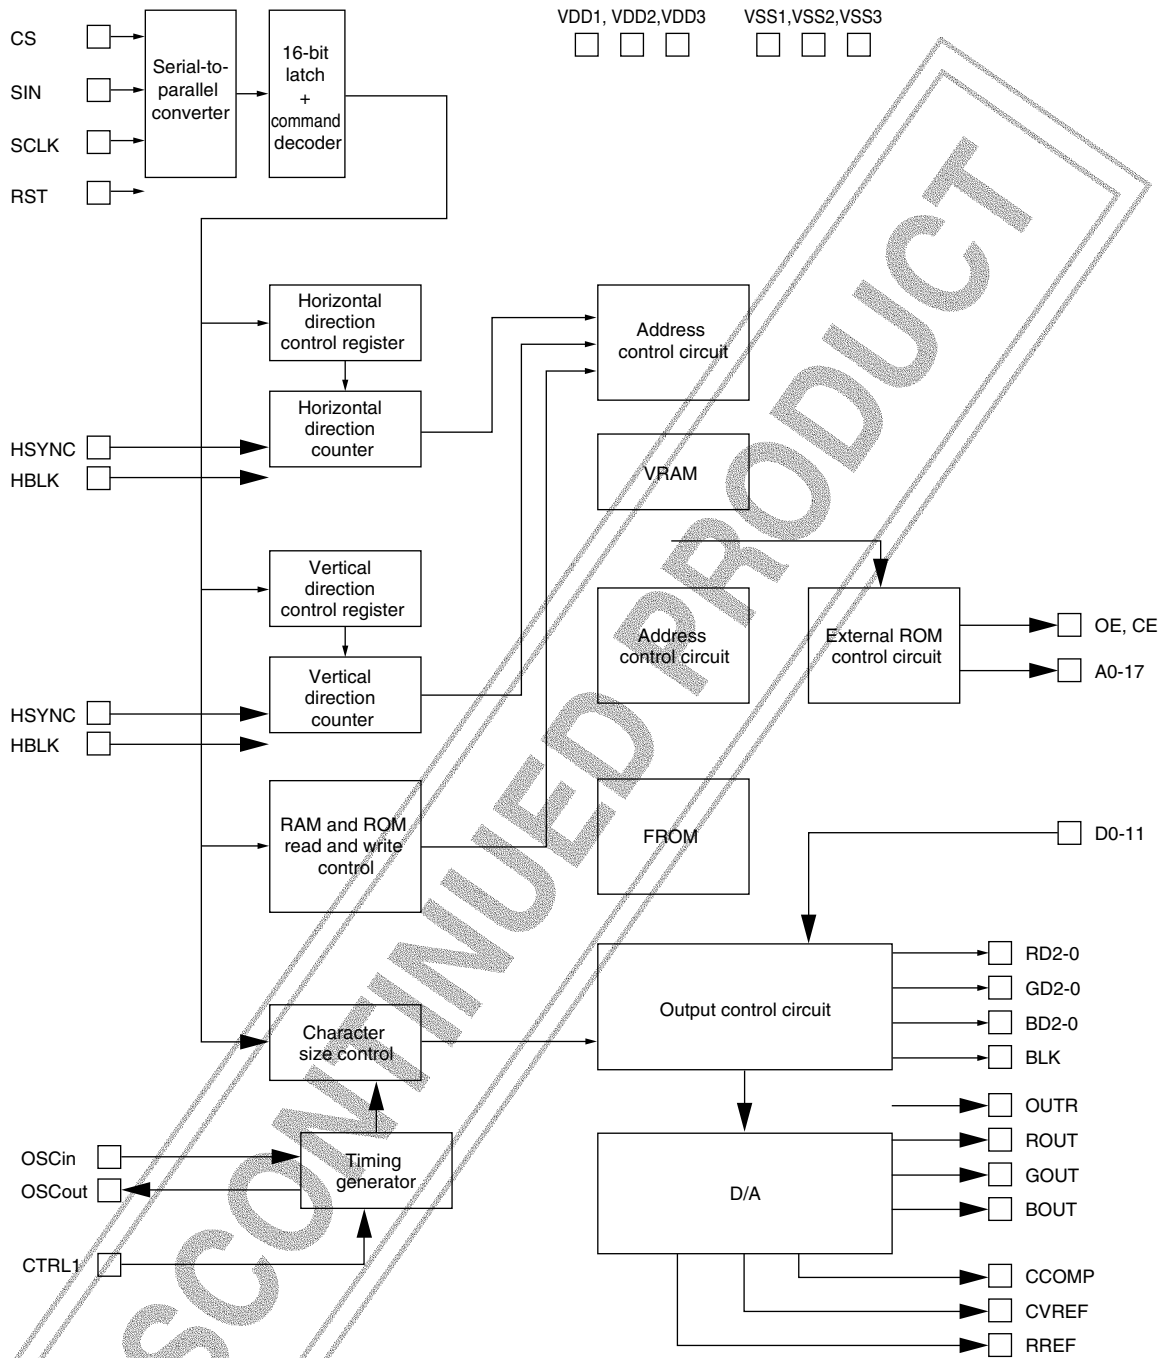

DISCONTINUED PRODUCT

Display Control Commands

The display control commands have serial input format that consists of 8-bit units transmitted LSB first. A command consists of a command identification code in the first byte and data in the second and following bytes. Both a first byte and a second byte (16 bits) must be transmitted for each command. Commands 10, 11, and 71 set the IC to continuous write mode. (Continuous write mode is cleared by setting the CS pin high.)

Display Control Command Table

Command	First byte								Second byte								
	Command identification code				Data				Data								
	7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0	
COMMAND00 (Write address) Main	1	0	0	0	0	0	V3	V2	V1	V0	H5	H4	H3	H2	H1	H0	
COMMAND01 (Write address) Sub (Wallpaper)	1	0	0	0	0	1	0	0	0	SV0	0	0	0	0	0	SH0	
Command 10 (Character write) Main	1	0	0	1	0	0	RM2	RM1(1)	0	0	at	BXS	BXL	BXR	BXU	BXD	
									(2)	CB3	CB2	CB1	CB0	CC3	CC2	CC1	CC0
									(3)	0	0	CT0	I/E	M/G	C10	C9	C8
									(4)	C7	C6	C5	C4	C3	C2	C1	C0
Command 11 (Character write) Sub (Wallpaper)	1	0	0	1	0	1	RM2	RM1(1)	0	0	0	0	0	0	0	0	
									(2)	0	0	0	0	0	0	0	0
									(3)	0	0	CT0	I/E	M/G	C10	C9	C8
									(4)	C7	C6	C5	C4	C3	C2	C1	C0
COMMAND20 (System control)	1	0	1	0	0	0	0	0	TSTMD2	TSTMD1	Q/W2	Q/W1	SYSRST	CTERS	SRMERS	MRMERS	
COMMAND21 (Display control)	1	0	1	0	0	0	0	1	LCSOFF	BK1	BK0	SBG1	SBG0	DSPBG	DSPGS	DSPGM	
COMMAND22 (I/O polarity control)	1	0	1	0	0	0	1	0	BLD1	BLO0	BLOP	BLO1	BLO0	CKP	VIP	HIP	
COMMAND23 (Screen background color)	1	0	1	0	0	0	1	1	0	0	BGCT1	BGCT0	BGC3	BGC2	BGC1	BGC0	
COMMAND24 (I/O polarity control 2)	1	0	1	0	0	1	0	0	DSPMD1	DSPMD0	DASEL	VBLKON	HBLKON	CKOP	VPB	HPB	
COMMAND25 (Output control 3)	1	0	1	0	0	1	0	1	0	0	0	OTM2	OTM1	OTM0	QRM1	QRM0	
COMMAND30 (Vertical display start position: main)	1	0	1	1	0	0	0	0	VPM7	VPM6	VPM5	VPM4	VPM3	VPM2	VPM1	VPM0	
COMMAND31 (Horizontal display start position: main)	1	0	1	1	0	0	1	HPM8	HPM7	HPM6	HPM5	HPM4	HPM3	HPM2	HPM1	HPM0	
COMMAND32 (Vertical display start position: sub)	1	0	1	1	0	1	0	0	VPS7	VPS6	VPS5	VPS4	VPS3	VPS2	VPS1	VPS0	
COMMAND33 (Horizontal display start position: sub)	1	0	1	1	0	1	1	HPS8	HPS7	HPS6	HPS5	HPS4	HPS3	HPS2	HPS1	HPS0	
COMMAND34 (Vertical display start position: screen)	1	0	1	1	1	0	0	0	VPG7	VPG6	VPG5	VPG4	VPG3	VPG2	VPG1	VPG0	
COMMAND35 (Horizontal display start position: screen)	1	0	1	1	1	0	1	HPG8	HPG7	HPG6	HPG5	HPG4	HPG3	HPG2	HPG1	HPG0	
COMMAND40 (Character size control)	1	1	0	0	0	0	0	0	0	0	0	0	SZV1	SZV0	SZH1	SZH0	
COMMAND41 (Character size control: line setting U)	1	1	0	0	0	1	0	0	LSZ7	LSZ6	LSZ5	LSZ4	LSZ3	LSZ2	LSZ1	LSZ0	
COMMAND42 (Character size control: line setting D)	1	1	0	0	1	0	0	0	LSZ15	LSZ14	LSZ13	LSZ12	LSZ11	LSZ10	LSZ9	LSZ8	
COMMAND50 (Box control U)	1	1	0	1	0	0	0	0	BXUW	BXLW	0	BXUCT0	BXUC3	BXUC2	BXUC1	BXUC0	
COMMAND51 (Box control D)	1	1	0	1	0	1	0	0	BXDW	BXRW	0	BXDCT0	BXDC3	BXDC2	BXDC1	BXDC0	
COMMAND52 (Box control: line setting U)	1	1	0	1	1	0	0	0	LBX7	LBX6	LBX5	LBX4	LBX3	LBX2	LBX1	LBX0	
COMMAND53 (Box control: line setting D)	1	1	0	1	1	1	0	0	LBX15	LBX14	LBX13	LBX12	LBX11	LBX10	LBX9	LBX8	
COMMAND60 (Border control)	1	1	1	0	0	0	BLK1	BLK0	0	0	0	EGCT0	EGC3	EGC2	EGC1	EGC0	
COMMAND61 (Border control: line setting U)	1	1	1	0	0	1	0	0	LFC7	LFC6	LFC5	LFC4	LFC3	LFC2	LFC1	LFC0	
COMMAND62 (Border control: line setting D)	1	1	1	0	1	0	0	0	LFC15	LFC14	LFC13	LFC12	LFC11	LFC10	LFC9	LFC8	
COMMAND70 (Write address) Color Table	1	1	1	1	0	0	0	0	0	0	0	CIN1	CTA3	CTA2	CTA1	CTA0	
COMMAND71 (Data write) Color Table	1	1	1	1	0	1	0	RM3(1)	0	0	0	0	TCK	TB2	TB1	TB0	
								(2)	0	0	TG2	TG1	TG0	TR2	TR1	TR0	

Command 00 (Main screen write address set command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 0 identification code Main screen write address setting Sub-identification code: 0	
6	—	0		
5	—	0		
4	—	0		
3	—	0		
2	—	0		
1	V3 <MSB>	0		
		1		
0	V2	0		
		1		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	V1	0	Main screen memory line address	
		1	(0 to E, hexadecimal)	
6	V0 <LSB>	0	QVGA mode: 13 lines	
		1	WVGA mode: 15 lines	
5	H5 <MSB>	0	Main screen memory character position address (00 to 27, hexadecimal) QVGA mode: 40 characters WVGA mode: 33 characters	
		1		
4	H4	0		
		1		
3	H3	0		
		1		
2	H2	0		
		1		
1	H1	0		
		1		
0	H0 <LSB>	0		
		1		


Command 01 (Subscreen write address set command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1		
6	—	0	Command 0 identification code	
5	—	0	Subscreen memory write address setting	
4	—	0		
3	—	0	Sub-identification code: 1	
2	—	1		
1	—	0		
0	—	0		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	0		
6	V0	0	Subscreen memory line address	
		1	(0 to 1, hexadecimal) 2 lines	
5	—	0		
4	—	0		
3	—	0		
2	—	0		
1	—	0		
0	H0 <LSB>	0	Subscreen memory character address	
		1	(0 to 1, hexadecimal) 2 characters	

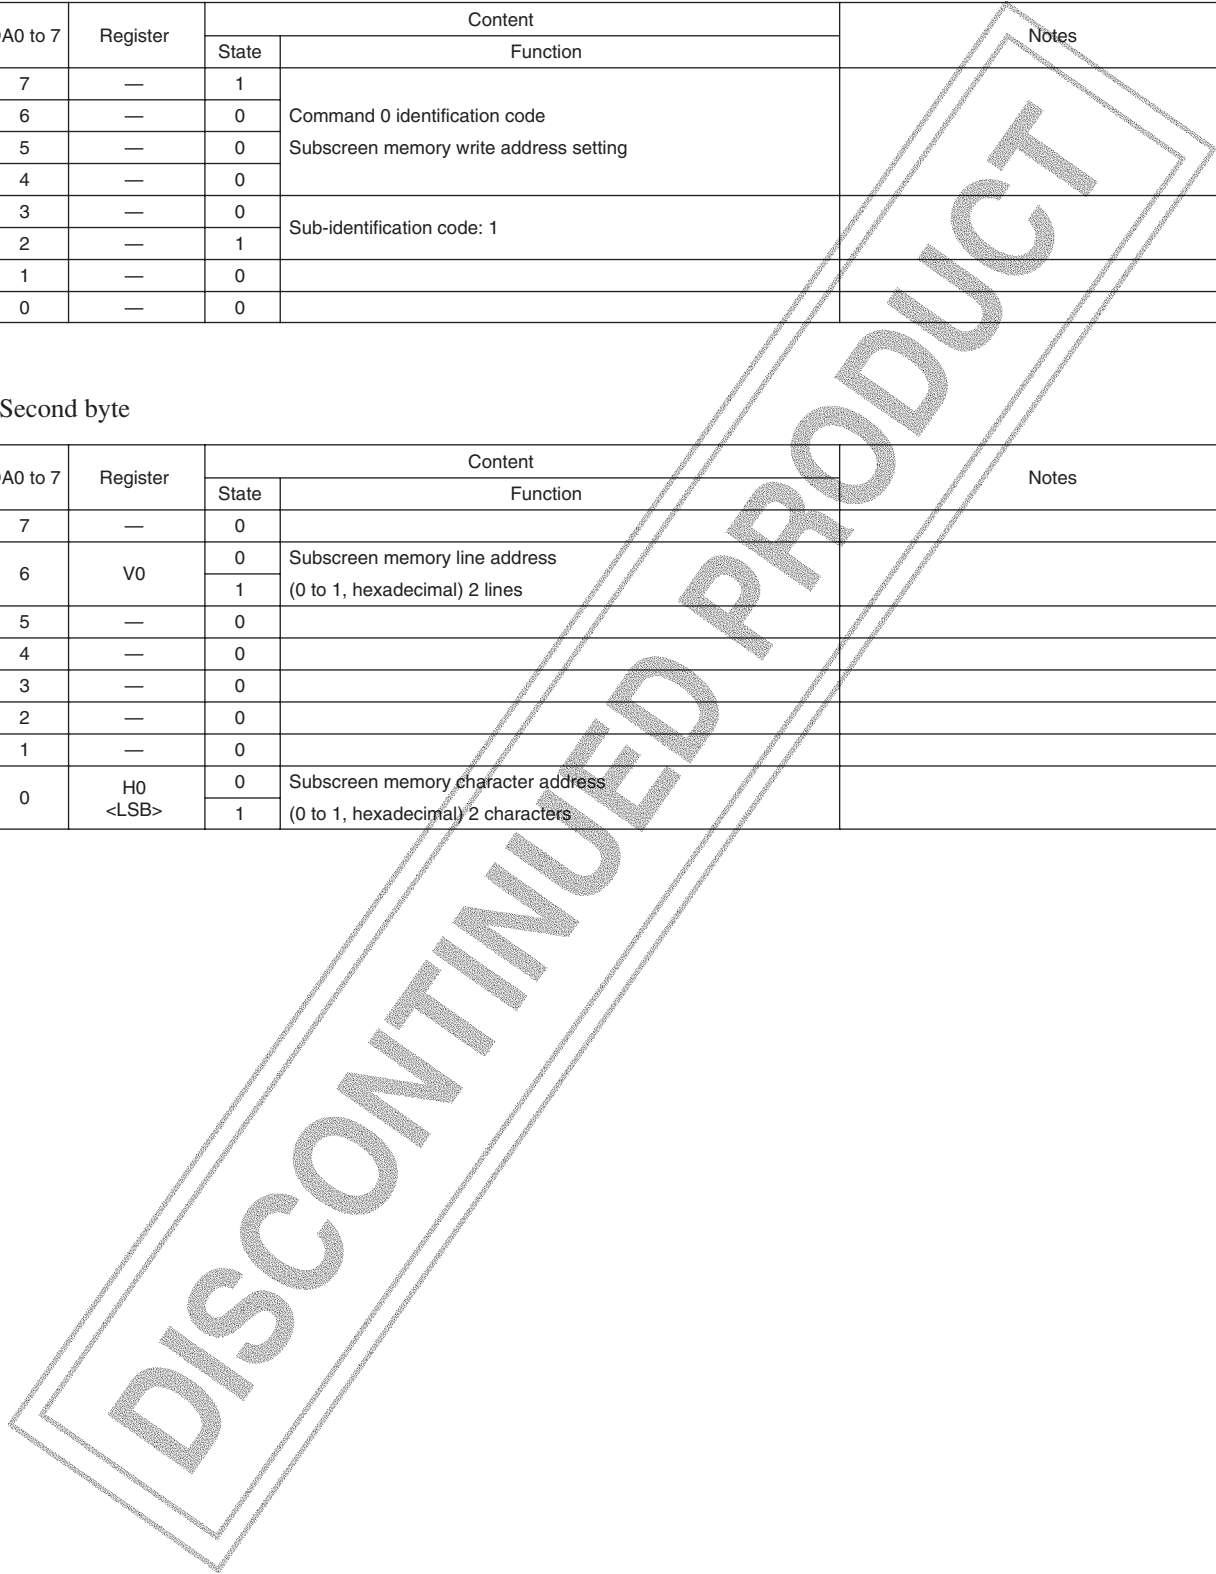

Command 10 (Main screen display character data write setting command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1		When this command has been issued, the IC remains in display character data write mode until the CS pin is set high.
6	—	0	Command 1 identification code	
5	—	0	Display character data write setting	
4	—	1		
3	—	0		
2	—	0	Sub-identification code 0	
1	RM2	0	RM2 RM1 Mode 0 0 (1)(2)(3)(4) End	Continuous write mode selection
		1	0 1 (1)(2)(3)(4) Continuous	
0	RM1	0	1 0 (3)(4) Continuous	
		1	1 1 (2)(3)(4) Continuous	

• Second byte (1)

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	0		
6	—	0		
5	at	0	Blinking off	Blinking specification
		1	Blinking on	
4	BXS	0	Protruding	Box specification: raised/recessed
		1	Recessed	
3	BXL	0	None	Box specification: left side
		1	Box displayed	
2	BXR	0	None	Box specification: right side
		1	Box displayed	
1	BXU	0	None	Box specification: top
		1	Box displayed	
0	BXD	0	None	Box specification: Bottom
		1	Box displayed	

• Second byte (2)

DA0 to 7	Register	Content		Notes		
		State	Function			
7	CB3 [MSB]	0	Character background color specification 0000 to 1111, or 0 to F (hexadecimal)	Character background color specification When a character glyph is specified, 1 of 16 colors may be selected.		
		1				
6	CB2	0				
		1				
5	CB1	0				
		1				
4	CB0 [LSB]	0				
		1				
3	CC3 [MSB]	0			Character color specification 0000 to 1111, or 0 to F (hexadecimal)	Character color specification When a character glyph is specified, 1 of 16 colors may be selected.
		1				
2	CC2	0				
		1				
1	CC1	0				
		1				
0	CC0 <LSB>	0				
		1				

*: This register is set to the all bits zero state when the IC is reset by the $\overline{\text{RST}}$ pin.

• Second byte (3)

DA0 to 7	Register	Content		Notes				
		State	Function					
7	—	0						
6	—	0						
5	CT0	0	Color table number 1	Color table selection				
		1	Color table number 2					
4	I/E	0	Internal ROM	ROM selection				
		1	External ROM					
3	M/G	0	Character	Character/graphic specification				
		1	Graphic					
2	C10 [MSB]	0						
		1						
1	C9	0				Character code specification		
		1						
0	C8	0						
		1						

• Second byte (4)

DA0 to 7	Register	Content		Notes														
		State	Function															
7	C7	0	Character code Internal ROM: 512 characters 000 to 1FF (hexadecimal) 0 to 511 External ROM: 2048 characters 000 to 7FF (hexadecimal) 0 to 2047 * Transparent character specification I/E = 0 (Internal ROM) M/G = 0 (Character) Code = 1FF (hexadecimal)	Character code specification														
		1																
6	C6	0			Character code Internal ROM: 512 characters 000 to 1FF (hexadecimal) 0 to 511 External ROM: 2048 characters 000 to 7FF (hexadecimal) 0 to 2047 * Transparent character specification I/E = 0 (Internal ROM) M/G = 0 (Character) Code = 1FF (hexadecimal)	Character code specification												
		1																
5	C5	0					Character code Internal ROM: 512 characters 000 to 1FF (hexadecimal) 0 to 511 External ROM: 2048 characters 000 to 7FF (hexadecimal) 0 to 2047 * Transparent character specification I/E = 0 (Internal ROM) M/G = 0 (Character) Code = 1FF (hexadecimal)	Character code specification										
		1																
4	C4	0							Character code Internal ROM: 512 characters 000 to 1FF (hexadecimal) 0 to 511 External ROM: 2048 characters 000 to 7FF (hexadecimal) 0 to 2047 * Transparent character specification I/E = 0 (Internal ROM) M/G = 0 (Character) Code = 1FF (hexadecimal)	Character code specification								
		1																
3	C3	0									Character code Internal ROM: 512 characters 000 to 1FF (hexadecimal) 0 to 511 External ROM: 2048 characters 000 to 7FF (hexadecimal) 0 to 2047 * Transparent character specification I/E = 0 (Internal ROM) M/G = 0 (Character) Code = 1FF (hexadecimal)	Character code specification						
		1																
2	C2	0											Character code Internal ROM: 512 characters 000 to 1FF (hexadecimal) 0 to 511 External ROM: 2048 characters 000 to 7FF (hexadecimal) 0 to 2047 * Transparent character specification I/E = 0 (Internal ROM) M/G = 0 (Character) Code = 1FF (hexadecimal)	Character code specification				
		1																
1	C1	0													Character code Internal ROM: 512 characters 000 to 1FF (hexadecimal) 0 to 511 External ROM: 2048 characters 000 to 7FF (hexadecimal) 0 to 2047 * Transparent character specification I/E = 0 (Internal ROM) M/G = 0 (Character) Code = 1FF (hexadecimal)	Character code specification		
		1																
0	C0 [LSB]	0															Character code Internal ROM: 512 characters 000 to 1FF (hexadecimal) 0 to 511 External ROM: 2048 characters 000 to 7FF (hexadecimal) 0 to 2047 * Transparent character specification I/E = 0 (Internal ROM) M/G = 0 (Character) Code = 1FF (hexadecimal)	Character code specification
		1																

*: This register is set to the all bits zero state when the IC is reset by the $\overline{\text{RST}}$ pin.

Command 11 (Subscreen display character data write setting command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1		When this command has been issued, the IC remains in display character data write mode until the CS pin is set high.
6	—	0	Command 1 identification code	
5	—	0	Display character data write setting	
4	—	1		
3	—	0		Sub-identification code 1
2	—	0		
1	RM2	0	RM2 RM1 Mode 0 0 [1][2][3][4] End	Continuous write mode selection
		1	0 1 [1][2][3][4] Continuous	
0	RM1	0	1 0 [3][4] Continuous	
		1	1 1 [2][3][4] Continuous	

• Second byte (1)

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	0		
6	—	0		
5		0		
4		0		
3		0		
2		0		
1		0		
0		0		

• Second byte (2)

DA0 to 7	Register	Content		Notes
		State	Function	
7		0		
6		0		
5		0		
4		0		
3		0		
2		0		
1		0		
0		0		

*: This register is set to the all bits zero state when the IC is reset by the RST pin.

LC74735W

• Second byte (3)

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	0		
6	—	0		
5	CT0	0	Color table number 1	Color table selection
		1	Color table number 2	
4	I/E	0	Internal ROM	ROM selection
		1	External ROM	
3	M/G	0	Only when transparent is selected	Graphic only
		1	Graphic only	
2	C10 [MSB]	0	Character code specification	
		1		
1	C9	0		
		1		
0	C8	0		
		1		

• Second byte (4)

DA0 to 7	Register	Content		Notes
		State	Function	
7	C7	0	Character code Internal ROM: 512 characters 000 to 1FF (hexadecimal) 0 to 511 External ROM: 2048 characters 000 to 7FF (hexadecimal) 0 to 2047 * Transparent character specification I/E = 0 (Internal ROM) M/G = 0 (Character) Code = 1FF (hexadecimal)	Character code specification
		1		
6	C6	0		
		1		
5	C5	0		
		1		
4	C4	0		
		1		
3	C3	0		
		1		
2	C2	0		
		1		
1	C1	0		
		1		
0	C0 [LSB]	0		
		1		

*: This register is set to the all bits zero state when the IC is reset by the $\overline{\text{RST}}$ pin.

Command 20 (System control settings command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 2 identification code	
6	—	0		
5		1		
4		0	System control settings	
3		0	Sub-identification code 0	
2		0		
1		0		
0		0		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	TSTMD2	0	Normal operation	Do not use test mode. This bit must be set to 0.
		1	Test mode 2	
6	TSTMD1	0	Normal operation	Do not use test mode. This bit must be set to 0.
		1	Test mode 1	
5	Q/W2	0	Normal mode	Normal / Independent
		1	Independent mode	
4	Q/W1	0	QVGA mode	QVGA / WVGA
		1	WVGA mode	
3	SYSRST	0		The registers are reset when the CSB pin is low. The reset state is cleared when the CSB pin goes high.
		1	Reset all registers (All bits set to 0.)	
2	CTERS	0		Applications must provide a wait time of about 1ms. Use DSPOFF to execute this operation.
		1	Erase the color table. (Sets all values to 00.)	
1	SRMERS	0		Applications must provide a wait time of about 1ms. Use DSPOFF to execute this operation.
		1	Erase main RAM. (Sets all values to 00.) Wallpaper	
0	MRMERS	0		Applications must provide a wait time of about 1ms. Use DSPOFF to execute this operation.
		1	Erase sub-RAM. (Sets all values to 00.) Main screen	

Command 21 (Display control settings command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 2 identification code	
6	—	0		
5	—	1		
4	—	0		
3	—	0	Display control	
2	—	0		
1	—	0		
0	—	1		
			Sub-identification code 1	

• Second byte

DA0 to 7	Register	Content		Notes												
		State	Function													
7	LCSOFF	0	Enables stopping the LC oscillator	LC oscillator stop control												
		1	Disables stopping the LC oscillator													
6	BK1	0	<table border="0"> <tr> <td>BK1</td> <td>BK0</td> <td></td> </tr> <tr> <td>0</td> <td>0</td> <td>1/16</td> </tr> <tr> <td>0</td> <td>1</td> <td>1/32</td> </tr> <tr> <td>1</td> <td>0</td> <td>1/64</td> </tr> </table>	BK1	BK0		0	0	1/16	0	1	1/32	1	0	1/64	Blinking period Specified for screen units.
		BK1		BK0												
0	0	1/16														
0	1	1/32														
1	0	1/64														
1																
5	BK0	0														
		1														
4	SBG1	0	Display before the main screen	Subscreen display specification												
		1	Display after the main screen													
3	SBG0	0	Iterated display (wallpaper)	Subscreen display specification												
		1	Horizontal 2-character x vertical 2-character display (sprite)													
2	DSPBG	0	Display off	Screen background color												
		1	Display on													
1	DSPGS	0	Display off	Subscreen (wallpaper)												
		1	Display on													
0	DSPGM	0	Display off	Main screen												
		1	Display on													







*: This register is set to the all bits zero state when the IC is reset by the $\overline{\text{RST}}$ pin.

Command 22 (I/O polarity control settings command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 2 identification code	
6	—	0		
5	—	1		
4	—	0		
3	—	0	Display character data write settings	
2	—	0		
1	—	1		
0	—	0		
		Extended command identification code 2		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	BLD1	0	BLD1 BLD0	BLK output delay setting In dot clock units
		1	0 0 ±0	
6	BLD0	0	0 1 +1	
		1	1 0 +2 1 1 +3	
5	BLOP	0	BLK output: positive polarity 	BLK output polarity selection
		1	BLK output: negative polarity 	
4	BLO1	0	BLO1 BLO0	BLK output control
		1	0 0 Text + character background + wallpaper + screen background	
3	BLO0	0	0 1 Text + character background + wallpaper	
		1	1 0 Text + character background 1 1 Text	
2	CKP	0	Clock input: positive polarity	Clock input polarity selection
		1	Clock input: negative polarity	
1	VIP	0	VSYNC input: negative polarity 	VSYNC input polarity selection
		1	VSYNC input: positive polarity 	
0	HIP	0	HSYNC input: negative polarity 	HSYNC input polarity selection
		1	HSYNC input: positive polarity 	

*: This register is set to the all bits zero state when the IC is reset by the RST pin.

Command 23 (Screen background color settings command)


• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 2 identification code	
6	—	0		
5	—	1		
4	—	0		
3	—	0	Display character data write settings	
2	—	0		
1	—	1		
0	—	1		
		Extended command identification code 3		

• Second byte

DA0 to 7	Register	Content		Notes												
		State	Function													
7	—	0														
6	—	0														
5	BGCT1	0	<table border="0"> <tr> <td>T1</td> <td>T0</td> <td></td> </tr> <tr> <td>0</td> <td>0</td> <td>Color table No. 2</td> </tr> <tr> <td>0</td> <td>1</td> <td>Invalid setting</td> </tr> <tr> <td>1</td> <td>X</td> <td>Color table No. 1</td> </tr> </table>	T1	T0		0	0	Color table No. 2	0	1	Invalid setting	1	X	Color table No. 1	Screen background color Color table setting
		T1		T0												
0	0	Color table No. 2														
0	1	Invalid setting														
1	X	Color table No. 1														
4	BGCT0	0														
		1														
3	BGC3	0	Screen background color 0000 to 1111 0 to F (hexadecimal)	Screen background color Selects 1 of 16 values.												
		1														
2	BGC2	0														
		1														
1	BGC1	0														
		1														
0	BGC0	0														
		1														

*: This register is set to the all bits zero state when the IC is reset by the RST pin.

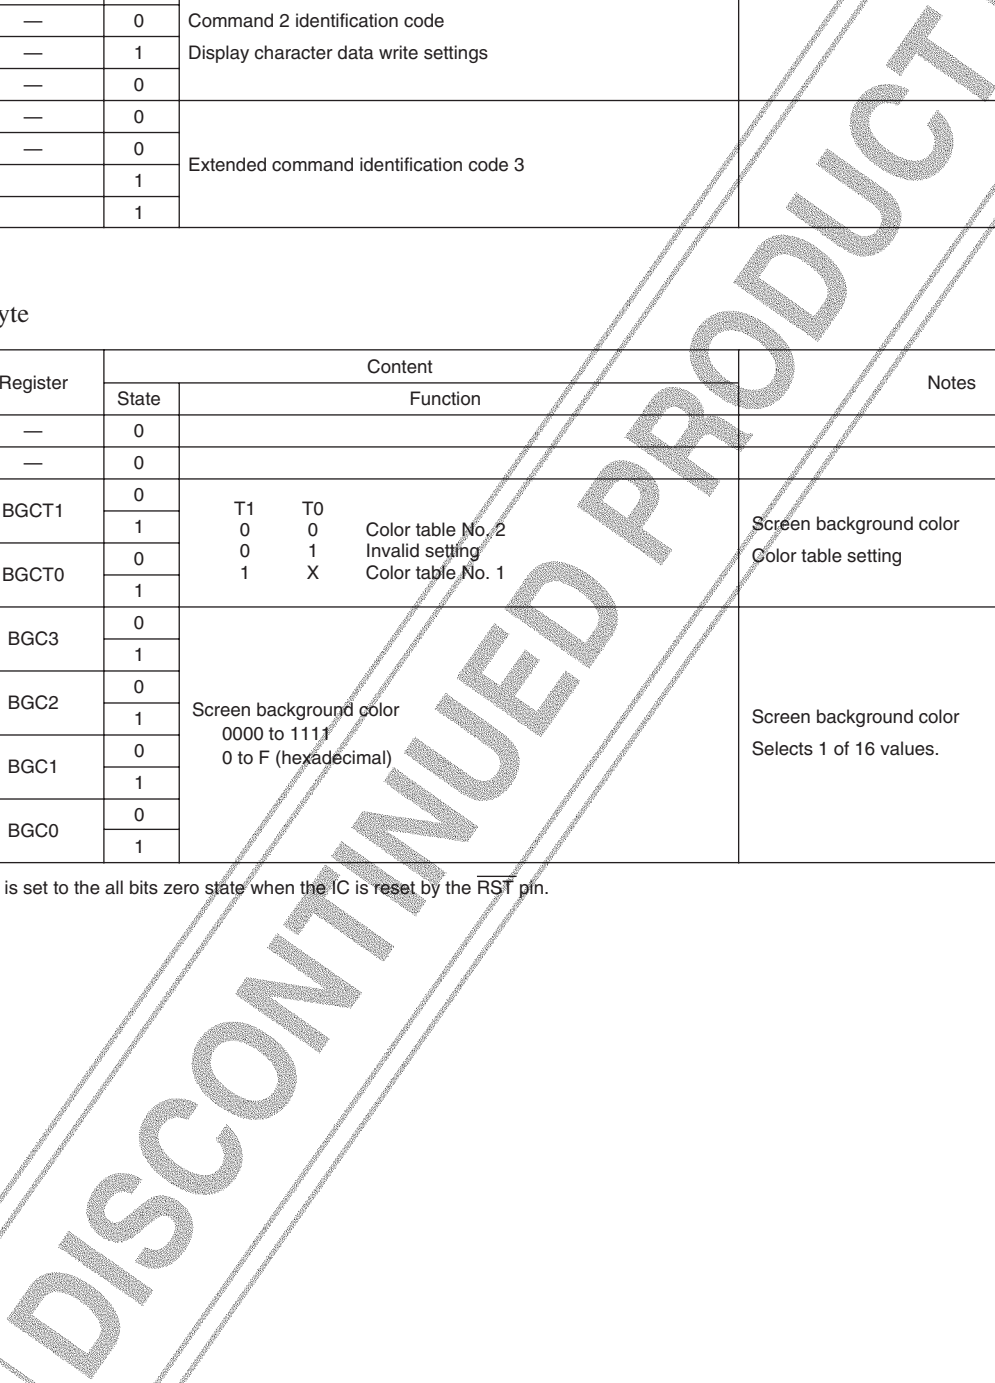

Command 24 (I/O polarity control settings command)


• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 2 identification code	
6	—	0		
5	—	1		
4	—	0		
3	—	0	Display character data write settings	
2	—	1		
1	—	0		
0	—	0		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	DSPMD1	0	MD1 MD0 0 0 40 characters × 13 lines	Main screen display area selection Clock output polarity selection
		1		
6	DSPMD0	0	1 0 40 characters × 16 lines	Only valid in independent mode. COM20 to COM2
		1		
5	D/ASEL	0	On	D/A converter used/unused selection Only valid in independent mode. COM20 to COM2
		1	Off	
4	VBLKON	0	Disabled	VBLK input selection
		1	Enabled	
3	HBLKON	0	Disabled	HBLK input selection
		1	Enabled	
2	CKOP	0	Clock output positive polarity	Clock output polarity selection
		1	Clock output negative polarity	
1	VBP	0	VBLK input negative polarity	VBLK input polarity selection
		1	VBLK input positive polarity	
0	HBP	0	HBLK input negative polarity	HBLK input polarity selection
		1	HBLK input positive polarity	

*: This register is set to the all bits zero state when the IC is reset by the RST pin.

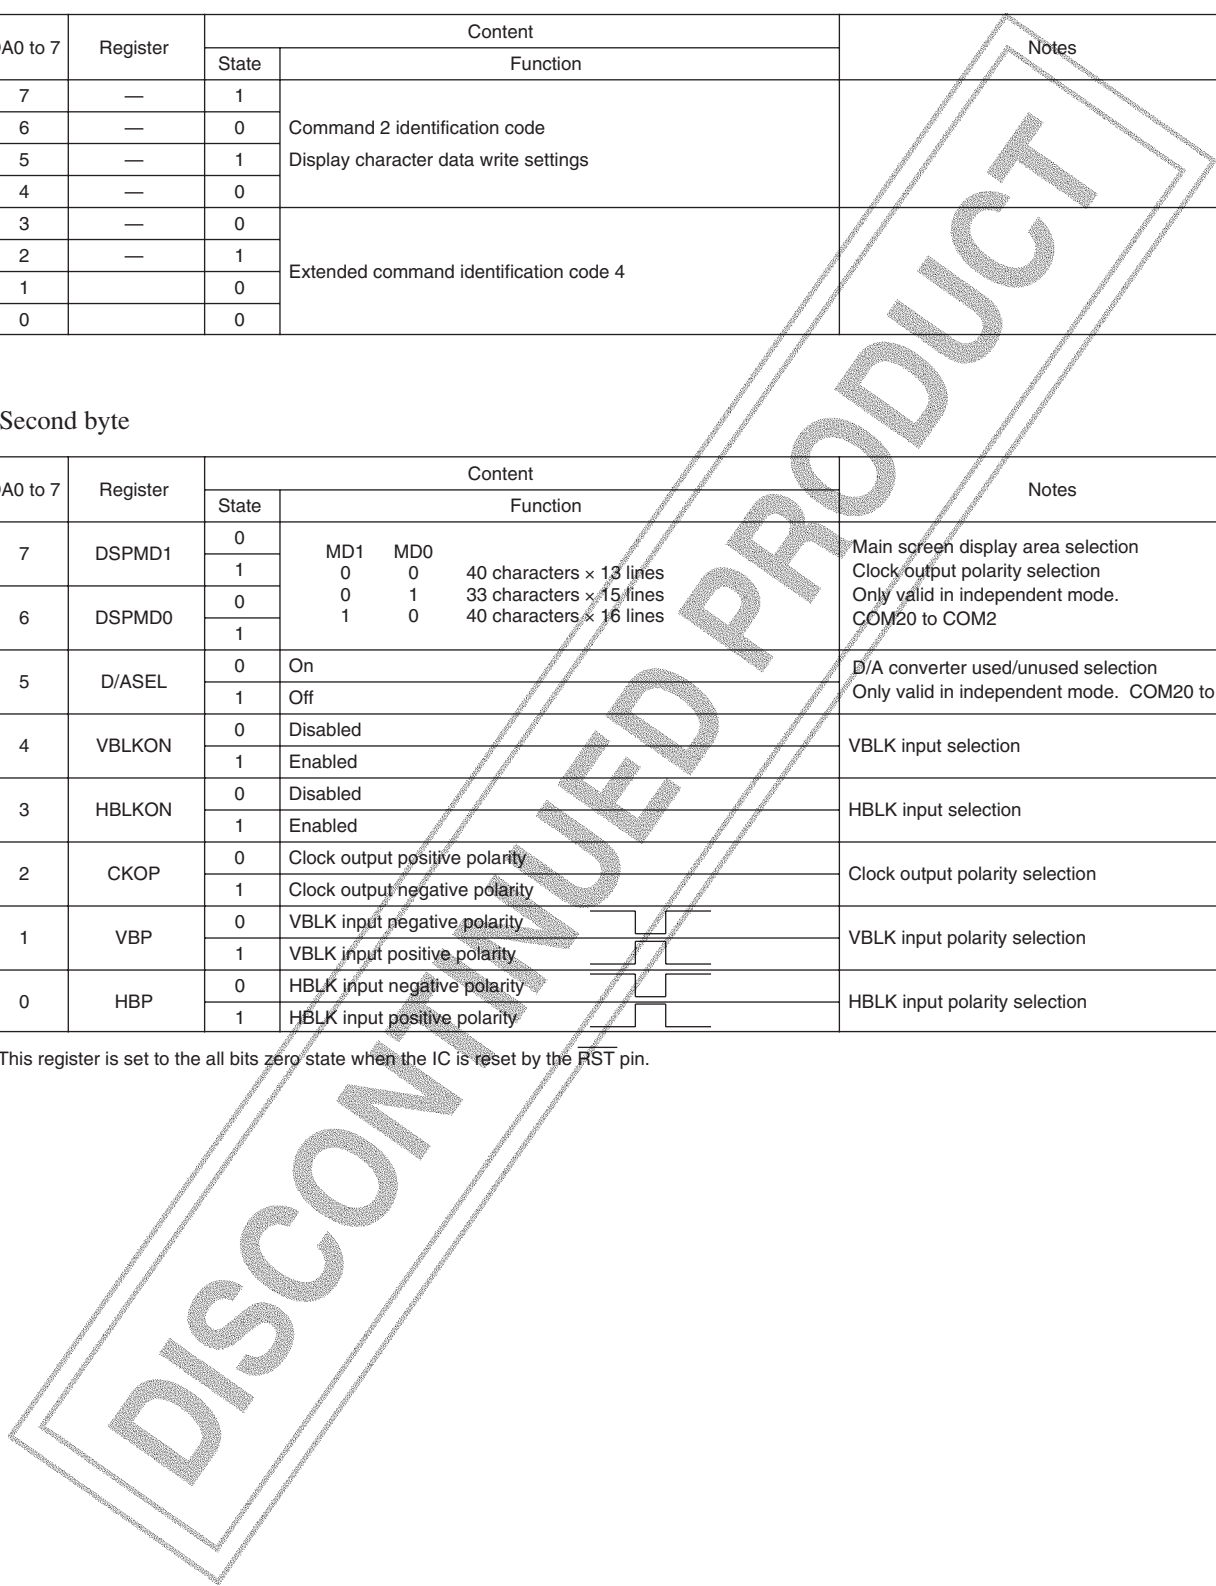

Command 25 (Output control 3 settings command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 2 identification code	
6	—	0		
5	—	1		
4	—	0		
3	—	0	Display character data write settings	
2	—	1		
1	—	0		
0	—	1		

• Second byte

DA0 to 7	Register	Content				Notes	
		State	Function				
7	—	0					
6	—	0					
5	—	0					
4	OTMD2	0				A0:17 output selection	
		1	OTMD2	OTMD1	OTMD0		Output
3	OTMD1	0	0	0	Normal		
		1	0	0	1		RGB No. 1
2	OTMD0	0	0	1	0		RGB No. 2
		1	0	1	1		High-impedance state
1	QRM1	0	QRM1	QRM0	ROM selection		ROM selection when character output is specified in QVGA mode
		1	0	0	ROM1		
0	QRM0	0	0	1	ROM2		
		1	1	0	ROM3		
		0	0	1	ROM4		
		1	1	1	ROM4		

*: This register is set to the all bits zero state when the IC is reset by the RST pin.

• When RGB No. 1 or RGB No. 2 is selected:

The A17:9 output is set to the RDB2 to BD0 three-value output. (Supported by connecting external resistors.)

* It will not be possible to use external ROM in this case. (Only internal ROM can be used.)

No. 1: RGB = 000 = Black only. Here the output will go to the high-impedance state giving the middle level due to the external resistor.

For areas other than the display area, the output will be at the low level.

No. 2: When any individual color is zero, the output will go to the high-impedance state giving the middle level due to the external resistor.


For areas other than the display area, the output will be at the low level.


Command 30 (Main screen: vertical display start position setting command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 3 identification code	
6	—	0		
5	—	1		
4	—	1	Main screen: vertical display start position setting	
3	—	0	Extended command identification code 0	
2	—	0		
1	—	0		
0	—	0		

• Second byte

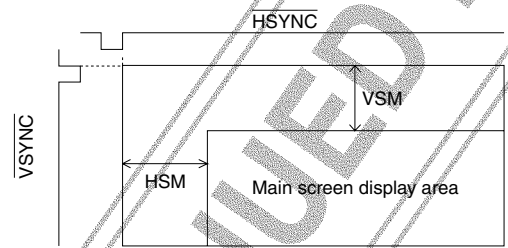DA0 to 7	Register	Content		Notes
		State	Function	
7	VPM7 (MSB)	0	The vertical display start position, VSM, is given by: $VSM = 1H \times \left(\sum_{n=0}^7 2^n \cdot VPMn \right)$ 	Main screen The vertical display start position is specified by the 8 bits VPM7:0. The weight of the LSB is 1H in QVGA mode, and the weight of the LSB is 2H in WVGA mode This setting applies in screen units.
		1		
6	VPM6	0		
		1		
5	VPM5	0		
		1		
4	VPM4	0		
		1		
3	VPM3	0		
		1		
2	VPM2	0		
		1		
1	VPM1	0		
		1		
0	VPM0 (LSB)	0		
		1		

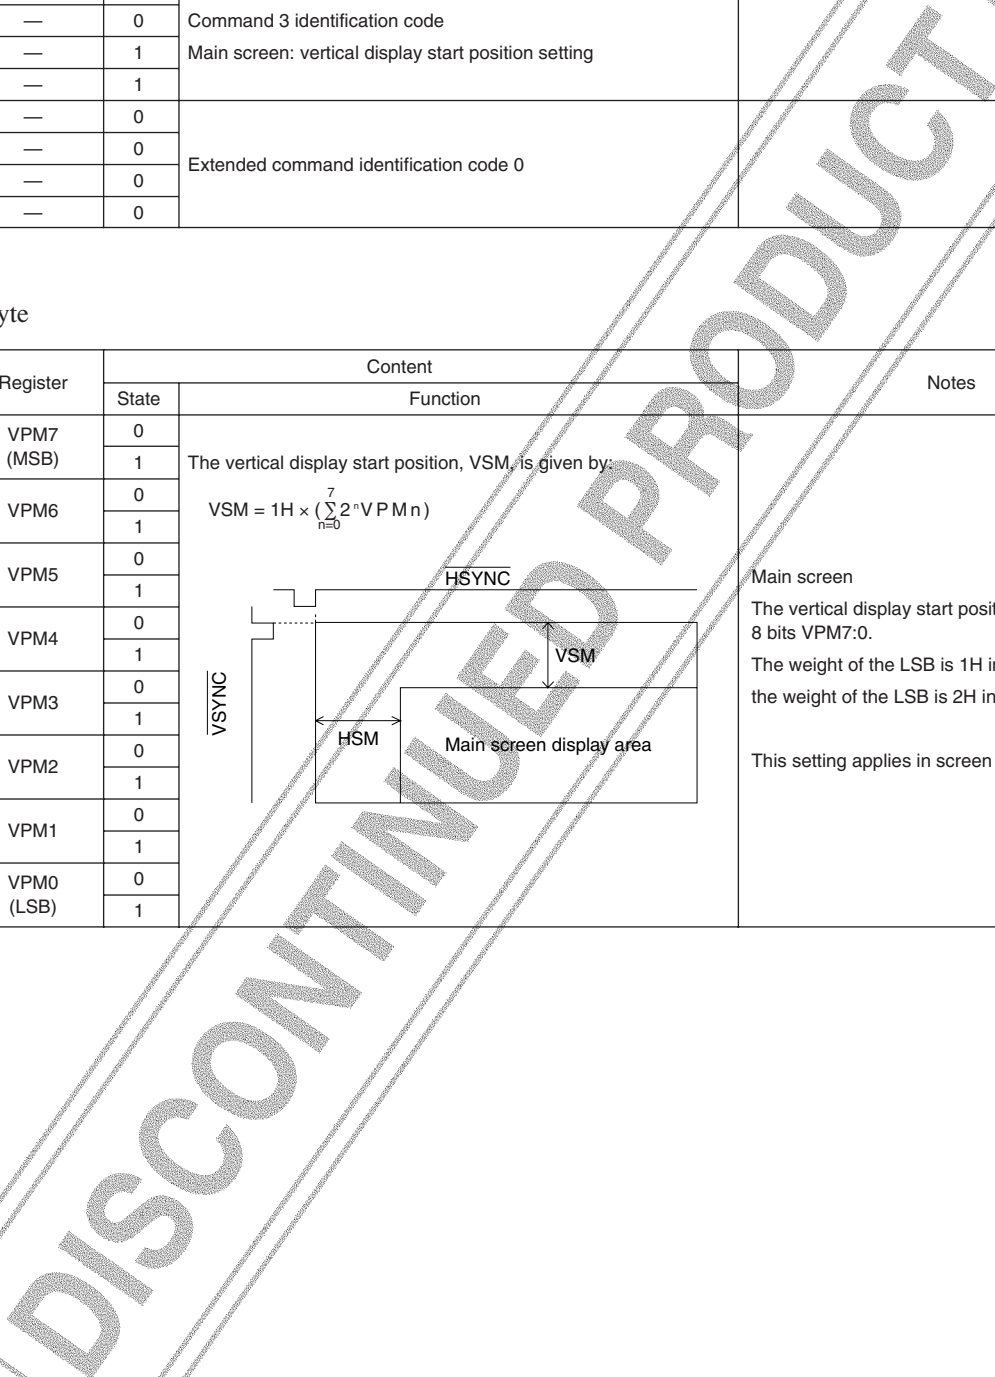

Command 31 (Main screen: horizontal display start position setting command)


• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 3 identification code	
6	—	0		
5	—	1		
4	—	0		
3	—	0		
2	—	0		
1	—	1		
0	HPM8 (MSB)	0		
		1		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	HPM7	0	The horizontal display start position, HSM, is given by: $HSM = 1Tc \times \left(\sum_{n=0}^8 2^n HPMn \right) + \alpha$ $\alpha = 57 Tc$ Tc: The input clock frequency in operating mode. • Setting disable range QVGA : 00 to 0F HEX WVGA : 00 to 07 HEX	Main screen The horizontal display start position is specified by the 9 bits HPM8:0. The weight of the LSB is 1TC in QVGA mode, and the weight of the LSB is 2TC in WVGA mode This setting applies in screen units.
		1		
6	HPM6	0		
		1		
5	HPM5	0		
		1		
4	HPM4	0		
		1		
3	HPM3	0		
		1		
2	HPM2	0		
		1		
1	HPM1	0		
		1		
0	HPM0 (LSB)	0		
		1		

*: This register is set to the all bits zero state when the IC is reset by the RST pin.

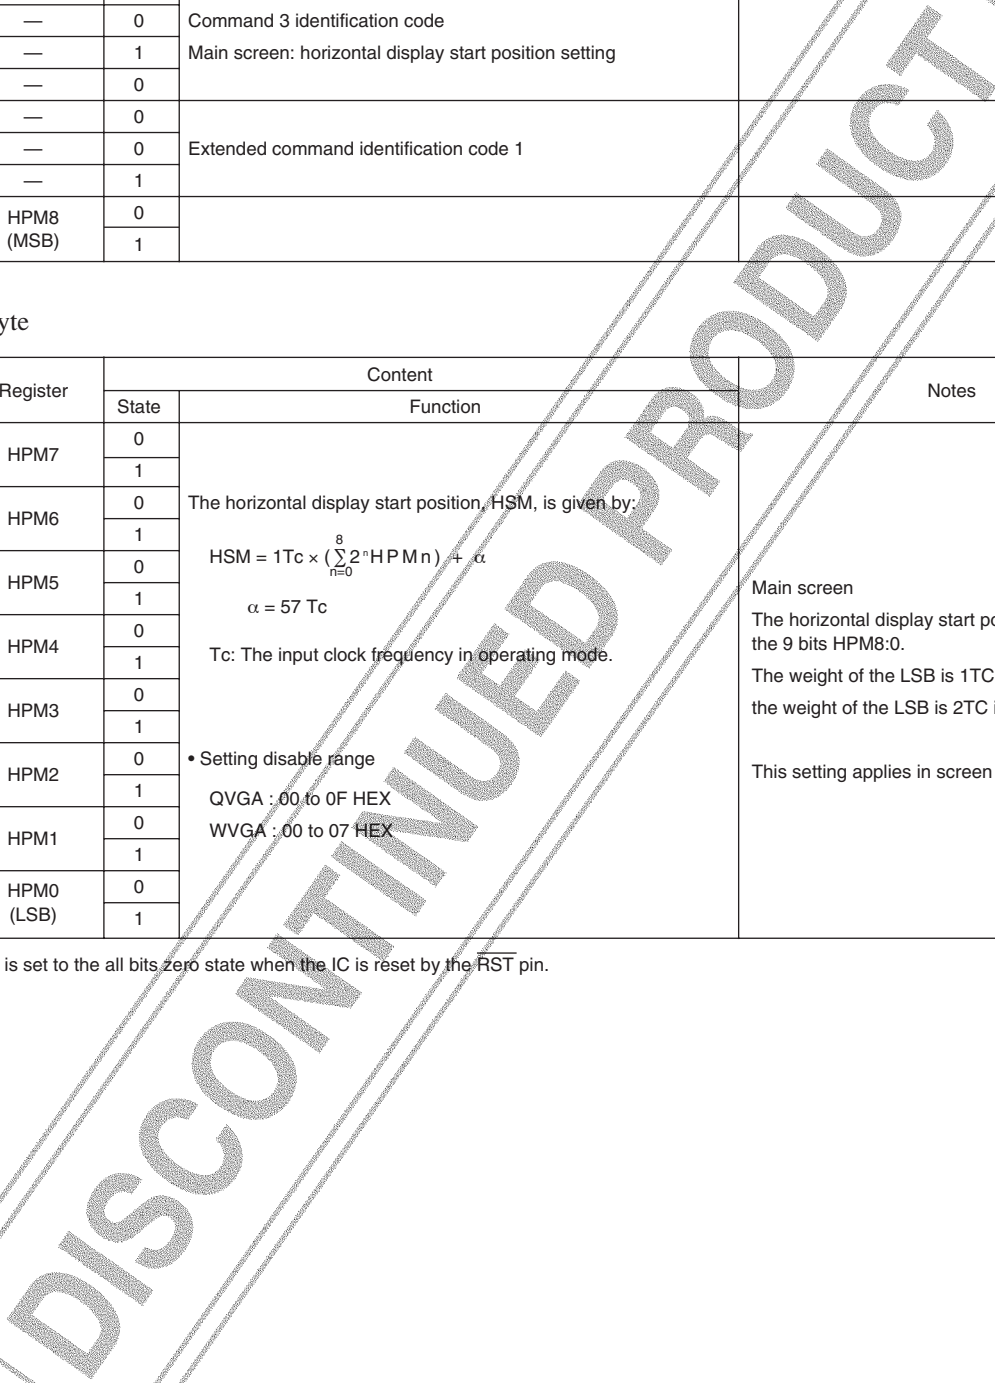


Command 32 (Subscreen: vertical display start position setting command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 3 identification code	
6	—	0		
5	—	1		
4	—	1		
3	—	0	Subscreen: vertical display start position setting	
2	—	1		
1	—	0		
0	—	0		

• Second byte

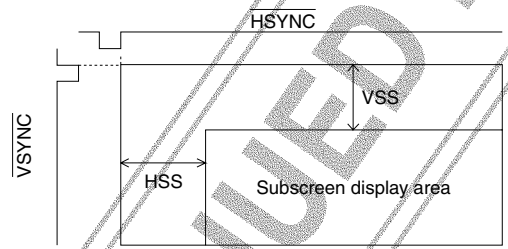DA0 to 7	Register	Content		Notes
		State	Function	
7	VPS7 (MSB)	0	The vertical display start position, VSS, is given by: $VSS = 1H \times \left(\sum_{n=0}^7 2^n \cdot VPS_n \right)$ 	Subscreen (wallpaper) The vertical display start position is specified by the 8 bits VPS7:0. The weight of the LSB is 1H in QVGA mode, and the weight of the LSB is 2H in WVGA mode This setting applies in screen units.
		1		
6	VPS6	0		
		1		
5	VPS5	0		
		1		
4	VPS4	0		
		1		
3	VPS3	0		
		1		
2	VPS2	0		
		1		
1	VPS1	0		
		1		
0	VPS0 (LSB)	0		
		1		

Command 33 (Subscreen: horizontal display start position setting command)


• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 3 identification code	
6	—	0		
5	—	1		
4	—	0		
3	—	0		
2	—	1		
1	—	1		
0	HPS8 (MSB)	0		
		1		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	HPS7	0	The horizontal display start position, HSS, is given by: $HSS = 1Tc \times \left(\sum_{n=0}^8 2^n HPSn \right) + \alpha$ $\alpha = 14 Tc$ Tc: The input clock frequency in operating mode. • Setting disable range QVGA : 00 to 2F HEX WVGA : 00 to 17 HEX	Subscreen (wallpaper) The horizontal display start position is specified by the 9 bits HPS8:0. The weight of the LSB is 1Tc in QVGA mode, and the weight of the LSB is 2Tc in WVGA mode This setting applies in screen units.
		1		
6	HPS6	0		
		1		
5	HPS5	0		
		1		
4	HPS4	0		
		1		
3	HPS3	0		
		1		
2	HPS2	0		
		1		
1	HPS1	0		
		1		
0	HPS0 (LSB)	0		
		1		

*: This register is set to the all bits zero state when the IC is reset by the RST pin.

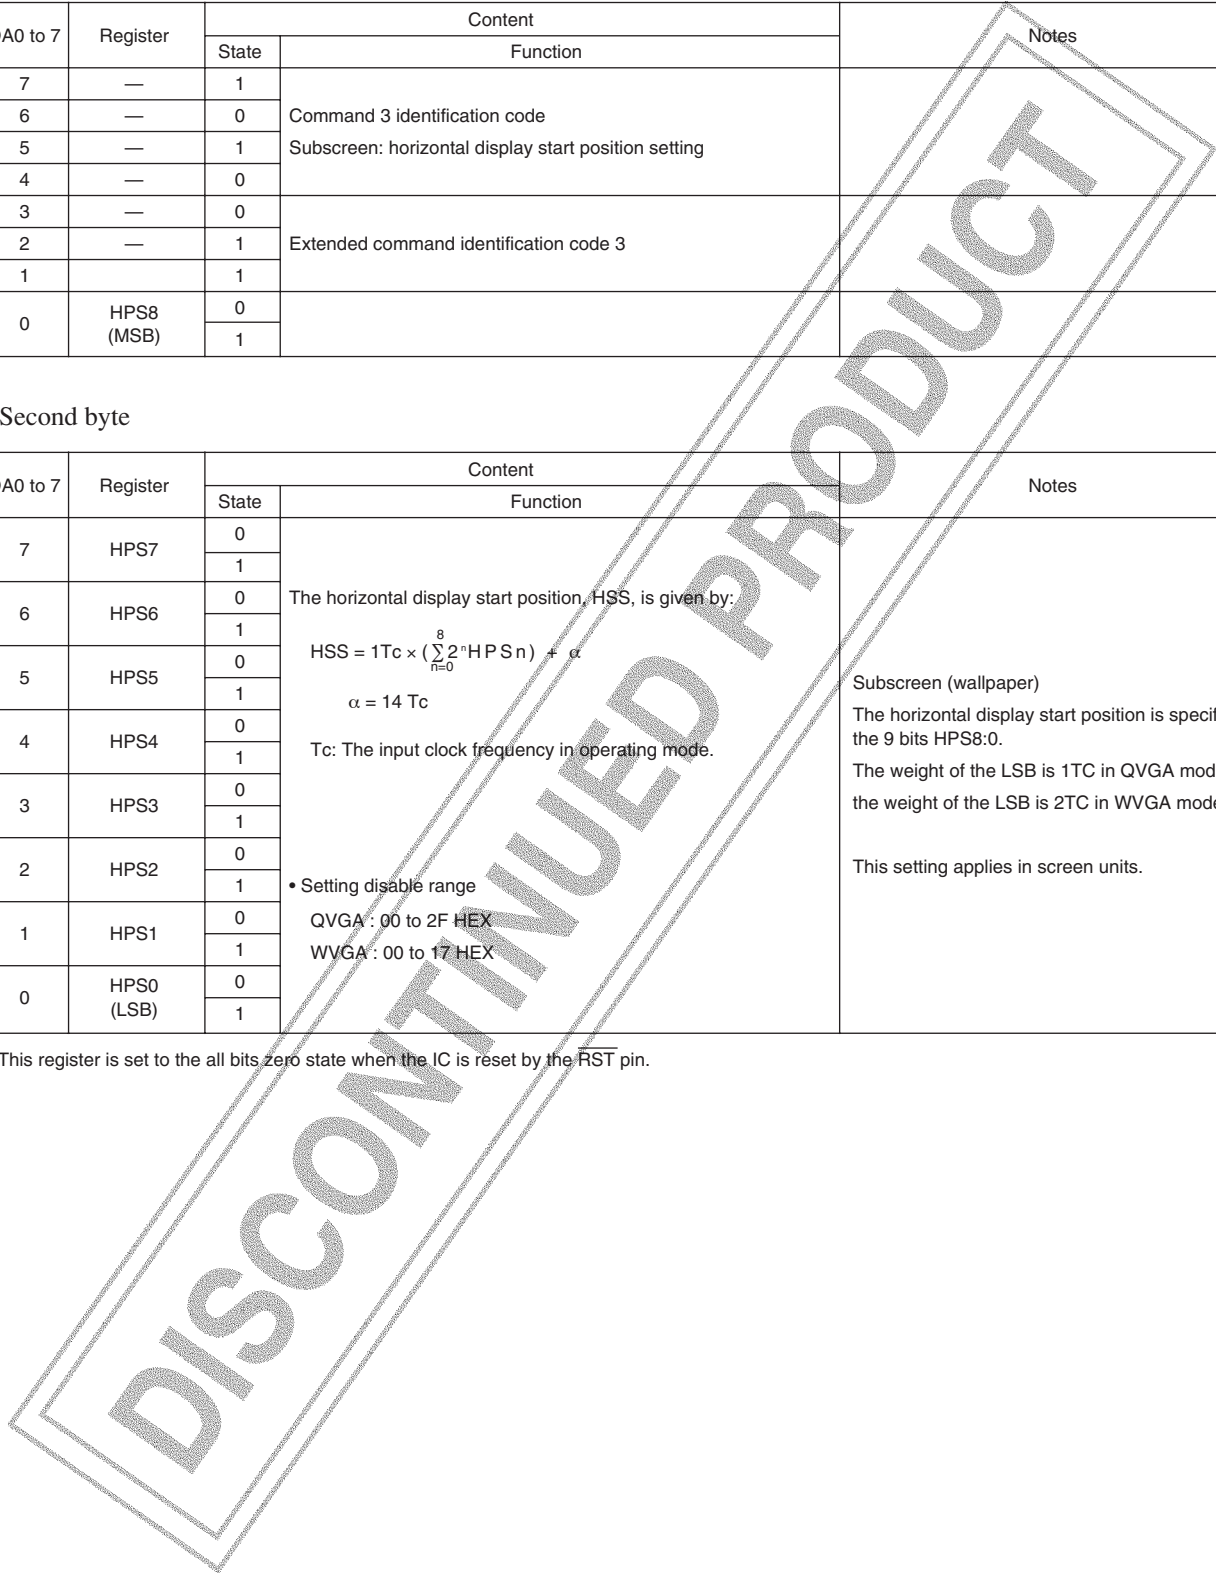

Command 34 (Screen background color: vertical display start position setting command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 3 identification code	
6	—	0		
5	—	1		
4	—	1		
3	—	1	Screen background color: vertical display start position setting	
2	—	0		
1	—	0		
0	—	0		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	VPG7 (MSB)	0	<p>The vertical display start position, VSG, is given by:</p> $VSG = 1H \times \left(\sum_{n=0}^7 2^n \cdot VPG_n \right)$	<p>Screen background color</p> <p>The vertical display start position is specified by the 8 bits VPG7:0.</p> <p>The weight of the LSB is 1H in QVGA mode, and the weight of the LSB is 2H in WVGA mode</p> <p>This setting applies in screen units.</p>
		1		
6	VPG6	0		
		1		
5	VPG5	0		
		1		
4	VPG4	0		
		1		
3	VPG3	0		
		1		
2	VPG2	0		
		1		
1	VPG1	0		
		1		
0	VPG0 (LSB)	0		
		1		

Command 35 (Screen background color: horizontal display start position setting command)


• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 3 identification code Screen background color: horizontal display start position setting Extended command identification code 5	
6	—	0		
5	—	1		
4	—	1		
3	—	1		
2	—	0		
1	—	1		
0	HPS8 (MSB)	0		
		1		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	HPG7	0	The horizontal display start position, HSG, is given by: $HSG = 1Tc \times \left(\sum_{n=0}^8 2^n HPG_n \right)$ Tc: The input clock frequency in operating mode	Screen background color The horizontal display start position is specified by the 9 bits HPG8:0. The weight of the LSB is 1TC in QVGA mode, and the weight of the LSB is 2TC in WVGA mode This setting applies in screen units.
		1		
6	HPG6	0		
		1		
5	HPG5	0		
		1		
4	HPG4	0		
		1		
3	HPG3	0		
		1		
2	HPG2	0		
		1		
1	HPG1	0		
		1		
0	HPG0 (LSB)	0		
		1		

*: This register is set to the all bits zero state when the IC is reset by the RST pin.

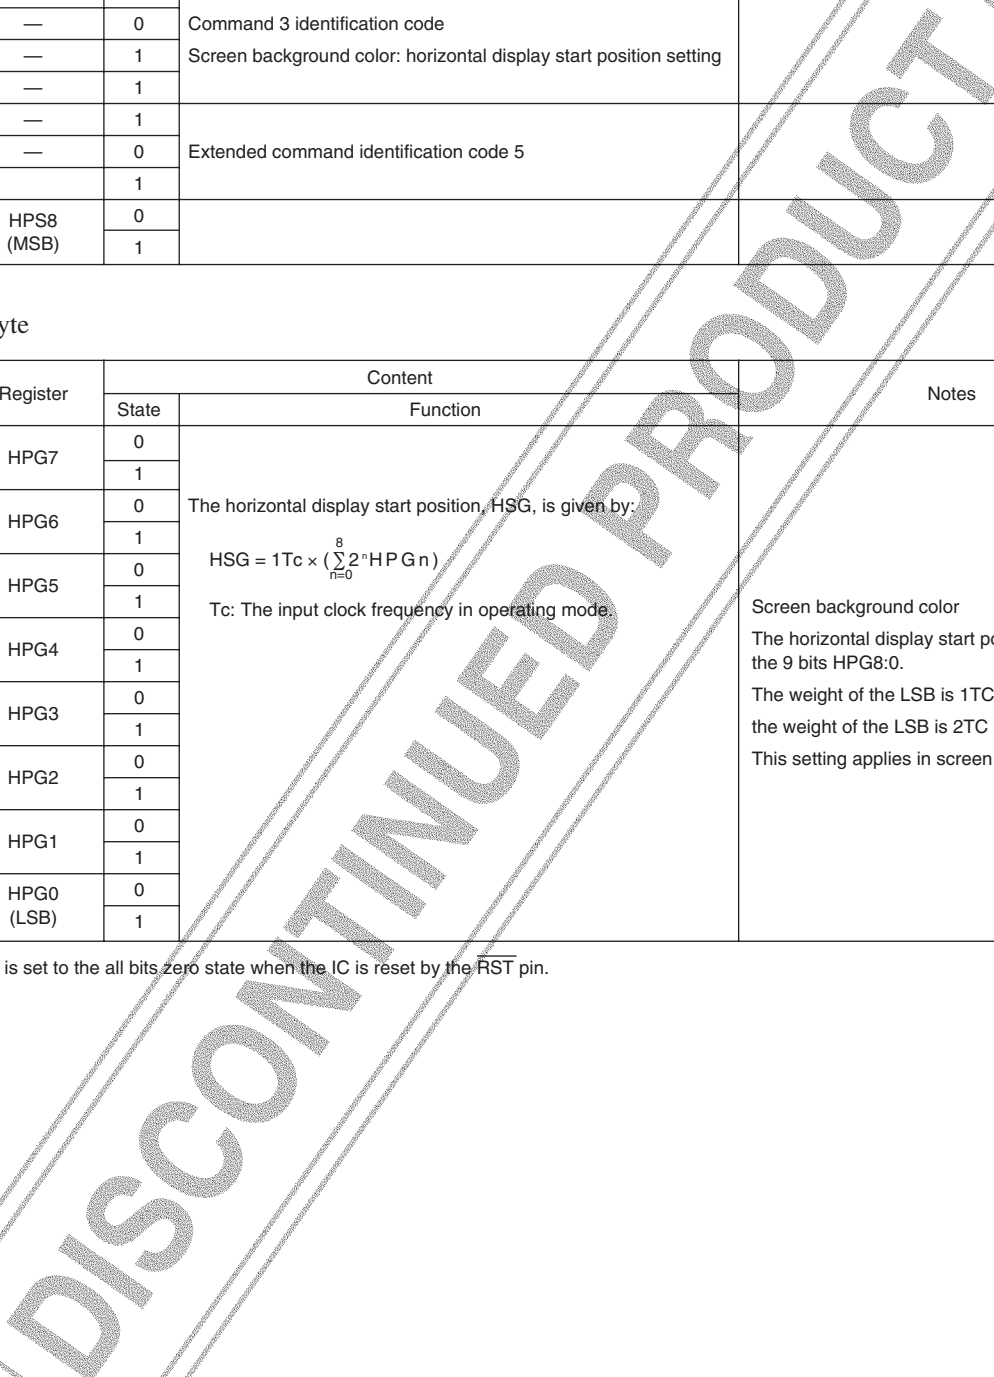

Command 40 (Character size control setting command)


• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1		
6	—	1	Command 4 identification code	
5	—	0	Display character data write settings	
4	—	0		
3	—	0	Extended command identification code 0	
2	—	0		
1	—	0		
0	—	0		

• Second byte

DA0 to 7	Register	Content				Notes
		State	Function			
7	—	0				
6	—	0				
5	—	0				
4	—	0				
3	SZV1	0	SZV1	SZV0	Character size	Specifies the character size in the vertical direction. This setting applies in line units.
		1	0	0	1×	
2	SZV0	0	0	1	2×	
		1	1	1	4×	
1	SZH1	0	SZH1	SZH0	Character size	Specifies the character size in the horizontal direction. This setting applies in line units.
		1	0	0	1×	
0	SZH0	0	0	1	2×	
		1	1	1	4×	

*: This register is set to the all bits zero state when the IC is reset by the RST pin.

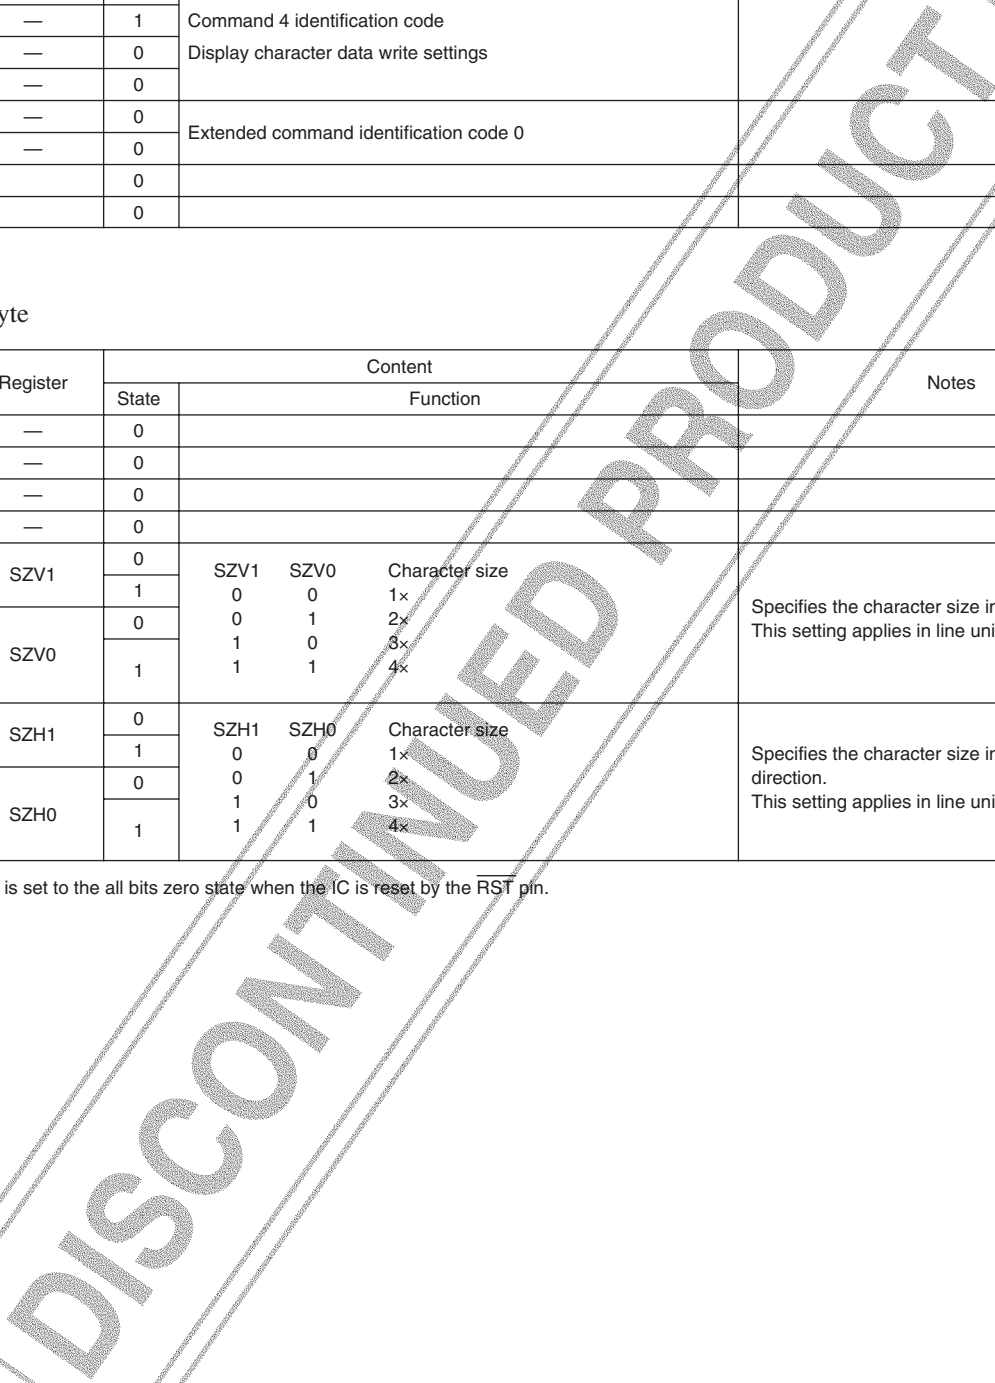


Command 41 (Character size line U control setting command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 4 identification code Character size line U control Extended command identification code 1	
6	—	1		
5	—	0		
4	—	0		
3	—	0		
2	—	1		
1	—	0		
0	—	0		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	LSZ7	0	Do not set for line 8.	Character size line setting control Upper lines
		1	Set for line 8.	
6	LSZ6	0	Do not set for line 7.	
		1	Set for line 7.	
5	LSZ5	0	Do not set for line 6.	
		1	Set for line 6.	
4	LSZ4	0	Do not set for line 5.	
		1	Set for line 5.	
3	LSZ3	0	Do not set for line 4.	
		1	Set for line 4.	
2	LSZ2	0	Do not set for line 3.	
		1	Set for line 3.	
1	LSZ1	0	Do not set for line 2.	
		1	Set for line 2.	
0	LSZ0	0	Do not set for line 1.	
		1	Set for line 1.	

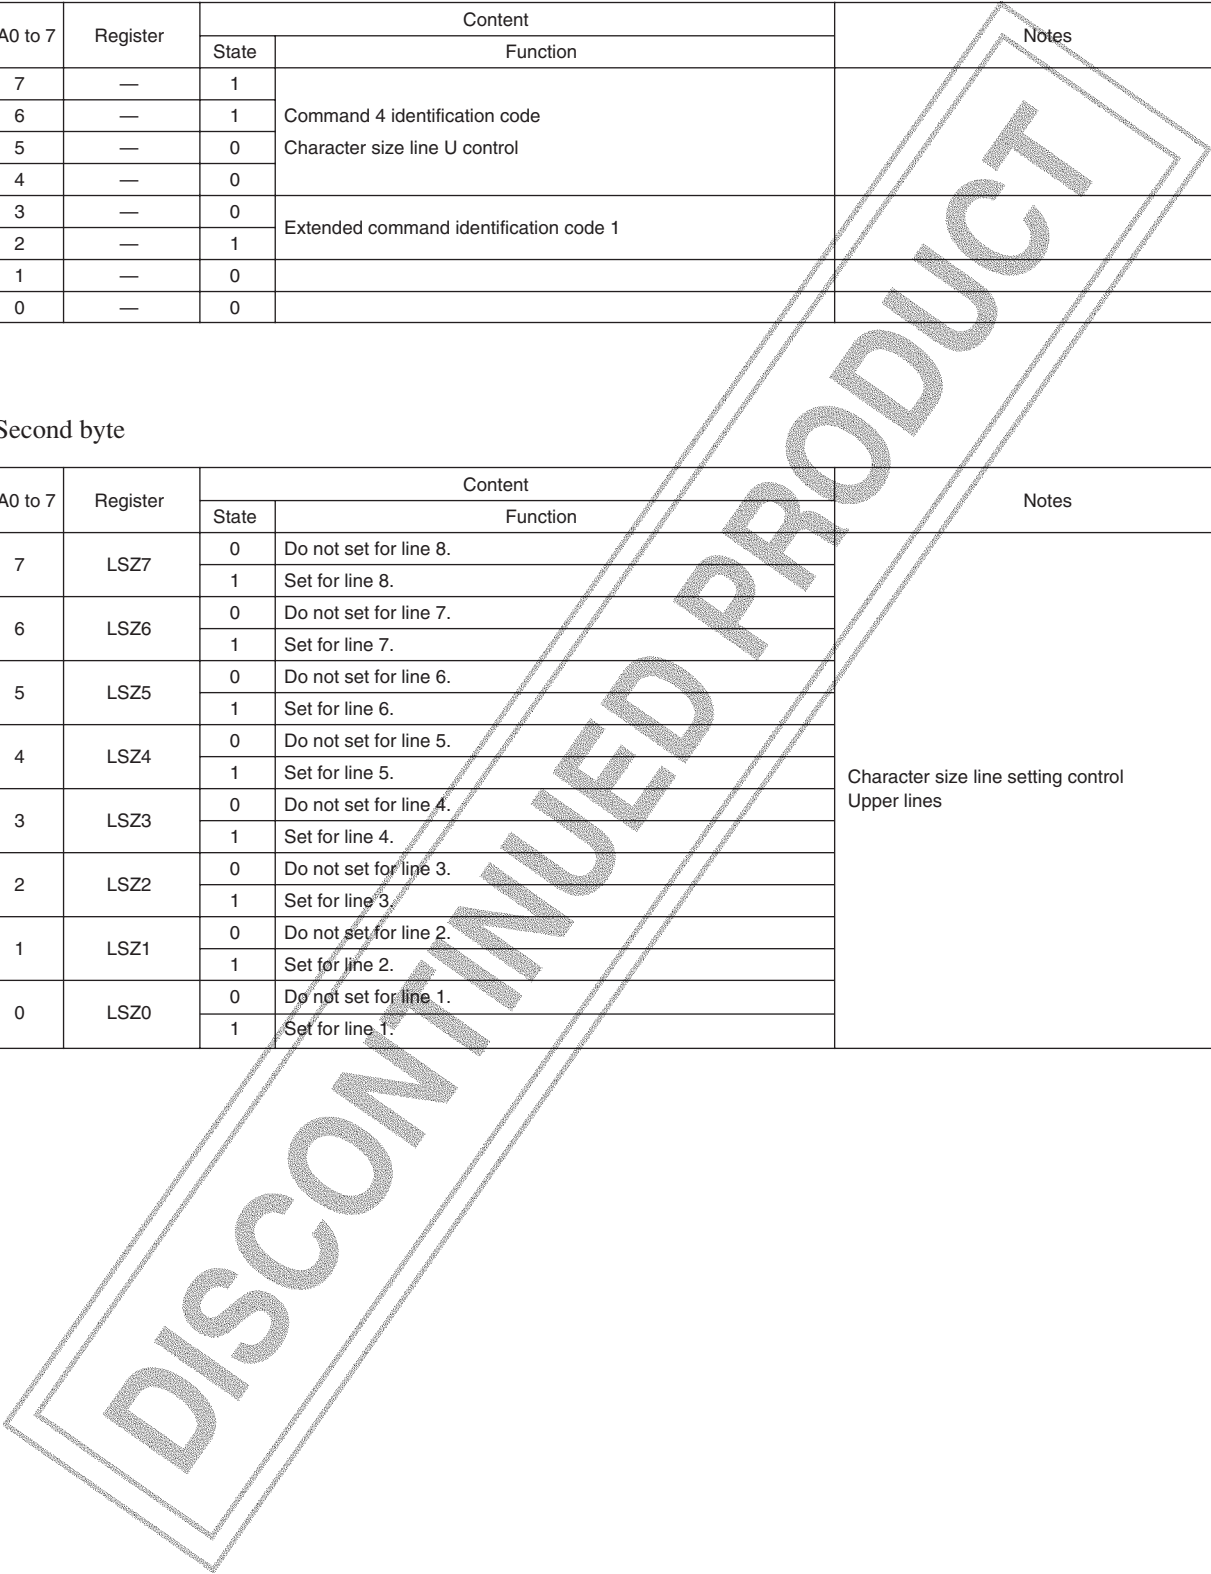


Command 42 (Character size line D control setting command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 4 identification code	
6	—	1		
5	—	0		
4	—	0		
3	—	1	Extended command identification code 2	
2	—	0		
1	—	0		
0	—	0		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	LSZ15	0	Do not set for line 16.	Character size line setting control Lower lines
		1	Set for line 16.	
6	LSZ14	0	Do not set for line 15.	
		1	Set for line 15.	
5	LSZ13	0	Do not set for line 14.	
		1	Set for line 14.	
4	LSZ12	0	Do not set for line 13.	
		1	Set for line 13.	
3	LSZ11	0	Do not set for line 12.	
		1	Set for line 12.	
2	LSZ10	0	Do not set for line 11.	
		1	Set for line 11.	
1	LSZ9	0	Do not set for line 10.	
		1	Set for line 10.	
0	LSZ8	0	Do not set for line 9.	
		1	Set for line 9.	

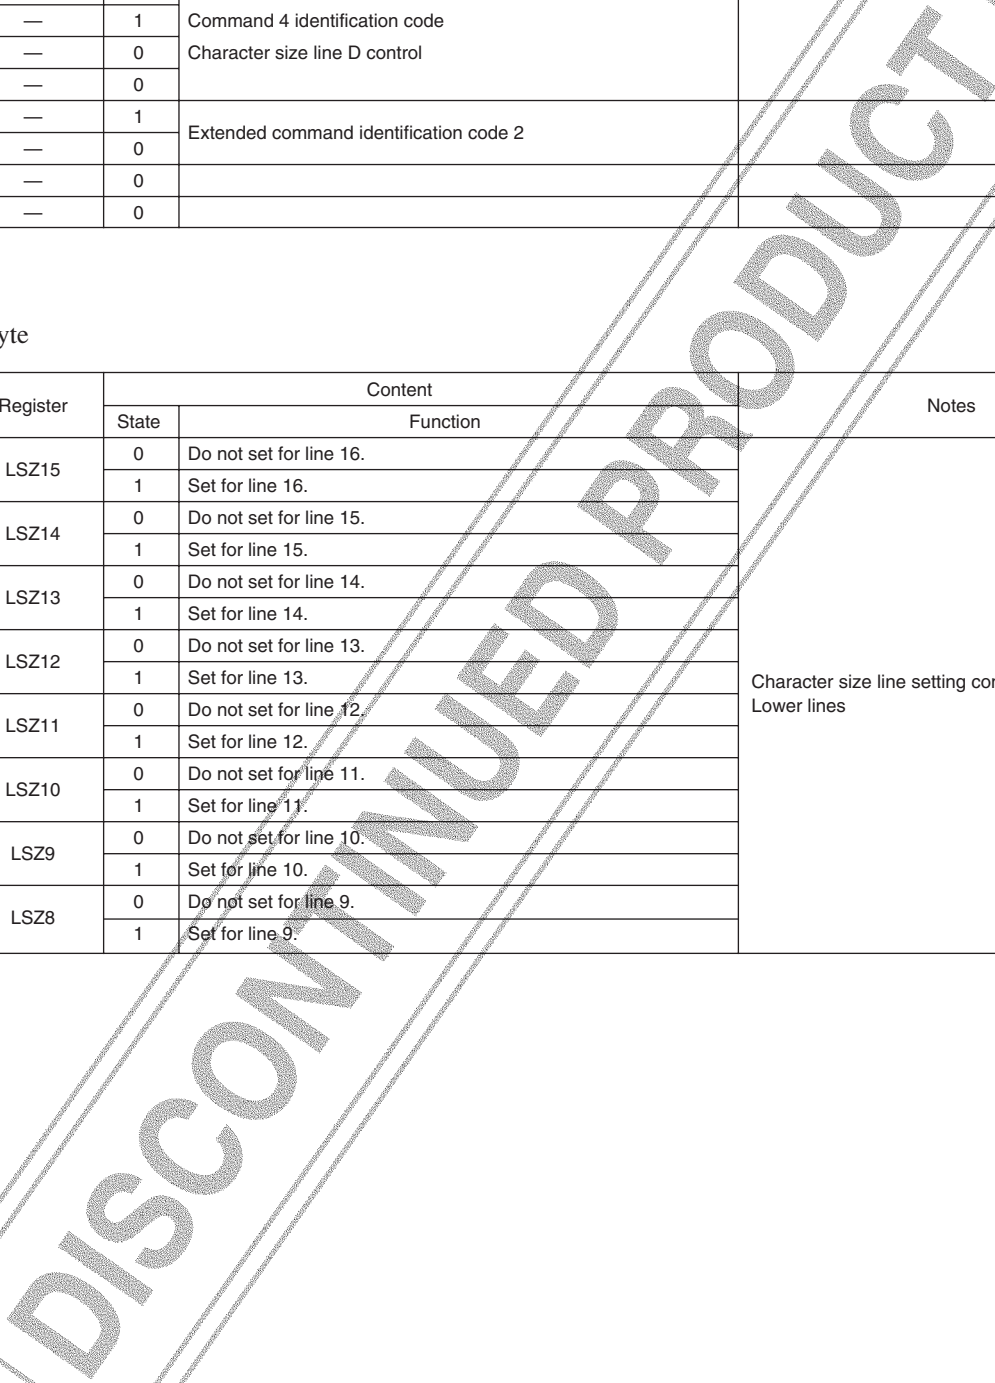

Command 50 (Box control: U setting command)


• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 5 identification code	
6	—	1		
5	—	0		
4	—	1		
3	—	0	Extended command identification code 0	
2	—	0		
1	—	0		
0	—	0		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	BXUW	0	Box display: upper side is 1 dot.	Box display: upper side Dot width. This setting applies in line units.
		1	Box display: upper side is 2 dot.	
6	BXLW	0	Box display: left side is 1 dot.	Box display: left side Dot width. This setting applies in line units.
		1	Box display: left side is 2 dot.	
5	—	0		
4	BXUCT0	0	Color table No. 1	Box display: upper side Color table specification This setting applies in line units.
		1	Color table No. 2	
3	BXUC3	0	Box display: upper side color specification 0000 to 1111 0 to F (hexadecimal)	Box display: upper side Color specification This setting applies in line units.
		1		
2	BXUC2	0		
		1		
1	BXUC1	0		
		1		
0	BXUC0	0		
		1		

*: This register is set to the all bits zero state when the IC is reset by the RST pin.

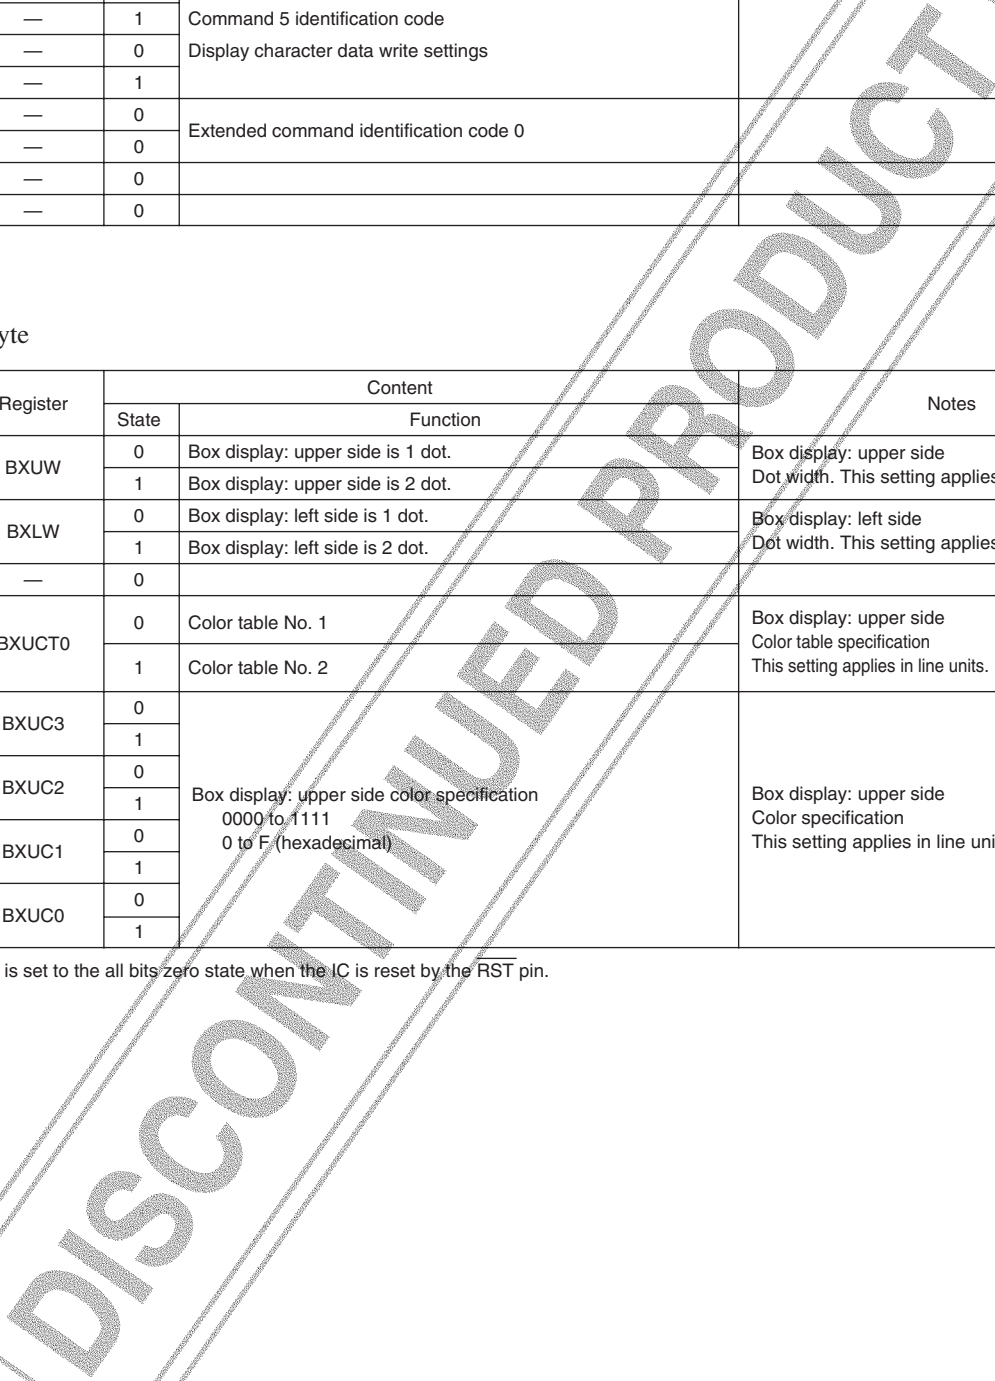

Command 51 (Box control: D setting command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 5 identification code	
6	—	1		
5	—	0		
4	—	1		
3	—	0	Extended command identification code 1	
2	—	1		
1	—	0		
0	—	0		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	BXDW	0	Box display: lower side is 1 dot.	Box display: lower side Dot width. This setting applies in line units.
		1	Box display: lower side is 2 dot.	
6	BXRW	0	Box display: right side is 1 dot.	Box display: right side Dot width. This setting applies in line units.
		1	Box display: right side is 2 dot.	
5	—	0		
4	BXDC0	0	Color table No. 1	Box display: lower side Color table specification This setting applies in line units.
		1	Color table No. 2	
3	BXDC3	0	Box display: lower side color specification 0000 to F111 0 to F (hexadecimal)	Box display: lower side Color specification This setting applies in line units.
		1		
2	BXDC2	0		
		1		
1	BXDC1	0		
		1		
0	BXDC0	0		
		1		

*: This register is set to the all bits zero state when the IC is reset by the RST pin.

Command 52 (Box control: U line setting command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 5 identification code	
6	—	1		
5	—	0		
4	—	1	Extended command identification code 2	
3	—	1		
2	—	0		
1	—	0		
0	—	0		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	LBX7	0	Do not set for line 8.	Box control line setting control Upper lines
		1	Set for line 8.	
6	LBX6	0	Do not set for line 7.	
		1	Set for line 7.	
5	LBX5	0	Do not set for line 6.	
		1	Set for line 6.	
4	LBX4	0	Do not set for line 5.	
		1	Set for line 5.	
3	LBX3	0	Do not set for line 4.	
		1	Set for line 4.	
2	LBX2	0	Do not set for line 3.	
		1	Set for line 3.	
1	LBX1	0	Do not set for line 2.	
		1	Set for line 2.	
0	LBX0	0	Do not set for line 1.	
		1	Set for line 1.	

DISCONTINUED PRODUCT


Command 53 (Character size: Line D control setting command)

• First byte

DA0 to 7	Register	Content		Notes	
		State	Function		
7	—	1	Command 5 identification code		
6	—	1			
5	—	0			Character size line D control
4	—	1			
3	—	1	Extended command identification code 3		
2	—	1			
1	—	0			
0	—	0			

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	LBX15	0	Do not set for line 16.	Box control line setting control Lower lines
		1	Set for line 16.	
6	LBX14	0	Do not set for line 15.	
		1	Set for line 15.	
5	LBX13	0	Do not set for line 14.	
		1	Set for line 14.	
4	LBX12	0	Do not set for line 13.	
		1	Set for line 13.	
3	LBX11	0	Do not set for line 12.	
		1	Set for line 12.	
2	LBX10	0	Do not set for line 11.	
		1	Set for line 11.	
1	LBX9	0	Do not set for line 10.	
		1	Set for line 10.	
0	LBX8	0	Do not set for line 9.	
		1	Set for line 9.	

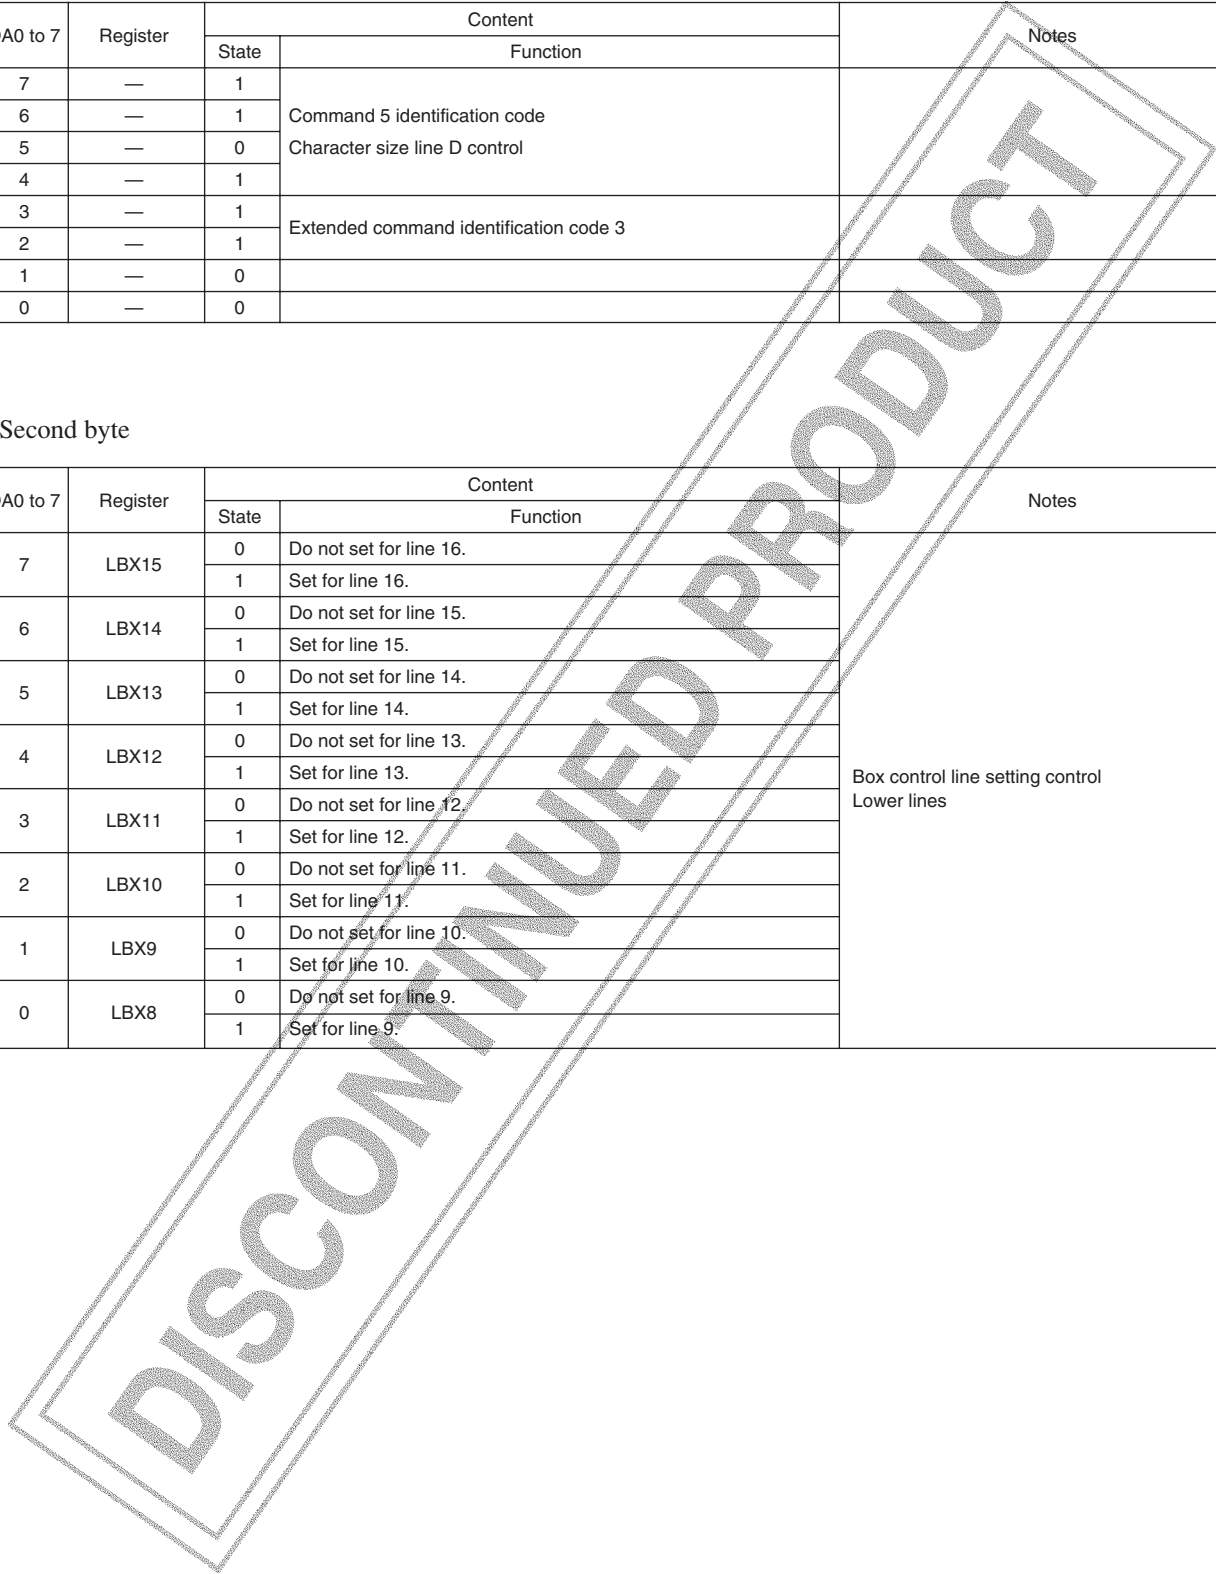

Command 60 (Border control settings command)


• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1		
6	—	1	Command 6 identification code	
5	—	1	Display character data write settings	
4	—	0		
3	—	0		
2	—	0	Extended command identification code 0	
1	BLK1	0	BLK1 BLK0	Border mode specification This setting applies in line units.
		1	0 0	
0	BLK0	0	0 1	
		1	1 0	
		1	1 1	Normal display Border Shadow 1 (lower side) Shadow 2 (lower and right sides)

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	0		
6	—	0		
5	—	0		
4	EGCT0	0	Color table No. 1	Border display Color table specification This setting applies in line units.
		1	Color table No. 2	
3	EGC3	0	Border display: color specification 0000 to 1111 0 to F (hexadecimal)	Border display color specification This setting applies in line units.
		1		
2	EGC2	0		
		1		
1	EGC1	0		
		1		
0	EGC0	0		
		1		

*: This register is set to the all bits zero state when the IC is reset by the RST pin.

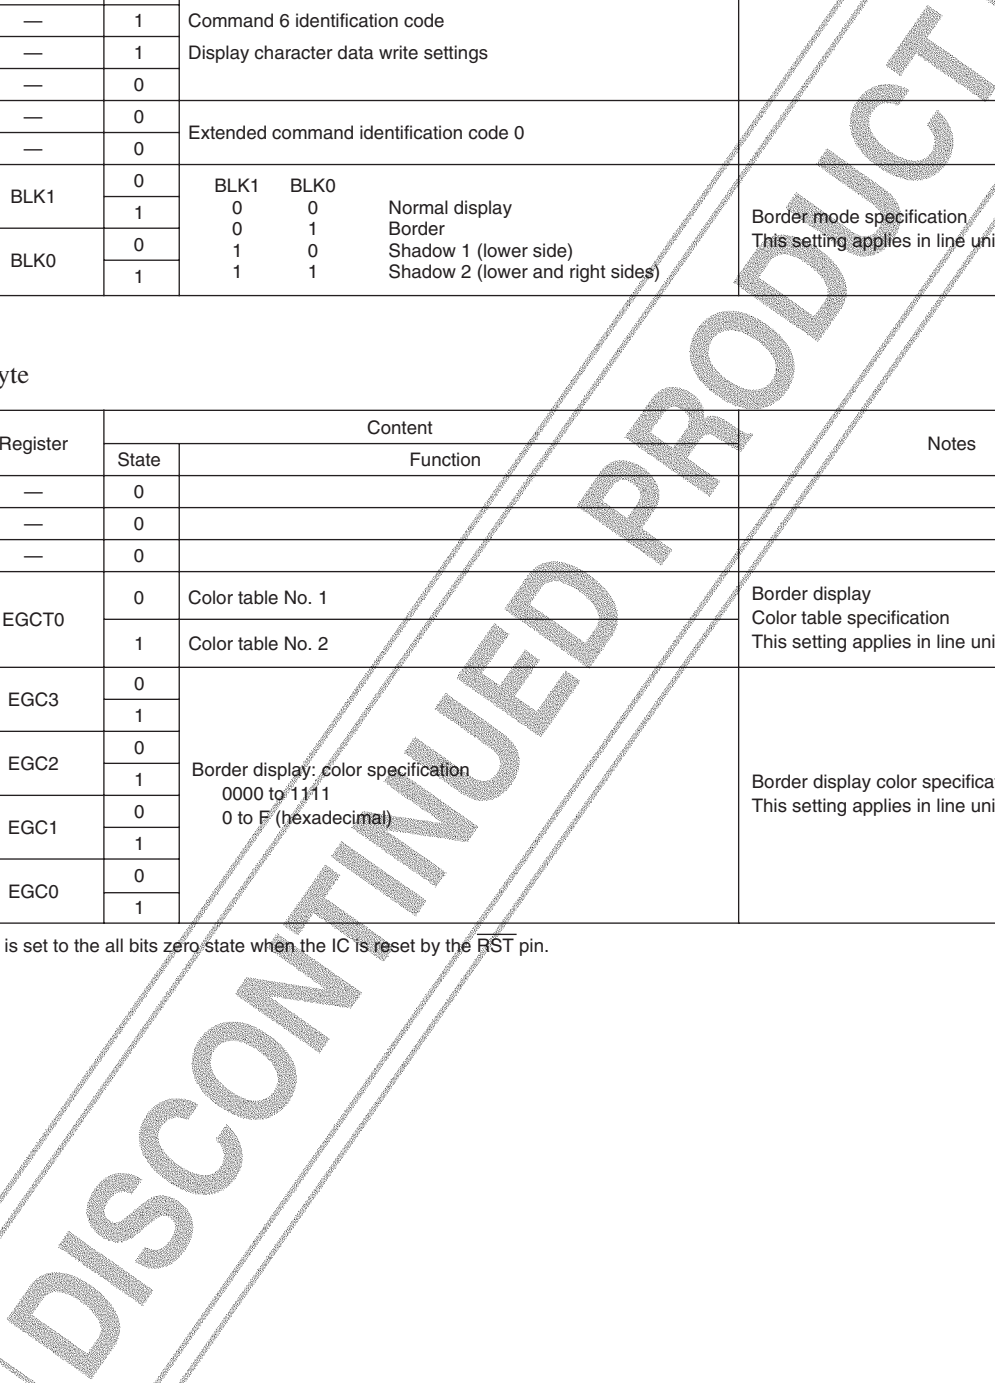

Command 61 (Border control U line settings command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1		
6	—	1	Command 6 identification code	
5	—	1	Character size: line U control	
4	—	0		
3	—	0		
2	—	1	Extended command identification code 1	
1	—	0		
0	—	0		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	LFC7	0	Do not set for line 8.	Border control line settings control Upper lines
		1	Set for line 8.	
6	LFC6	0	Do not set for line 7.	
		1	Set for line 7.	
5	LFC5	0	Do not set for line 6.	
		1	Set for line 6.	
4	LFC4	0	Do not set for line 5.	
		1	Set for line 5.	
3	LFC3	0	Do not set for line 4.	
		1	Set for line 4.	
2	LFC2	0	Do not set for line 3.	
		1	Set for line 3.	
1	LFC1	0	Do not set for line 2.	
		1	Set for line 2.	
0	LFC0	0	Do not set for line 1.	
		1	Set for line 1.	


Command 62 (Border control D line settings command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 6 identification code Character size: line D control	
6	—	1		
5	—	1		
4	—	0		
3	—	1	Extended command identification code 2	
2	—	0		
1	—	0		
0	—	0		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	LFC15	0	Do not set for line 16.	Border control line settings control Lower lines
		1	Set for line 16.	
6	LFC14	0	Do not set for line 15.	
		1	Set for line 15.	
5	LFC13	0	Do not set for line 14.	
		1	Set for line 14.	
4	LFC12	0	Do not set for line 13.	
		1	Set for line 13.	
3	LFC11	0	Do not set for line 12.	
		1	Set for line 12.	
2	LFC10	0	Do not set for line 11.	
		1	Set for line 11.	
1	LFC9	0	Do not set for line 10.	
		1	Set for line 10.	
0	LFC8	0	Do not set for line 9.	
		1	Set for line 9.	

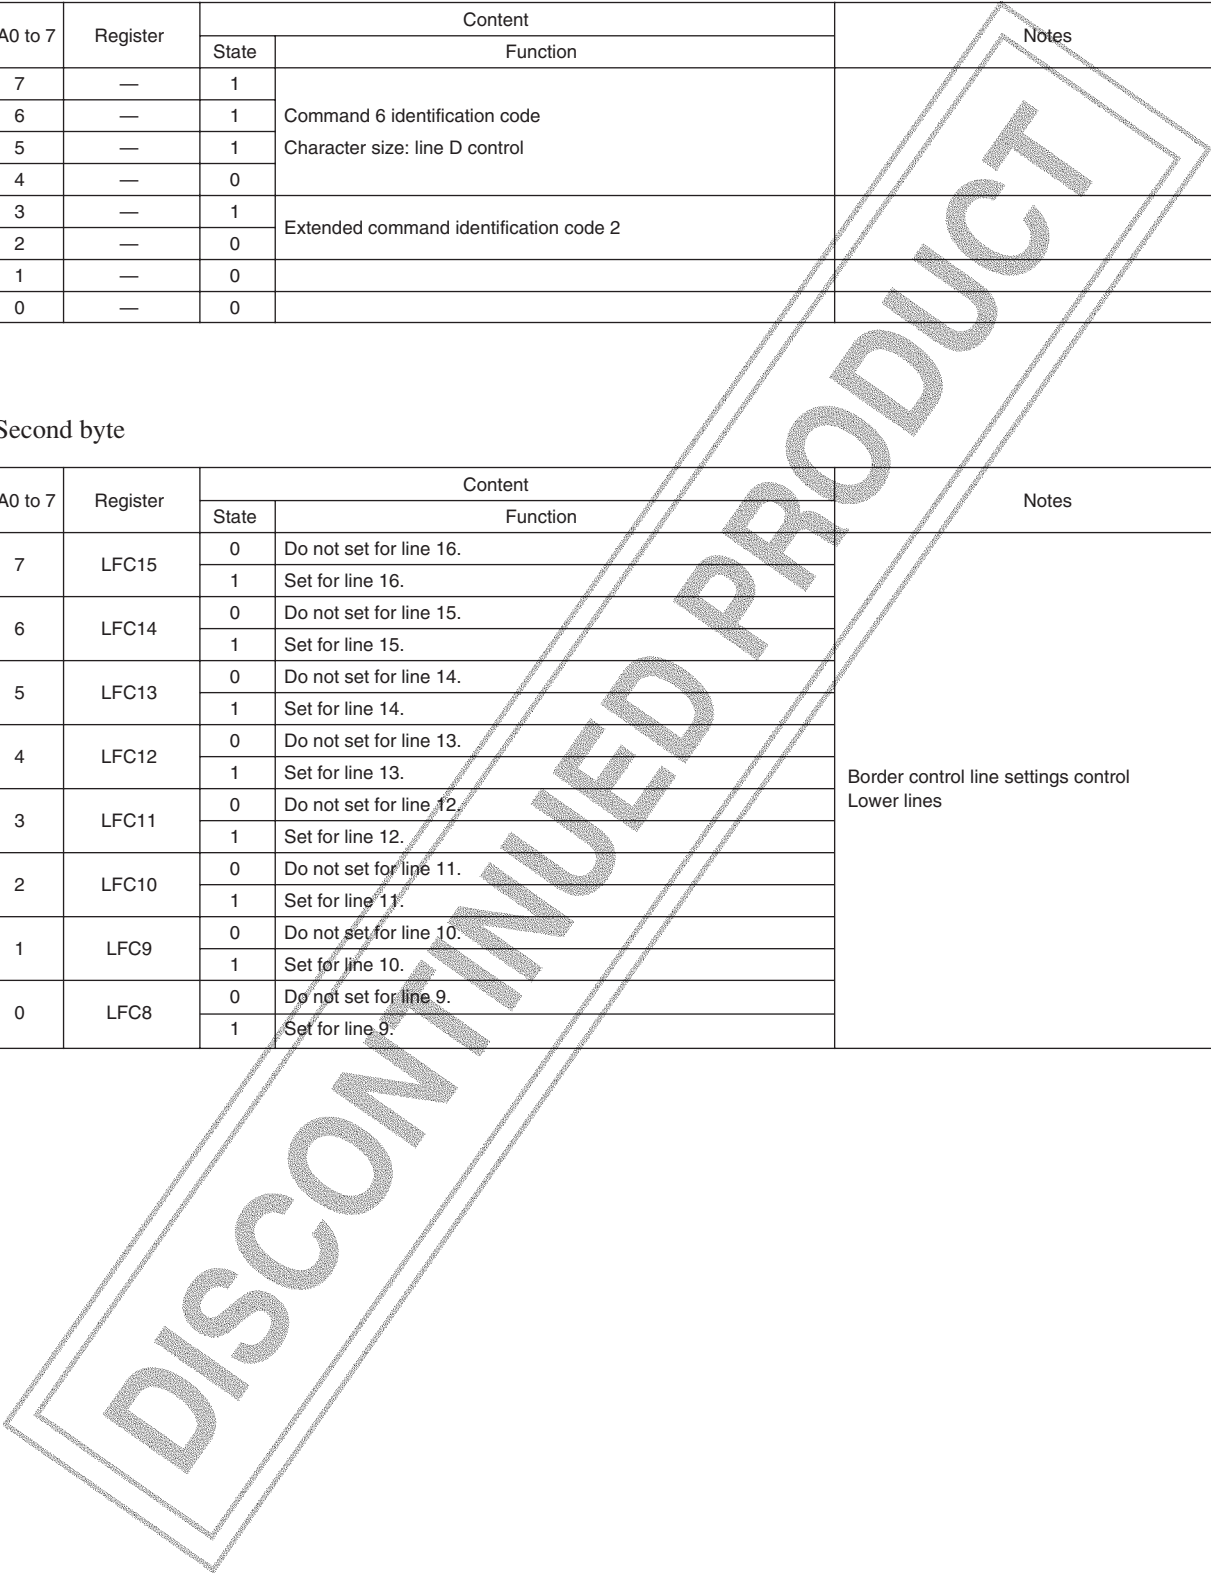

Command 70 (Color table write address setting command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1	Command 7 identification code	
6	—	1		
5	—	1		
4	—	1		
3	—	0	Sub-identifier code 0	
2	—	0		
1	—	0		
0	—	0		

• Second byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—			
6	—			
5	—			
4	CTN1	0	Color table No. 1 selected	Color table selection No. 1 or No. 2
		1	Color table No. 2 selected	
3	CTA3 <MSB>	0	Color table address 0 to 15 0 to F (hexadecimal) 16 values	Addresses of the color tables
		1		
2	CTA2	0		
		1		
1	CTA1	0		
		1		
0	CTA0 <LSB>	0		
		1		

Command 71 (Color table data write setting command)

• First byte

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	1		When this command has been issued, the IC remains in display character data write mode until the CS pin is set high.
6	—	1	Command 71 identification code	
5	—	1	Display character data write setting	
4	—	1		
3	—	0	Sub-identifier code 1	
2	—	1		
1	—	0		
0	RM3	0	RM3 Mode 0 [1][2] End	Continuous write mode selection
		1	1 [1][2] Continuous	

• Second byte (1)

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	0		Color table setting B
6	—	0		
5	—	0		
4	—	0		
3	TOK	0	Color	
		1	Transparent (BLK output: low)	
2	TB2	0	Color table B output 000 to 111 0 to 7 (hexadecimal)	
		1		
1	TB1	0		
		1		
0	TB0	0		
		1		

• Second byte (2)

DA0 to 7	Register	Content		Notes
		State	Function	
7	—	0		Color table setting G
6	—	0		
5	TG2	0	Color table G output 000 to 111 0 to 7 (hexadecimal)	
		1		
4	TG1	0		
		1		
3	TG0	0		
		1		
2	TR2	0	Color table R output 000 to 111 0 to 7 (hexadecimal)	
		1		
1	TR1	0		
		1		
0	TR0	0		
		1		

*: This register is set to the all bits zero state when the IC is reset by the RST pin.

When transparent is selected, the BLK output is set to the low level. (Transparent state)

The RGB outputs are values from the color table.

The transparent specification is best for color table 1, address 0000.

Since the data is set to all zeros by a RAM clear operation,

The RGB output will be 000 (black) and the BLK output will be 1.

Transparent is specified by setting the TOK bit to 1. (The BLK output will go to the low level.)

Display Structure

The display screen consists of a 40-character × 15-line grid.

QVGA mode (12 × 18 dot characters)

40-character × 13-line QVGA panel (480 × 234)


WVGA mode (12 × 16 dot characters)

33-character × 15-line WVGA panel (800 × 480)

Up to a maximum of 600 characters can be displayed.

If the character size is increased, the number of characters that can be displayed will decrease to be fewer than 600 characters.

Display memory is addressed by specifying a line address (0 to 14 (decimal) and a character position address (0 to 39 (decimal))).

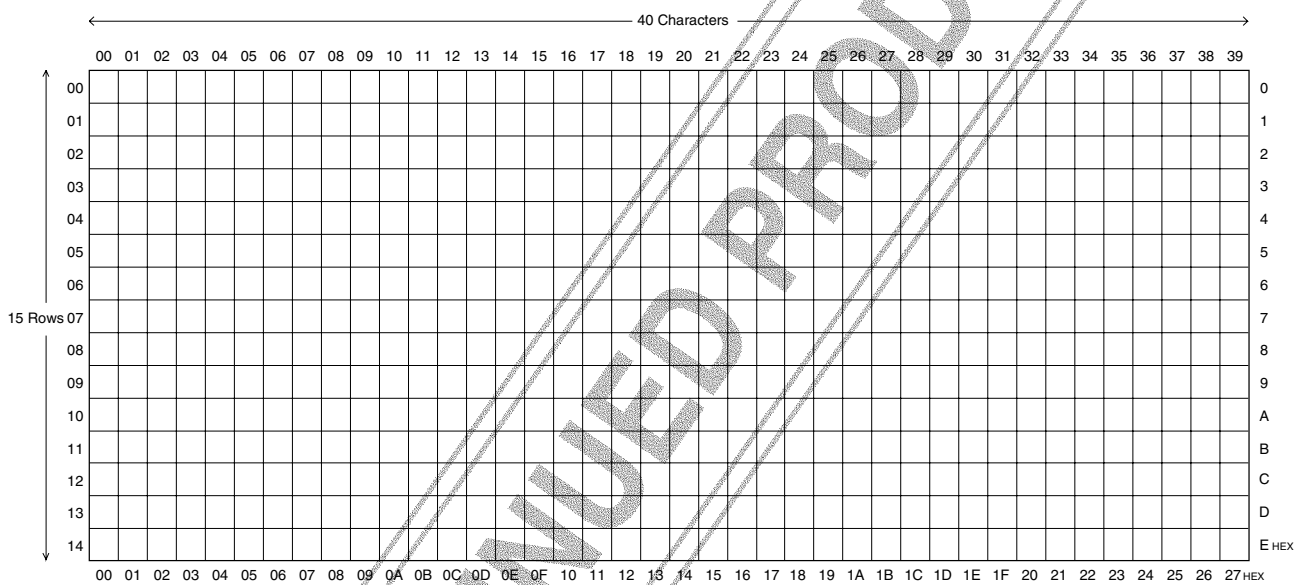

Display Structure (Display memory address)

Operational Description

Command transfer method


Overview

- (1) Commands are transferred in 8-bit units, LSB first.
Always send a first byte and a second byte (16 bits).
- (2) Command 10 (Main RAM write)
Command 11 (Wallpaper write)
Command 71 (Color table write)
When these commands specify continuous mode (RM2, 1 RM3), the IC is locked in continuous write mode.
(Continuous write mode is cleared by setting the CS pin high.)

Writing data to VRAM

- (1) Write start address specification
Use command 00 to set the write start address.
V3:0: Vertical direction, H5:0: Horizontal direction
- (2) Data write
Continuous write mode differs depending on the write mode specification. (RM1, RM2)
 - 1. Normal (RM2 = 0, RM1 = 0: initial state) *Continuous mode not used*
-- COM10-1 10-2-1 10-2-2 10-2-3 10-2-4 command wait state --
 - 2. Write continuous (RM2 = 0, RM1 = 1): Mode 2
COM10-1 ↑ 10-2-1 10-2-2 10-2-3 10-2-4
 - 3. Write continuous (RM2 = 1, RM1 = 0): Mode 3
COM10-1 10-2-1 10-2-2 10-2-3 10-2-4 ↑ 10-2-3 10-2-4
 - 4. Write continuous (RM2 = 1, RM1 = 1): Mode 4
COM10-1 10-2-1 10-2-2 10-2-3 10-2-4 ↑ 10-2-2 10-2-3 10-2-4

- *: In modes 2, 3, and 4, the IC remains locked in continuous write mode until the CS pin is set high.
 - The write address is automatically incremented.
 - The write address is retained unless the IC is reset or a new write address is issued.

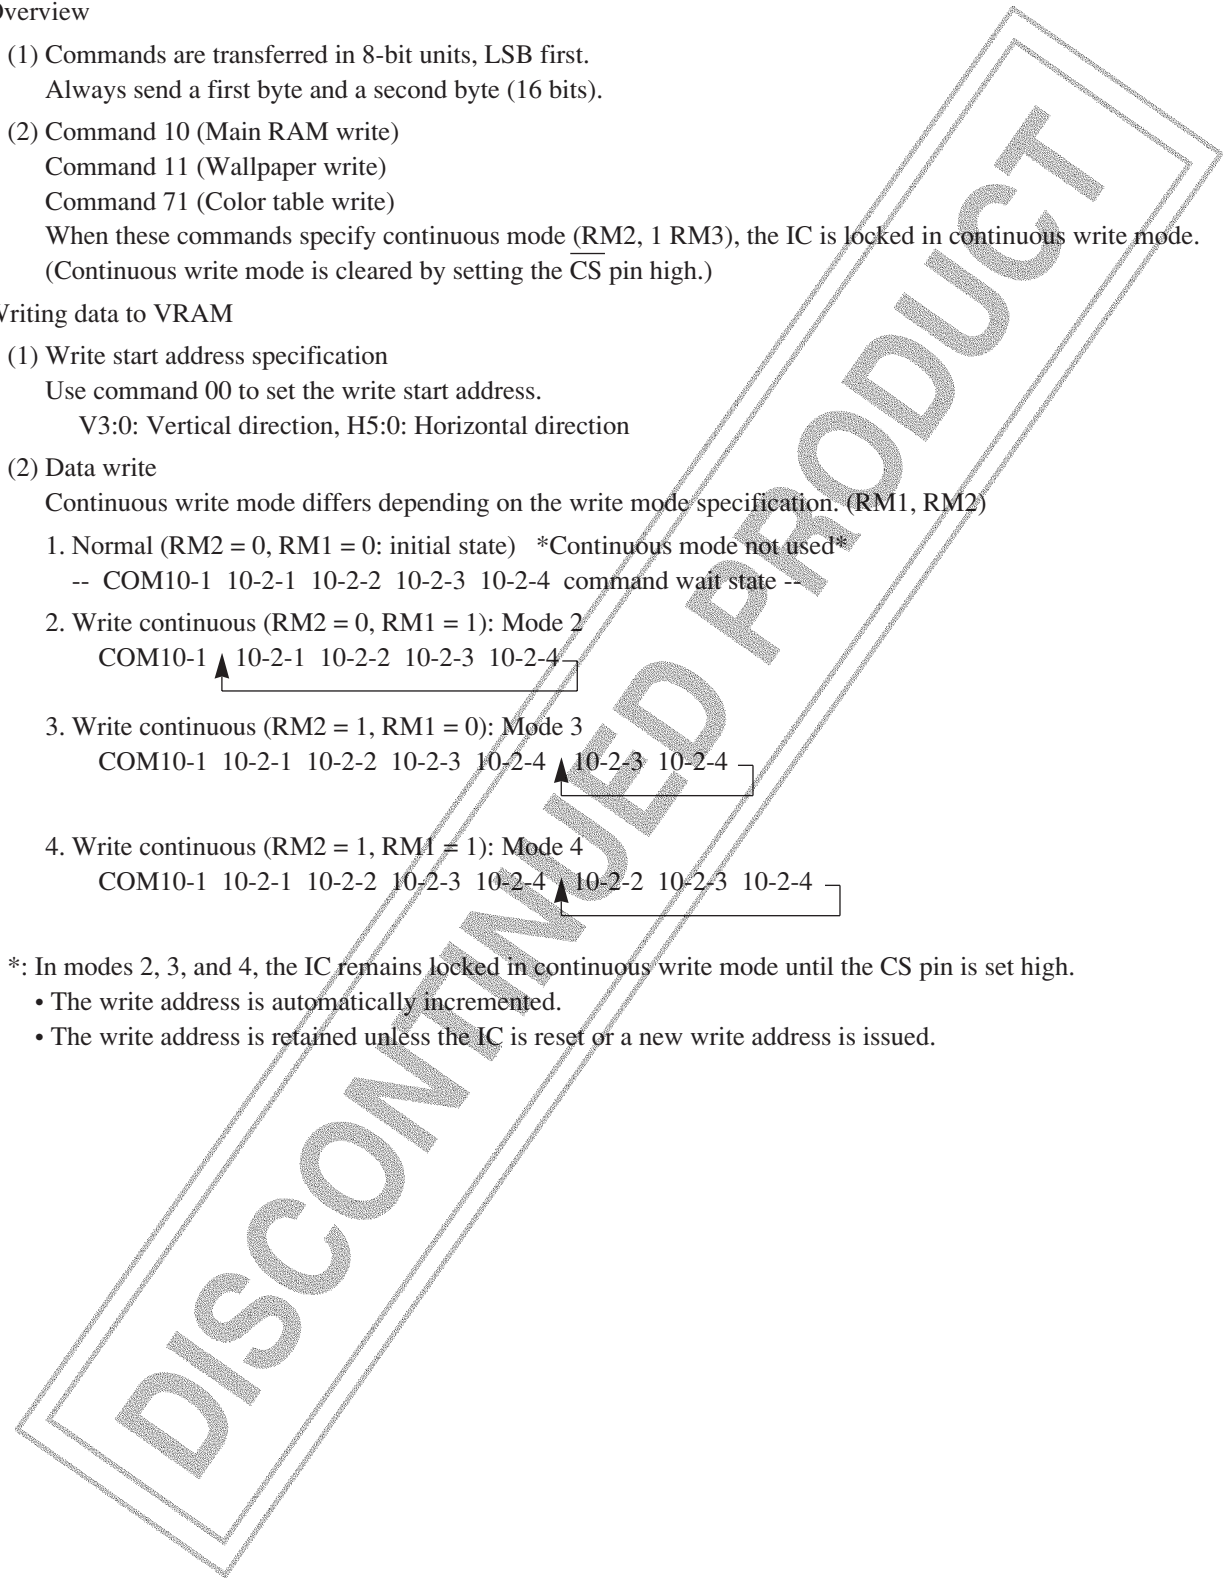


Color table write

(1) Write start address specification

Use command 70 to set the color table write start address.

CTN :1: Color table specification (No.1, No.2), CTA3:0: Address specification

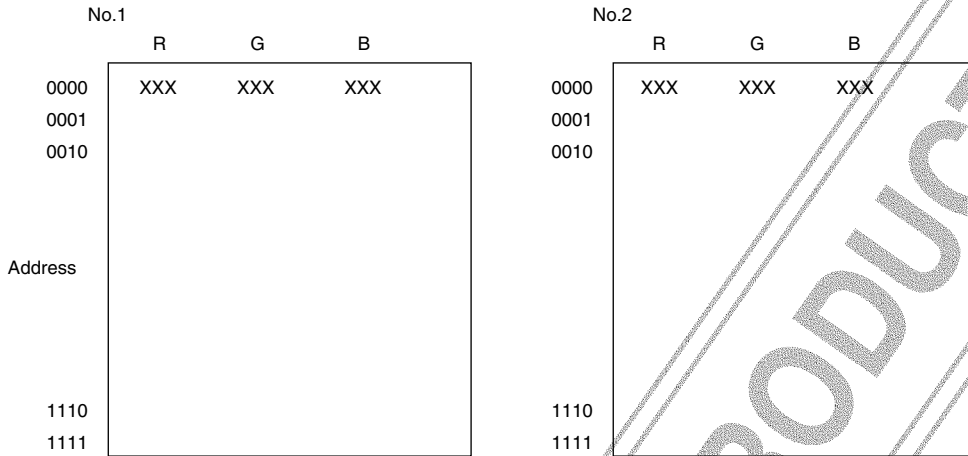


(2) Data write

Continuous write mode differs depending on the write mode specification. (RM3)

1. Normal (RM3 = 0: initial state) *Continuous mode not used*

-- COM71-1 71-2-1 71-2-2 command wait state ---

2. Write continuous (RM3 = 1) mode



*: In mode 2, the IC remains locked in continuous write mode until the CS pin is set high.

- The write address is automatically incremented.
- The write address is retained unless the IC is reset or a new write address is issued.

Display Format

Color specification related items

(1) When a character is specified


Color specification for the character color (character area) and character background color (outside the character area)

Character color: One of 16 colors

Character background color: One of 16 colors

Color tables: Table No. 1 or No. 2 specified by CT1:0. (COM1-2-3: VRAM)

→ One of 32 types

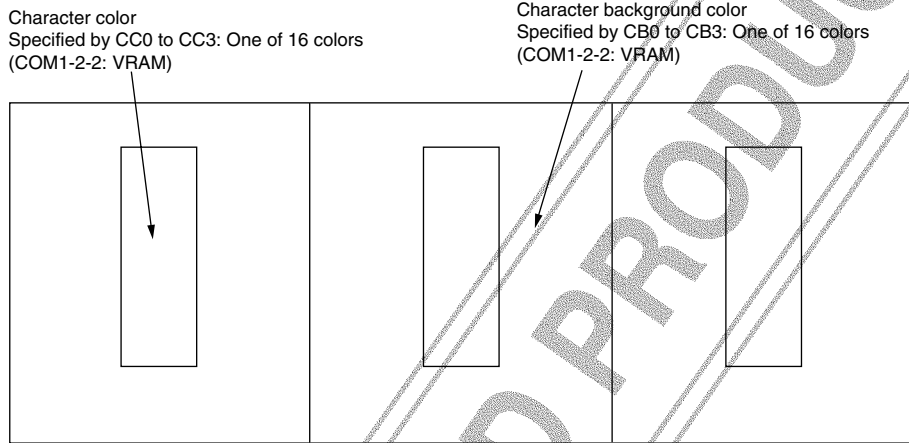


(2) When a graphic is specified

Color is specified in dot units (12×18 or 12×16)

One of 16 colors (FROM)

Color tables: Table No. 1 or No. 2 specified by CT1:0. (COM1-2-3: VRAM)


→ One of 32 types

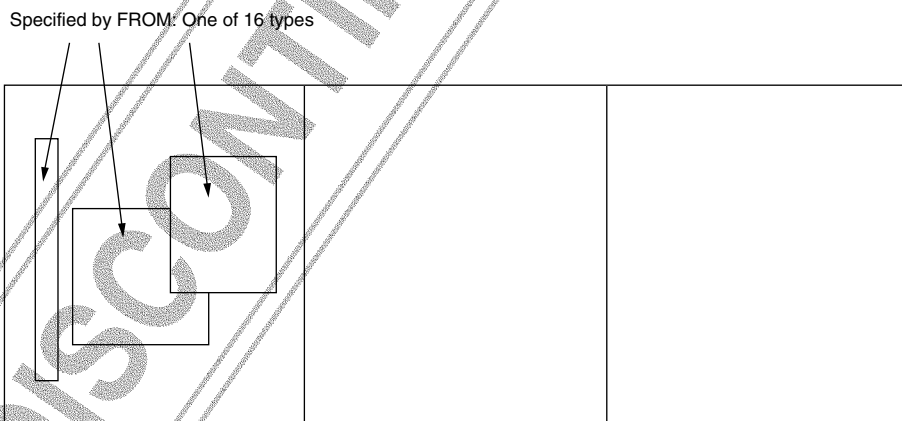

Display control related items

(1) Blinking: In character units

1. Normal at1 = 0 (COM1-2-1: VRAM)

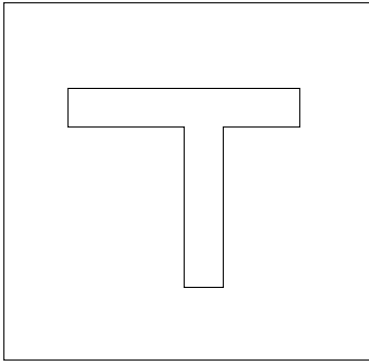


2. Blinking at1 = 1

Display alternates between normal and transparent with the blinking period. (COM21-2: BK1, 0)


(2) Border display: Only valid for font specified characters

1. Border color: One of 16 colors (COM60-2 EGC3 to 0)
Color table specification (COM60-2 EGCT0)
→ One of 32 types
2. Border mode control (COM60-1 BLK1, 0)


i. Border

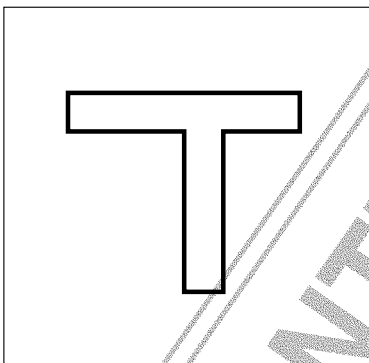

ii. Shadow 1: lower

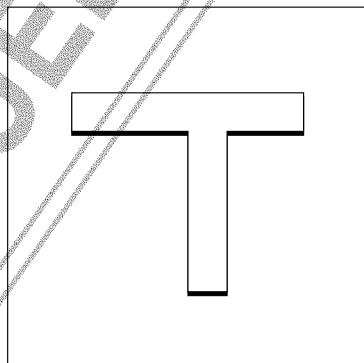


iii. Shadow 2: lower + right

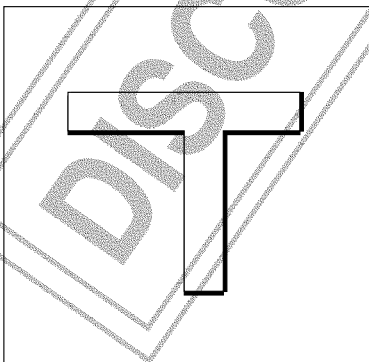

(3) Character size: Specified in line units


The character size is specified as 1x to 4x independently for the vertical and horizontal directions. (COM40-2)

Box display (raised/recessed)

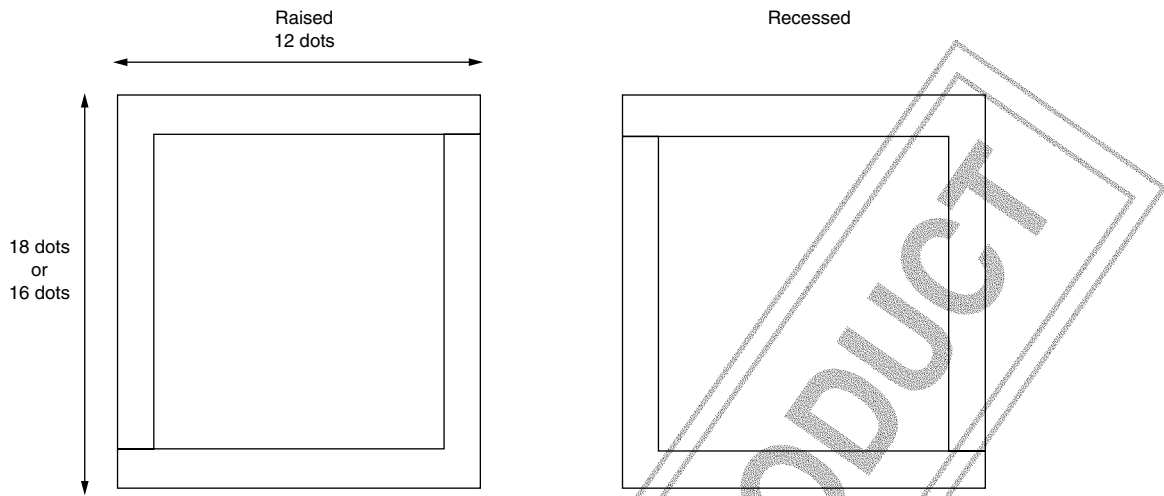

- (1) Raised/recessed specification: In character units (COM10-2-1 BXS)
- (2) Left side - displayed/undisplayed specification: in character units (COM10-2-1 BXL)
- (3) Right side - displayed/undisplayed specification: in character units (COM10-2-1 BXR)
- (4) Upper side - displayed/undisplayed specification: in character units (COM10-2-1 BXU)
- (5) Lower side - displayed/undisplayed specification: in character units (COM10-2-1 BXD)
- (6) Color specification: In line units
 - COM50 (Upper side)
 - COM51 (Lower side)
 - BXUC3:0: One of 16 colors
 - BXDC3:0: One of 16 colors
 - Color table specification
 - BXUCT0
 - BXDCT0
 - One of 32 types
- Dot width specification: 1 or 2 dots
 - Each of left, right, upper, and lower can be specified independently. (BXLW BXRW BXUW BXDW)


Screen structure

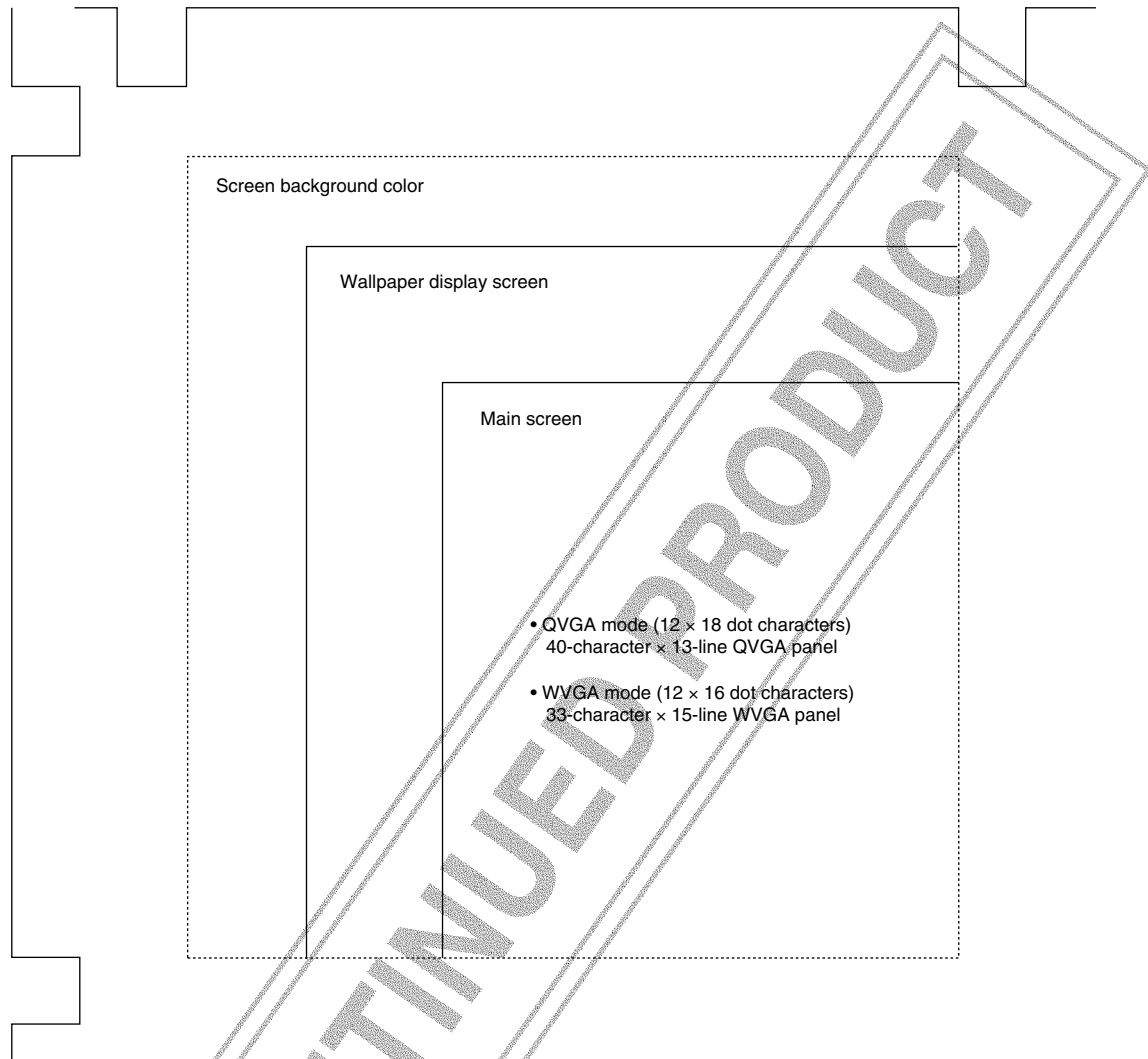


- For each screen: Display on/off (transparent) can be specified independently.
- For each screen: The display start position can be specified independently.
The wallpaper display screen and the main screen are displayed up to the horizontal direction start position. (The XXX clock is required.)

Display format

(1) QVGA

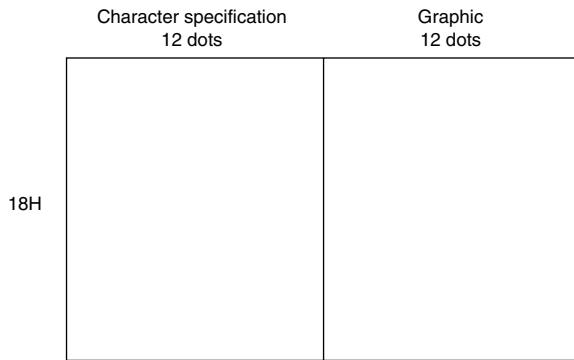

(2) WVGA

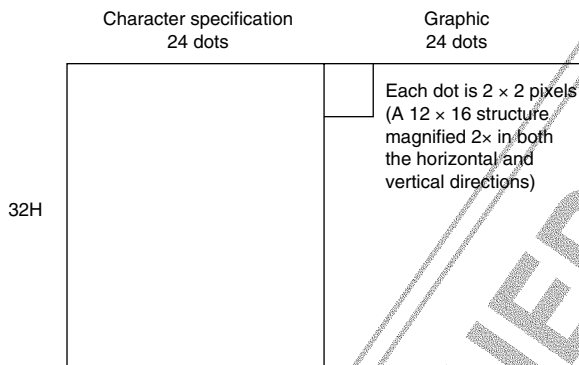

ROM structure

Internal ROM (512 characters)

(1) Character font

QVGA: 12 × 18-dot structure

WVGA: 24 × 32-dot structure, i.e. 12 × 16 times 4

(2) Graphics

CQVGA: 12 × 18-dot structure

WVGA: 12 × 16-dot structure, i.e. displayed magnified 2× in both the horizontal and vertical directions.

Note that the contents of ROM differs for QVGA and WVGA.

(That is, different ROMs for QVGA and WVGA must be created.)

External ROM (2048 characters)


(1) Conditions

Use a 16-bit 4M ROM with an access time less than 3 times the dot clock period

Example: DCLK = 50 MHz = 20 ns period × 3 = under 60 ns

DCLK = 10 MHz = 100 ns period × 3 = under 300 ns

(2) ROM map

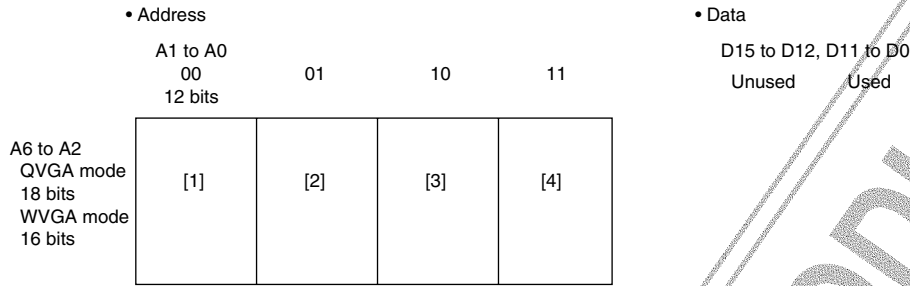

A17 to A7 (10 bits) = 2048 characters = character codes

(3) Display appearance

1. QVGA: 1 character = 12 × 18 dots

Character font: [1]


Graphics: [1] + [2] + [3] + [4]

2. WVGA: 1 character = 12 × 16 dots


Character font: [1] [2]

[3] [4]

Graphics: ([1] + [2] + [3] + [4]) displayed magnified 2× in both the horizontal and vertical directions.

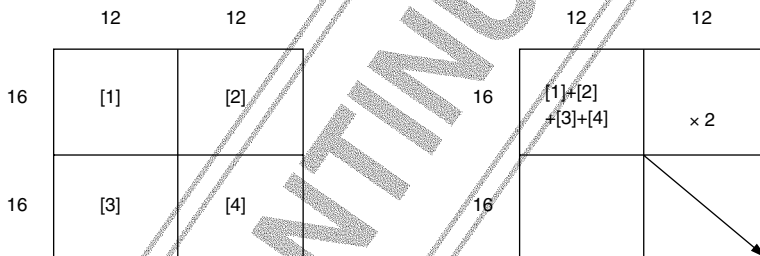

DISCONTINUED PRODUCT

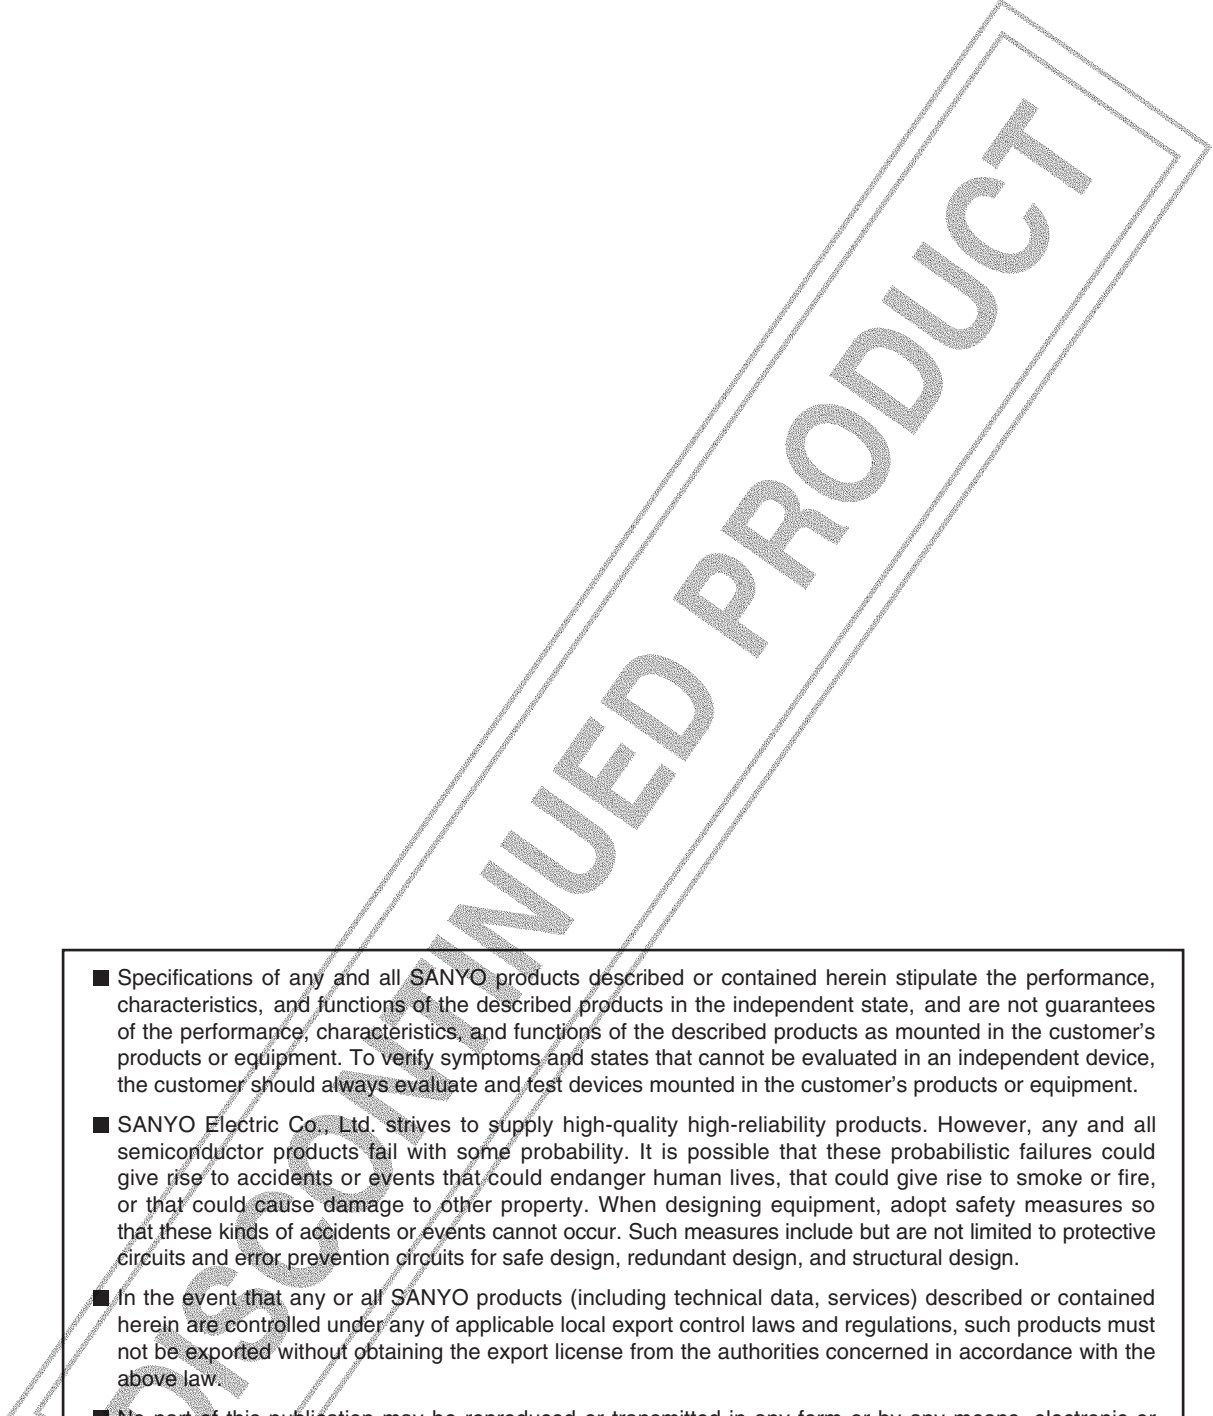- 
- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
 - SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
 - In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
 - No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
 - Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
 - Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of April, 2002. Specifications and information herein are subject to change without notice.