

AsahiKASEI
ASAHI KASEI MICRODEVICES

AP1011

9V Dual H-Bridge Motor Driver IC

General Description

The AP1011 includes 2 channel H-bridge drivers in one package. It also includes Under voltage Detection and Thermal Shut Down circuits. It is suitable for driving stepper motor and voice coil motors.

Features

- ☐ 2 channel H-bridge drivers in one package
- ☐ Power Supply Voltage Range
 - Control (VDD) : 2.7V~5.5V
 - Motor (VB) : 2.0V~7.0V (VDDmax=5.5V)
 - 2.0V~9.0V (VDDmax=3.6V)
- ☐ Output Current : 0.7A (DC), 1.4A (Peak)
- ☐ Low ON Resistance : $R_{DS(on)}$ (TOP+BOT)=0.54 Ω (TYP) @25°C or 0.72 Ω (TYP) @85°C
- ☐ Possible High Frequency PWM Pulse Input : max 200kHz
- ☐ Built in Flow-through Current Protection Circuit
- ☐ Built in Charge Pump Circuit
- ☐ Built in UVLO & TSD Circuits
- ☐ Package : 16pin 3mm × 3mm QFN

Block Diagram

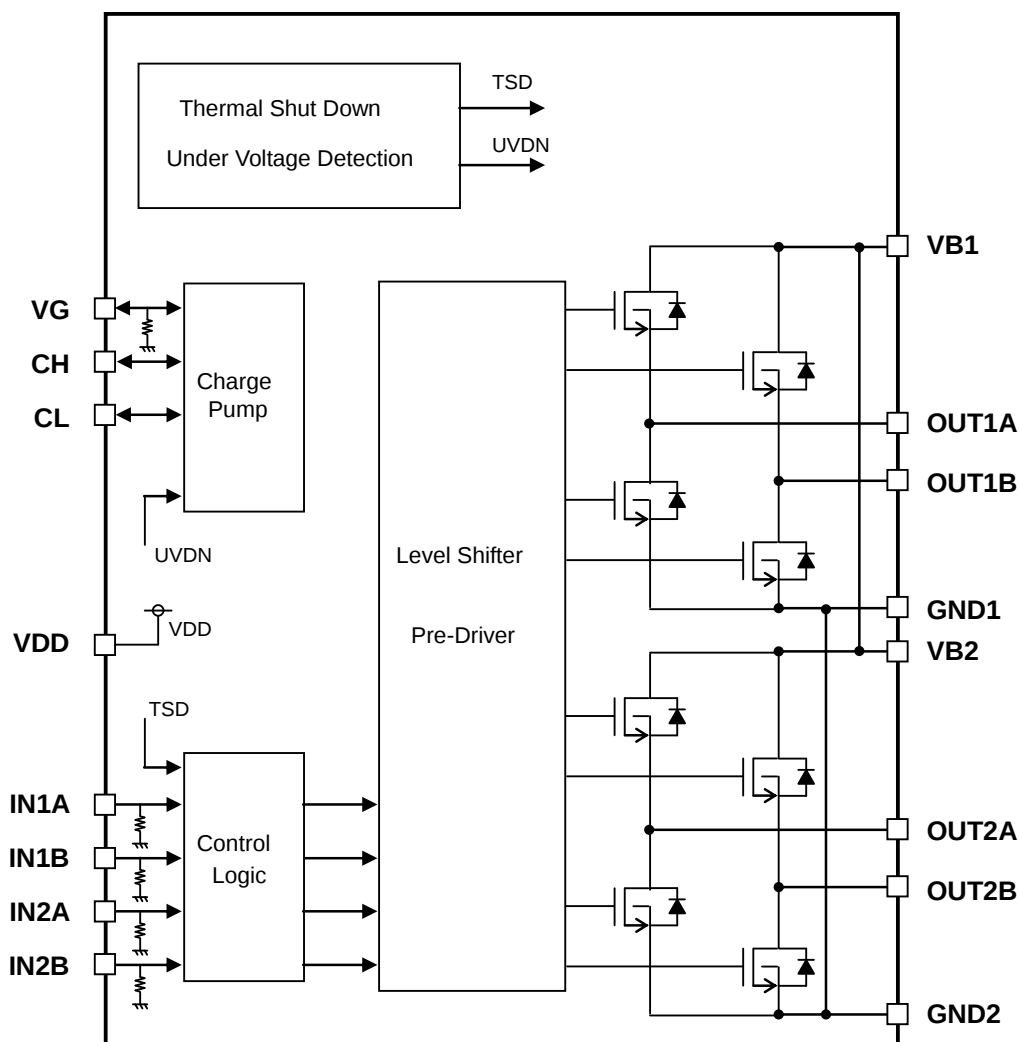


Fig1. Block diagram

☐ H-bridge driver block

NMOS type FETs are applied both high side and low side FETs of a H-bridge.

☐ Charge pump block

It generates the drive voltage (VG) of gate for a high side FET.

☐ Control logic block

Each H-bridge driver is controlled by two input signal IN1/2A or IN1/2B.

☐ Level shifter & pre-driver block

Control signals for the high side FET is shifted VG voltage and then drive the gate of the high side FET.

☐ Under Voltage Detection

It is monitoring the control voltage (VDD), if the VDD is less than the specified voltage, the output of the H-bridge goes to high impedance.

☐ Thermal Shut Down

If the temperature of the chip is more than the specified temperature, the output of the H-bridge goes to high impedance.

Absolute Maximum Ratings

Ta = 25°C unless otherwise specified.

Parameter	Symbol	Min	Max	Unit	Comments
Control supply voltage	VDD	-0.5	6.0	V	
Motor supply voltage1	VB1	-0.5	7.5	V	VDDmax=5.5V
Motor supply voltage 2	VB2	-0.5	9.4	V	VDDmax=3.6V
Input voltage 1 (IN1A, IN1B, IN2A, IN2B)	Vterm1	-0.5	VDD	V	
Input voltage 2 (OUT1A, OUT1B, OUT2A, OUT2B, CL)	Vterm2	-0.5	VB	V	
Input voltage 3 (CH, VG)	Vterm3	-0.5	13.5	V	
Maximum output current	Iload_dcr		1.0	A	Ta=25°C
Maximum output current	Iload_dch		0.7	A	Ta=85°C
Maximum output peak current	Iload_peak		1.4	A	(note3)
Power dissipation	PD_r		2.0	W	(note4), Ta=25°C
Power dissipation	PD_h		1.0	W	(note4), Ta=85°C
Storage temperature	Tstg	-40	150	°C	

(note1) All above voltage is defined to GND1/2=0V.

(note2) Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the products on the verge of suffering physical damages, and therefore products must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

(note3) The ON time must be less than 10ms and the ON time duty cycle must be less than 5%.

(note4) Assembly condition: When the 2-layer(pattern rate:150%) board is used. This is calculated $R_{\theta J}=60^{\circ}\text{C/W}$.

Recommended Operating Conditions

Ta = 25°C unless otherwise specified.

Parameter	Symbol	Min	Typ	Max	Unit	Comments
Motor supply voltage1	VB1	2.0	5.0	7.0	V	VDDmax=5.5V
Motor supply voltage 2	VB2	2.0	5.0	9.0	V	VDDmax=3.6V
Control supply voltage	VDD	2.7	3.0	5.5	V	
Input puls frequency	FIN			200	kHz	Duty=50%(input puls)
Ambient temperature	Ta	-40		85	°C	
Maximum junction temperature	Tj			150	°C	


(note1) All above voltage is defined to GND1/2=0V.

Control logic truth table

Protection detection		Input		Output	
UVDN	TSD	IN1A IN2A	IN1B IN2B	OUT1A OUT2A	OUT1B OUT2B
H	L	L	L	L	L
H	L	H	L	H	L
H	L	L	H	L	H
H	L	H	H	Hi-Z	Hi-Z
H	H	X	X		
L	X	X	X		

Package

1. Mecanical demensions : 16pin QFN package

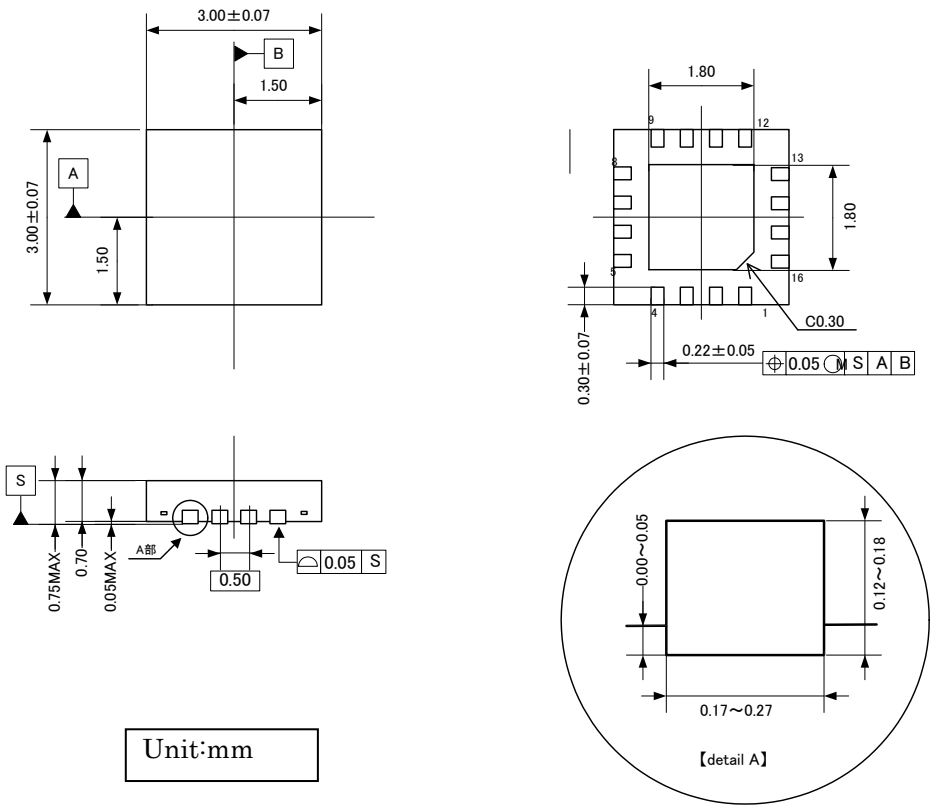

IMPORTANT NOTICE

- These products and their specifications are subject to change without notice. When you consider any use or application of these products, please make inquiries the sales office of Asahi Kasei Microdevices Corporation (AKM) or authorized distributors as to current status of the products.
- Descriptions of external circuits, application circuits, software and other related information contained in this document are provided only to illustrate the operation and application examples of the semiconductor products. You are fully responsible for the incorporation of these external circuits, application circuits, software and other related information in the design of your equipments. AKM assumes no responsibility for any losses incurred by you or third parties arising from the use of these information herein. AKM assumes no liability for infringement of any patent, intellectual property, or other rights in the application or use of such information contained herein.
- Any export of these products, or devices or systems containing them, may require an export license or other official approval under the law and regulations of the country of export pertaining to customs and tariffs, currency exchange, or strategic materials.
- AKM products are neither intended nor authorized for use as critical components^{Note1)} in any safety, life support, or other hazard related device or system^{Note2)}, and AKM assumes no responsibility for such use, except for the use approved with the express written consent by Representative Director of AKM. As used here:

Note1) A critical component is one whose failure to function or perform may reasonably be expected to result, whether directly or indirectly, in the loss of the safety or effectiveness of the device or system containing it, and which must therefore meet very high standards of performance and reliability.

Note2) A hazard related device or system is one designed or intended for life support or maintenance of safety or for applications in medicine, aerospace, nuclear energy, or other fields, in which its failure to function or perform may reasonably be expected to result in loss of life or in significant injury or damage to person or property.

- It is the responsibility of the buyer or distributor of AKM products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the above content and conditions, and the buyer or distributor agrees to assume any and all responsibility and liability for and hold AKM harmless from any and all claims arising from the use of said product in the absence of such notification.