



FEATURES

- 50, 100, 200 & 300 Turn variants
- Primary current rating to 10A
- Primary to secondary isolation 500VDC
- 20kHz-200kHz frequency range
- Centre tapped variants available

DESCRIPTION


The 5600 series of current sense transformers are designed to control, measure, or monitor ac currents. The transformers can be used as feedback elements between the output and pulse control circuitry providing regulation of switched mode power supplies, other applications include, motor current load/overload, lighting and instrumentation.



SELECTION GUIDE				
Order Code	Number of Turns	Inductance Range	DC Resistance	Terminating Resistance to Produce 1VOUT/1AIN
	±1 Turn	Pins 1&3, 5kHz	Pins 1&3, Ω	Ω ±5%
56050	50	5.00 - 9.30mH @1V	0.133 - 0.199	50
56100	100	20.0 - 37.0mH @1V	0.93 - 1.40	100
56200	200	80.0 - 150mH @2V	1.87 - 2.81	200
56300	300	180 - 335mH @3V	5.73 - 8.59	300
56T100	100CT	20.0 - 37.0mH @1V	0.93 - 1.40	100
56T200	200CT	80.0 - 150mH @2V	1.87 - 2.81	200
56T300	300CT	180 - 335mH @3V	5.73 - 8.59	300

ABSOLUTE MAXIMUM RATINGS	
Operating free air temperature range	-40°C to 85°C
Storage temperature range	-40°C to 125°C

PACKAGE DETAILS			
Order Code	TYP Weight (g)	Packaging Style	QTY
56XXX	5.7	Tube	25

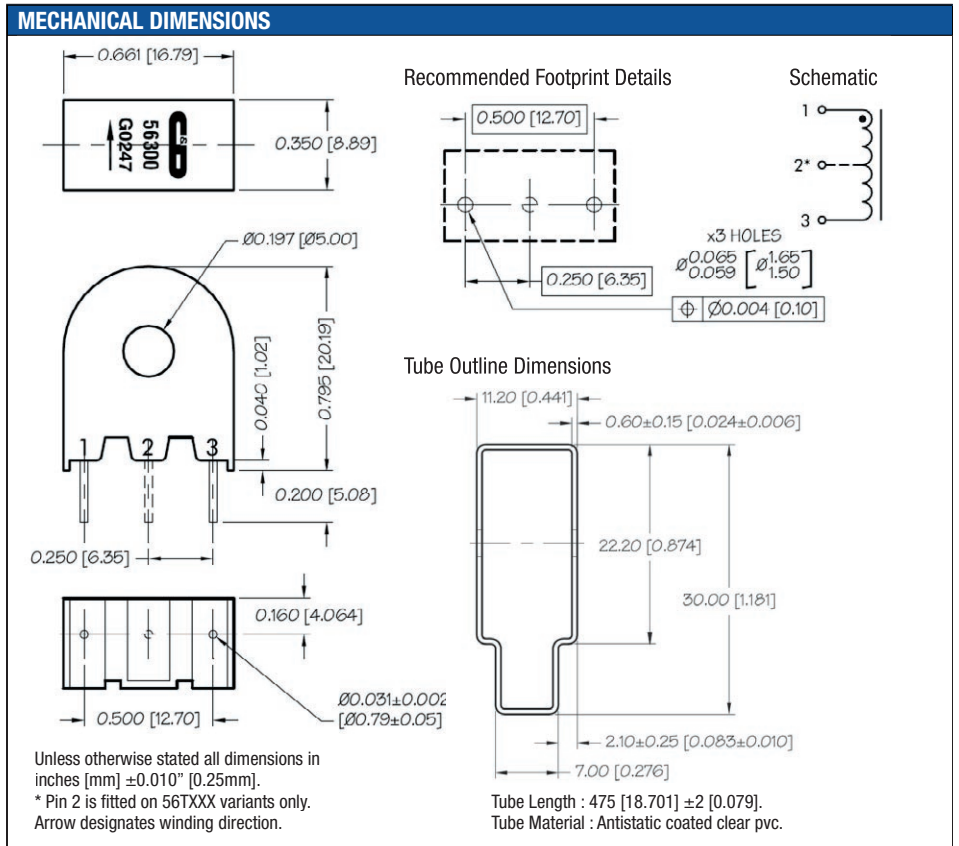

C&D Technologies (NCL) Limited reserve the right to alter or improve the specification, internal design or manufacturing process at any time, without notice. Please check with your supplier or visit our web site to ensure that you have the current and complete specification for your product before use.

© C&D Technologies (NCL) Limited 2005

No part of this publication may be copied, transmitted or stored in a retrieval system or reproduced in any way including, but not limited to, photography, photocopy, magnetic or other recording means, without prior written permission from C&D Technologies (NCL) Limited. Instructions for use are available from www.cd4power.com

C&D Technologies (NCL) Ltd
Tanners Drive, Blakelands North
Milton Keynes MK14 5BU, England

Tel: +44 (0)1908 615232
Fax: +44 (0)1908 617545
email: info@cdtechno-ncl.com

C&D Technologies, Inc.
3400 E Britannia Drive, Tucson,
Arizona 85706, USA

Tel: +1 (800) 547-2537
Fax: +1 (520) 741-4598
email: pedmktg@cdtechno.com