


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	05/06/02	D.N.

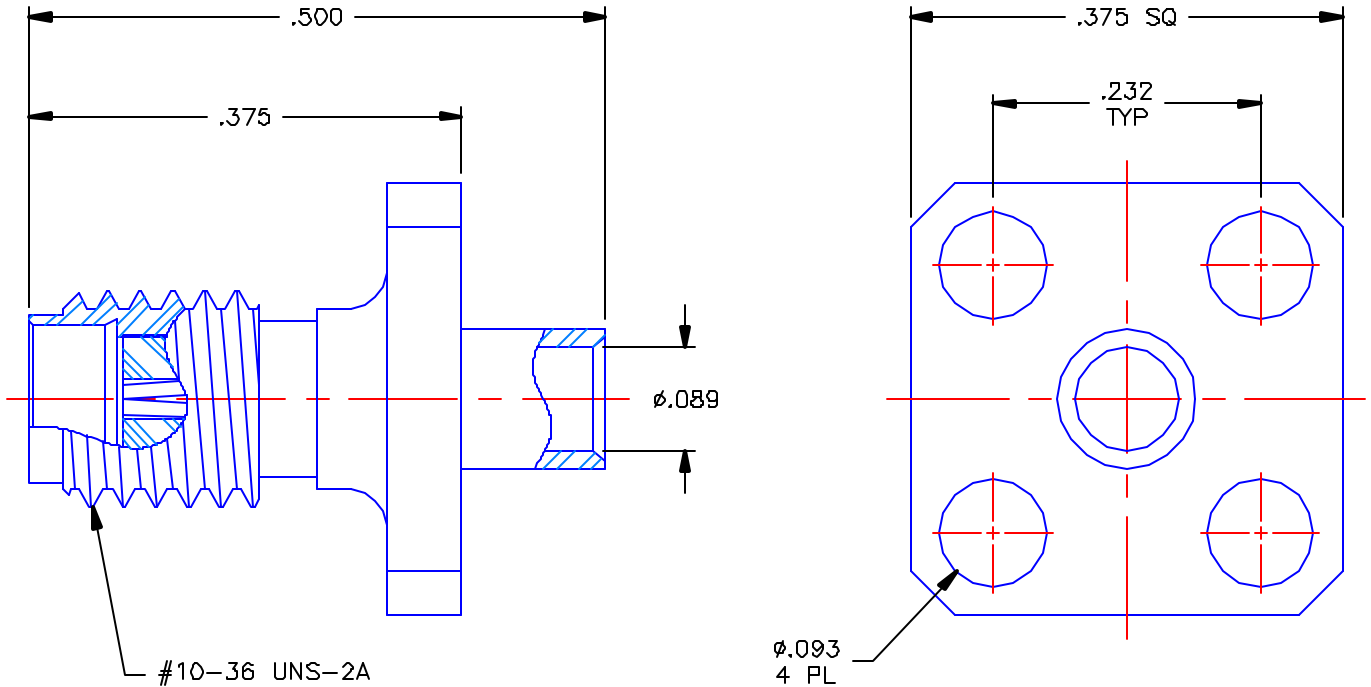

PROPRIETARY INFORMATION
 NOT TO BE RELEASED
 WITHOUT WRITTEN PERMISSION
 FROM AN AUTHORIZED
 REPRESENTATIVE OF
 APPLIED ENGINEERING PRODUCTS

NOTES:


MATERIALS:

1. BODY = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.

FINISHES:

1. BODY & CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

ROCKWELL P/N: 357-7528-030

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN:	DATE	 APPLIED ENGINEERING PRODUCTS 104 John W Murphy Dr. New Haven, CT 06513
		D.N.	04/18/02	
DECIMAL	ANGLE	CHKD:	DATE	SSMA STRAIGHT PANEL JACK 4 HOLE FLANGE MOUNT DIRECT SOLDER FOR .085 S/R CABLE
		A.D.M.	05/06/02	
REFERENCE:		APVD:	DATE	SIZE: A FSCM NO.: 19505 DWG. NO.: 9773-1083-110 REV: - SCALE: 6:1 SHEET 1 OF 1
		D.J.C.	05/06/02	
ORIGINATOR: D.N. DATE: 04/18/02		MATERIALS & FINISHES: SEE NOTES		

9773-1083-110