



-  Single through hole models
-  Models designed for leading transceiver ICs
-  Models designed to meet UL60950
-  Minimum Isolation voltage: 1500Vrms





ELECTRICAL SPECIFICATION @25°C

Part Number	Turns Ratio (Pri : Sec ± 5%)	OCL@25°C (mH Min)	LL (uH Max)	C _{ww} (pF Max)	DCR (Ω Max)		Schematic	Primary Pins
					Primary	Secondary		
Standard Temperature Range Models – Operating Temperature 0°C to +70°C								
821-00023	1:1:1 (1:2CS)	1.2	0.5	25	0.7	0.7 & 0.7	2	1-2
801-00027	1CT:3CT	1.2	0.5	30	0.7	1.6	4	1-5
821-00156	1:1	1.2	0.5	25	0.7	0.7	1	1-2
821-00006	1CT:1	1.2	0.8	25	0.7	0.7	3	1-5
801-00024	1:1.36	1.2	0.8	35	0.7	0.8	1	5-6
821-00157	1.26CS:1 (1:1:1.58)	0.3	0.6	30	0.8	0.6	2	1-4
821-00158	1CS:1	0.8	0.6	30	0.8	0.6	2	1-4
801-00025	1CS:1.31	0.8	0.4	30	0.8	0.6	2	1-4
821-00159	1CT:2CT	1.2	0.30-0.55	30	0.7	1.2	4	1-5
821-00029	1:2CT	1.2	0.5	40	0.7	1.3	3	2-6
821-00160	1:4CT	0.5	1.0	40	0.5	1.5	5	1-5
821-00161	1:1.14CT	1.2	0.8	35	0.7	0.8	5	1-5
821-00005	1:1.15CT	1.5	0.6	35	0.7	0.9	3	2-6
821-00024	1:1/1.26	1.5	0.4	40	0.7	0.9	3	2-6
801-00010	1CT:2CT	1.2	0.5	30	0.7	1.2	4	1-5
821-00162	1:2.3CT	1.2	0.8	35	0.7	1.4	5	1-5
821-00163	1:1.36CT	1.2	0.8	35	0.7	0.9	5	1-5
821-00032	1CT:1CT	1.2	0.8	25	0.8	0.8	4	1-5
821-00164	1CT:1	0.7	0.7	20	0.2	0.8	3	1-5
821-00165	1:1.36CT	0.7	0.7	20	0.5	0.4	5	1-5
821-00166	1:1.5CT	1.2	0.6	30	0.7	1.0	3	2-6
821-01675	1:1.26CT	1.2	0.8	60	0.9	1.0	4	2-6
821-00433	1:1.583CT	1.2	0.8	60	0.7	1.0	3	2-6
Extended Temperature Range Models – Operating Temperature -40°C to +85°C								
821-00169	1:1.36	1.2	0.8	35	0.9	1.2	1	5-6
821-00170	1:1.15CT	1.5	0.8	40	0.9	1.0	3	2-6
821-00026	1CT:2CT	1.2	0.6	50	1.0	2.0	4	2-6
821-00171	1CT:1CT	1.2	1.0	40	1.0	1.0	4	1-5
821-00172	1CT:3CT	1.2	0.8	60	0.9	2.7	4	1-5
821-00641	1:1/1.26	1.5	0.8	50	0.9	1.1	3	2-6



MECHANICAL DIMENSIONS

Package: T-Case

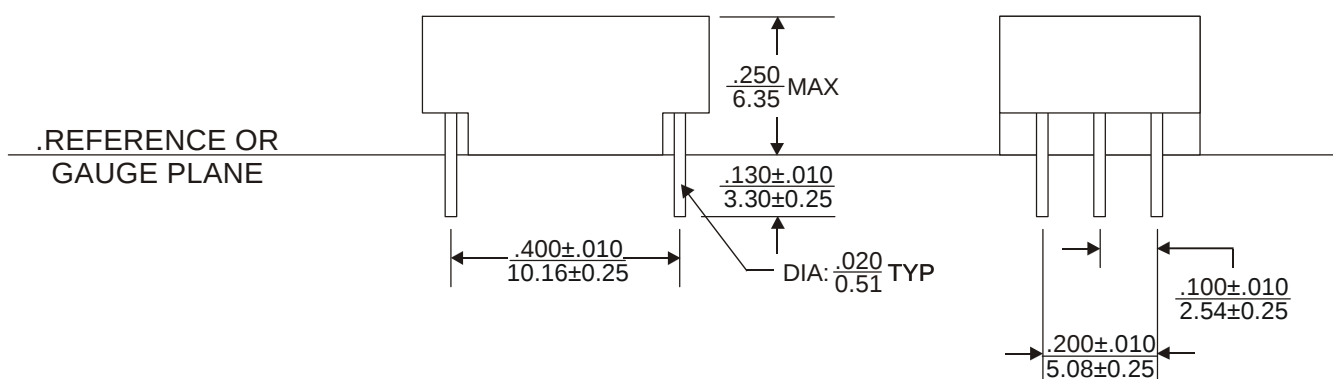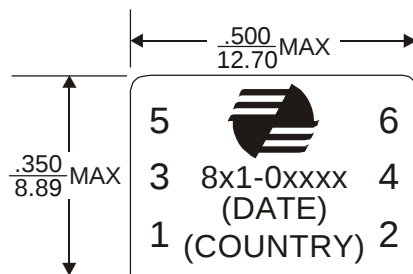


Note : All dimensions are specified in $\frac{\text{inches}}{\text{mm}}$ with higher precedence in inches.
Unless otherwise specified, all tolerances are $\pm .010$ / 0.25 .

Weight (in gram)	: 1.2 typ.
Tube	: 55 / tube

SCHEMATICS


Schematics 1 & 2

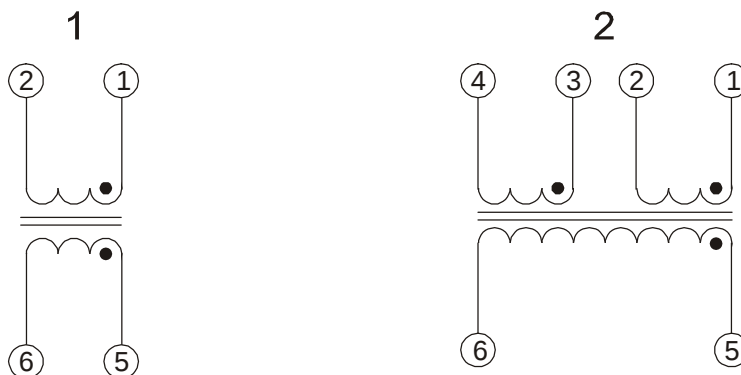



SCHEMATICS

Schematics 3, 4 & 5

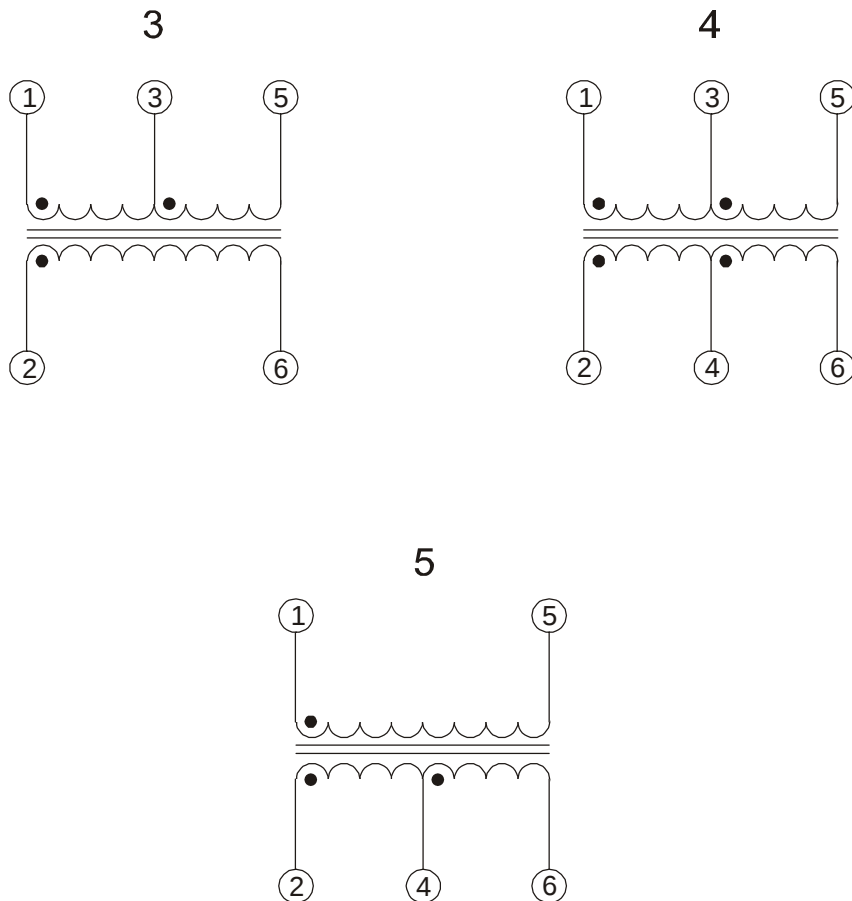

FOR MORE INFORMATION, PLEASE CONTACT

HEADQUARTER

Unit B10, 3/F., Merit Industrial Centre,
94 Tokwawan Road, Kowloon,
Hong Kong
Tel: (852) 2954 3333
Fax: (852) 2954 3304
Email: eempl@eleceltek.com
Website: <http://www.eleceltek.com>

Information herein is for reference only and subject to change without notice. It does not constitute any representation, warranty or commitment of the company in respect of the products in any aspect. All logos, brands and product names mentioned herein are trademarks or registered trademarks of their respective owners. The company does not assume any liability arising out of the application or use of any product or circuit described herein. Copyrights 2003, E & E Magnetic Products Limited.