
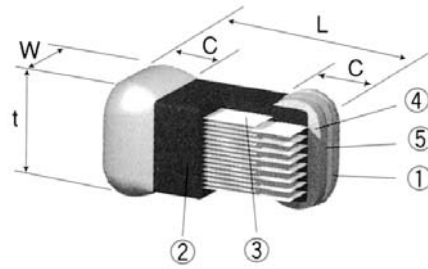


CIRCUIT PROTECTORS
MULTILAYER METAL OXIDE
VARISTOR
NV73



STRUCTURE

- 1 Sn plating
- 2 Varistor element
- 3 Inner electrode
- 4 Inner side electrode
- 5 Ni plating

PRODUCT CODE	COATING COLOR	MARKING
NV73	Black	None

Products with Pb-free terminations meet RoHS requirements

TYPE DESIGNATION (HOW TO ORDER) SIZE 0402

New Part No. (Pb-free)	NV73	A	L	1E	T	TP	12
PRODUCT CODE		ENERGY CODE A	CAPACITANCE TYPE	SIZE 1E: 0402	TERMINATION SURFACE MATERIAL T: Sn	TAPING* TP: 10.000 pcs/reel	VARIATOR VOLTAGE Unit: V real number
			*Blank: Standard type *L: Low capacitance type			*Please see "PACKAGING"	

TYPE DESIGNATION (HOW TO ORDER) SIZES 0603 ... 1206

Sn/Pb Part No.	NV	20	MC	A	A	P	T		
New Part No. (Pb-free)	NV73				A	1J	T	TE	20
PRODUCT CODE		VARIATOR VOLTAGE Unit: V real number	MULTILAYER CHIP	SIZE A: 0603 1: 0805 2: 1206	ENERGY CODE A, B, C	SIZE 1J: 0603 2A: 0805 2B: 1206	TERMINATION SURFACE MATERIAL T: Sn (P: SnPb) (*Blank: AgPd)	TAPING* TE: 2.500 pcs/reel TEB: 10.000 pcs/reel	VARIATOR VOLTAGE Unit: V real number
							(*Blank: AgPd)	*Please see "PACKAGING"	

FEATURES

- Multilayer chip varistor in standard size 0402, 0603, 0805 and 1206
- Excellent transient voltage suppression
- Bi-directional clamping characteristics
- Wide operating voltage range
- Able to withstand high surge current
- Suitable for on board protection of transistors and IC's from transient surges including ESD
- Ideal as surge protection in cellular phones, data transmission lines, battery charges or automotive electrical systems
- Operating temperature range: -40°C ... +85°C
- Storage temperature range: -40°C ... +125°C
- Suitable for reflow soldering

DIMENSIONS (mm)

SIZE	TYPE	L	W	t	c
NEW 0402	NV73 □ 1E	1.0 ± 0.1	0.5 ± 0.1	0.6 max.	0.25 ± 0.15
0603	NV73 □ 1J	1.6 ± 0.15	0.8 ± 0.15	0.8 ± 0.15	0.4 ^{+0.15} _{-0.2}
0805	NV73 □ 2A	2 ± 0.2	1.25 ± 0.2	1.3 max.	0.5 ± 0.25
1206	NV73 □ 2B	3.2 ± 0.2	1.6 ± 0.2	1.65 max.	0.5 ^{+0.35} _{-0.25}

Energy code is to be entered in □.

NEW

RATING SIZE 0402

TYPE	VARIATOR VOLTAGE V _{1mA}	VARIATOR VOLTAGE TOLERANCE	MAX. ALLOWABLE VOLTAGE D.C.	CLAMPING VOLTAGE I _c =1A 8x20 μs	MAX. ENERGY 10/1000 μs	MAX. PEAK CURRENT 2 TIMES 8X20 μs	CAPACITANCE (TYP) 1kHz
NV73 A 1E T TP 8	8 V	6.4 V... 9.6 V	5.5 V	20 V	0.05 J	20 A	480 pF
NV73 A 1E T TP 18	18 V	16.2 V... 19.8 V	14 V	35 V	0.05 J	20 A	160 pF
NV73 A L 1E T TP 12	12 V	10 V... 14 V	5.5 V	30 V	0.03 J	5 A	50 pF
NV73 A L 1E T TP 21	21 V	18 V... 24 V	14 V	50 V	0.03 J	5 A	50 pF
NV73 A L 1E T TP 28	28 V	24 V... 32 V	18 V	65 V	0.005 J	2 A	15 pF
NV73 A L 1E T TP 120	120 V	90 V... 150 V	18 V	350V (I _c =0.5A)	0.005 J	0.5 A	3pF (1MHz)

TP: 10.000 pcs/reel

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

CIRCUIT PROTECTORS MULTILAYER METAL OXIDE VARISTOR NV73

RATING* SIZES 0603 ... 1206


TYPE	BREAKDOWN VOLTAGE $V_C [I_C=1mA]$		MAX. ALLOWABLE VOLTAGE		CLAMPING VOLTAGE		MAX. PEAK CURRENT I_P^{**}	MAX. ENERGY E^{**}	CAPACITANCE (ref.) $C(1k...1MHz)$	TYPE	BREAKDOWN VOLTAGE $V_C [I_C=1mA]$		MAX. ALLOWABLE VOLTAGE		CLAMPING VOLTAGE		MAX. PEAK CURRENT I_P^{**}	MAX. ENERGY E^{**}	CAPACITANCE (ref.) $C(1k...1MHz)$
	AC rms	DC	V_P	I_P	AC rms	DC					V_P	I_P	AC rms	DC	V_P	I_P			
NV73A1J 8.2	6.8 V ... 9.8 V	4.2 V	6 V	21 V	2 A	30 A	0.1 J	370 pF	NV73C2A 8.2	6.8 V ... 9.8 V	4.2 V	6 V	18 V	2 A	50 A	0.1 J	25 A	0.04 J	1000 pF
NV73A1J 12	10 V ... 14.4 V	6.1 V	8.6 V	29 V					NV73C2A 12	10 V ... 14.4 V	6.1 V	8.6 V	24 V						
NV73A1J 15	12.5 V ... 18 V	7.6 V	10.8 V	35 V					NV73C2A 15	12.5 V ... 18 V	7.6 V	10.8 V	29 V						
NV73A1J 18	16 V ... 20 V	9.1 V	12.8 V	37 V					NV73C2A 18	16 V ... 20 V	9.1 V	12.8 V	32 V						
NV73A1J 20	18 V ... 22 V	10.6 V	15 V	40 V					NV73C2A 20	18 V ... 22 V	10.6 V	15 V	35 V						
NV73A1J 22	19 V ... 24 V	12 V	16.5 V	42 V					NV73C2A 22	19 V ... 24 V	12 V	16.5 V	40 V						
NV73A1J 24	21.8 V ... 26.5 V	14 V	18 V	46 V					NV73C2A 24	21.8 V ... 26.5 V	14 V	18 V	42 V						
NV73A1J 27	25 V ... 32 V	17 V	22 V	49 V	100 pF	NV73A2B 27	25 V ... 32 V	17 V	22 V	55 V	2 A	40 A	0.15 J	500 pF					
NV73A2A 8.2	6.8 V ... 9.8 V	4.2 V	6 V	18 V	NV73A2B 33	30 V ... 39 V	20 V	26 V	60 V										
NV73A2A 12	10 V ... 14.4 V	6.1 V	8.6 V	24 V	NV73A2B 39	37 V ... 47 V	25 V	31 V	72 A										
NV73A2A 15	12.5 V ... 18 V	7.6 V	10.8 V	29 V	NV73A2B 47	45 V ... 54 V	30 V	38 V	85 V										
NV73A2A 18	16 V ... 20 V	9.1 V	12.8 V	29 V	NV73A2B 56	52 V ... 62 V	35 V	45 V	100 V										
NV73A2A 20	18 V ... 22 V	10.6 V	15 V	33 V	NV73B2B 8.2	6.8 V ... 9.8 V	4.2 V	6 V	18 V	2 A					50 A	0.11 J	300 pF		
NV73A2A 22	19 V ... 24 V	12 V	16.5 V	39 V	NV73B2B 12	10 V ... 14.4 V	6.1 V	8.6 V	24 V										
NV73A2A 24	21.8 V ... 26.5 V	14 V	18 V	42 V	NV73B2B 15	12.5 V ... 18 V	7.6 V	10.8 V	29 V										
NV73A2A 27	25 V ... 32 V	17 V	22 V	50 V	NV73B2B 18	16 V ... 20 V	9.1 V	12.8 V	32 V										
NV73A2A 33	30 V ... 39 V	20 V	26 V	60 V	NV73B2B 20	18 V ... 22 V	10.6 V	15 V	35 V										
NV73A2A 39	37 V ... 47 V	25 V	31 V	72 V	NV73B2B 22	19 V ... 24 V	12 V	16.5 V	40 V										
NV73A2A 47	45 V ... 54 V	30 V	38 V	86 V	NV73B2B 24	21.8 V ... 26.5 V	14 V	18 V	42 V										
NV73B2A 8.2	6.8 V ... 9.8 V	4.2 V	6.0 V	18 V	0.03 J	20 A	0.03 J	1000 pF	NV73B2B 27	25 V ... 32 V	17 V	22 V	52 V	2 A	70 A	0.19 J	2000 pF		
NV73B2A 12	10 V ... 14.4 V	6.1 V	8.6 V	24 V	0.05 J	20 A	0.05 J		NV73C2B 8.2	6.8 V ... 9.8 V	4.2 V	6 V	18 V						
NV73B2A 15	12.5 V ... 18 V	7.6 V	10.8 V	30 V	0.07 J	20 A	0.07 J		NV73C2B 12	10 V ... 14.4 V	6.1 V	8.6 V	24 V						
NV73B2A 18	16 V ... 20 V	9.1 V	12.8 V	32 V	0.08 J	20 A	0.08 J		NV73C2B 15	12.5 V ... 18 V	7.6 V	10.8 V	29 V						
NV73B2A 20	18 V ... 22 V	10.6 V	15 V	36 V	0.09 J	20 A	0.09 J		NV73C2B 18	16 V ... 20 V	9.1 V	12.8 V	29 V						
NV73B2A 22	19 V ... 24 V	12 V	16.5 V	40 V	0.11 J	20 A	0.11 J		NV73C2B 20	18 V ... 22 V	10.6 V	15 V	31 V						
NV73B2A 24	21.8 V ... 26.5 V	14 V	18 V	42 V	0.12 J	20 A	0.12 J		NV73C2B 22	19 V ... 24 V	12 V	16.5 V	35 V						
NV73B2A 27	25 V ... 32 V	17 V	22 V	58 V	0.24 J	20 A	0.24 J	NV73C2B 24	21.8 V ... 26.5 V	14 V	18 V	38 V							
NV73B2A 33	30 V ... 39 V	20 V	26 V	66 V	0.25 J	20 A	0.25 J	NV73C2B 27	25 V ... 32 V	17 V	22 V	48 V	2 A	40 A	0.06 J	500 pF			
NV73B2A 39	37 V ... 47 V	25 V	31 V	72 V	0.14 J	25 A	0.14 J	NV73C2B 30	30 V ... 39 V	20 V	26 V	48 V							
NV73B2A 47	45 V ... 54 V	30 V	38 V	86 V	0.16 J	25 A	0.16 J	NV73C2B 33	37 V ... 47 V	25 V	31 V	52 V							
NV73B2A 56	52 V ... 62 V	35 V	45 V	100 V	0.26 J	25 A	0.26 J	NV73C2B 39	45 V ... 54 V	30 V	38 V	55 V							
NV73B2B 8.2	6.8 V ... 9.8 V	4.2 V	6 V	18 V	0.03 J	20 A	0.03 J	NV73C2B 47	52 V ... 62 V	35 V	45 V	55 V							
NV73B2B 12	10 V ... 14.4 V	6.1 V	8.6 V	24 V	0.07 J	20 A	0.07 J	NV73C2B 56	62 V ... 72 V	40 V	50 V	55 V							
NV73B2B 15	12.5 V ... 18 V	7.6 V	10.8 V	29 V	0.09 J	20 A	0.09 J	NV73C2B 62	72 V ... 82 V	45 V	55 V	55 V							

* Ambient temperature: +25 °C
 ** E: Maximum energy - the maximum energy within the varistor voltage change of ±10% when a single impulse of 2msec. is applied.
 Ip: Maximum peak current - the maximum peak current within the varistor voltage change of ±10% when a single standard impulse of 8/20µsec. is applied two times with an interval of 5 min.


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

VOLTAGE-CURRENT CURVES (Ta = 25°C)

NV73A1E (0402)

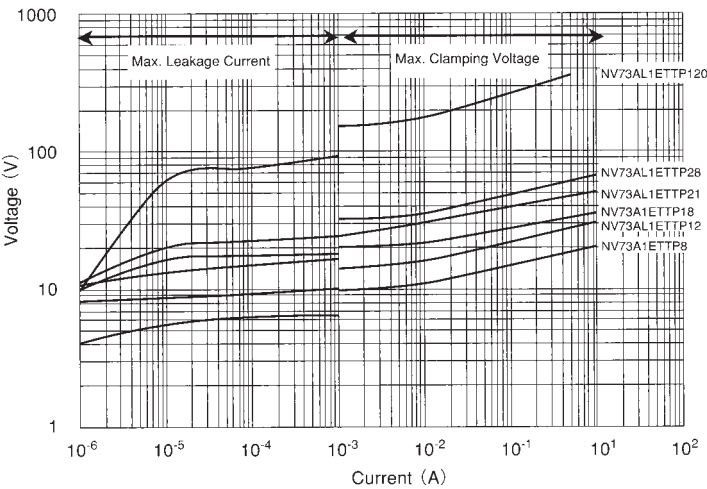

NV73A1J (0603)

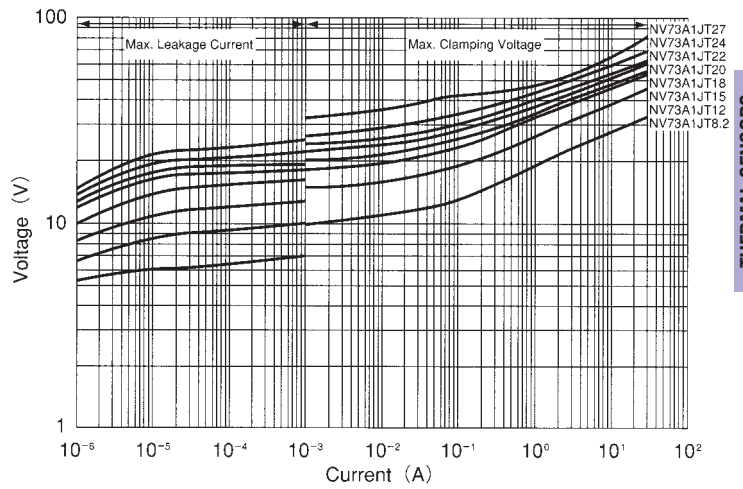


THERMAL SENSORS
CIRCUIT PROTECTORS


CIRCUIT PROTECTORS, MULTILAYER METAL OXIDE VARISTOR, NV73

VOLTAGE-CURRENT CURVES (Ta = 25°C)


NV73A2A (0805)

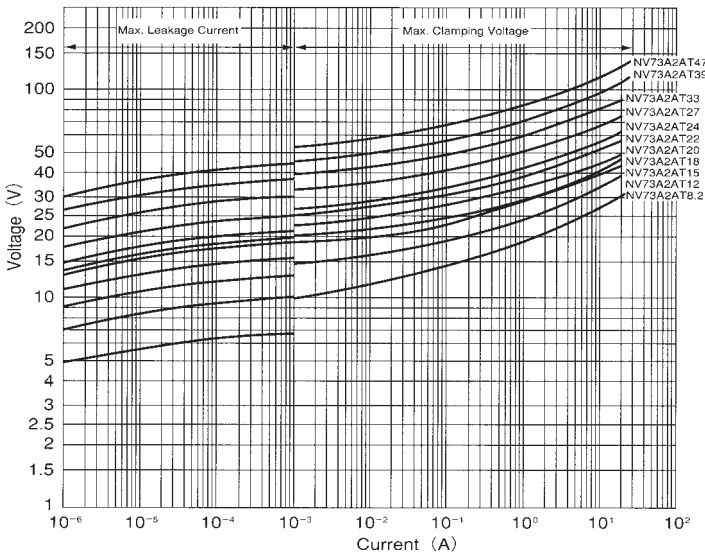


NV73B2A (0805)

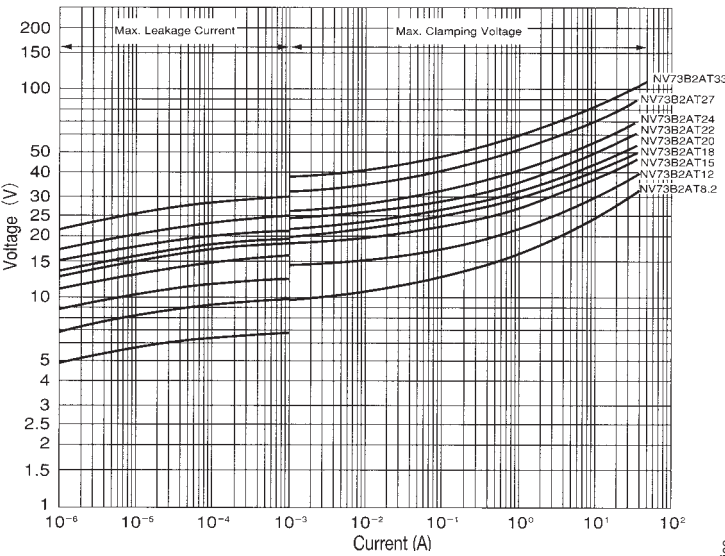


NV73C2A (0805)

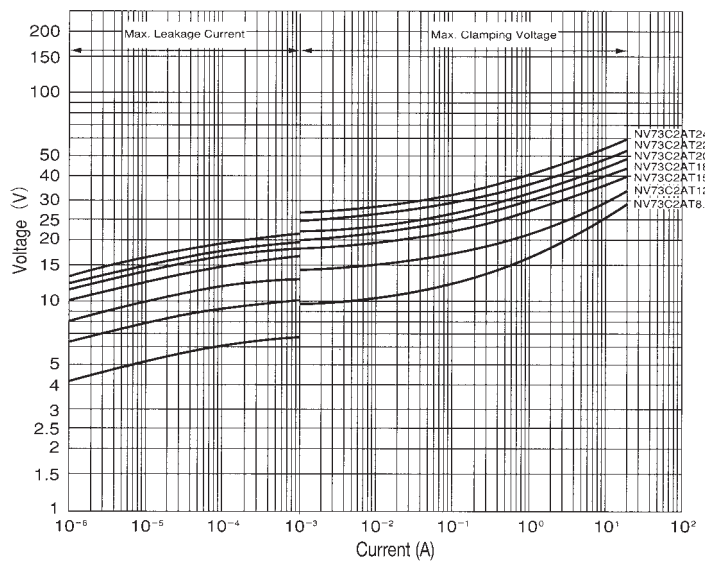


NV73A2B (1206)

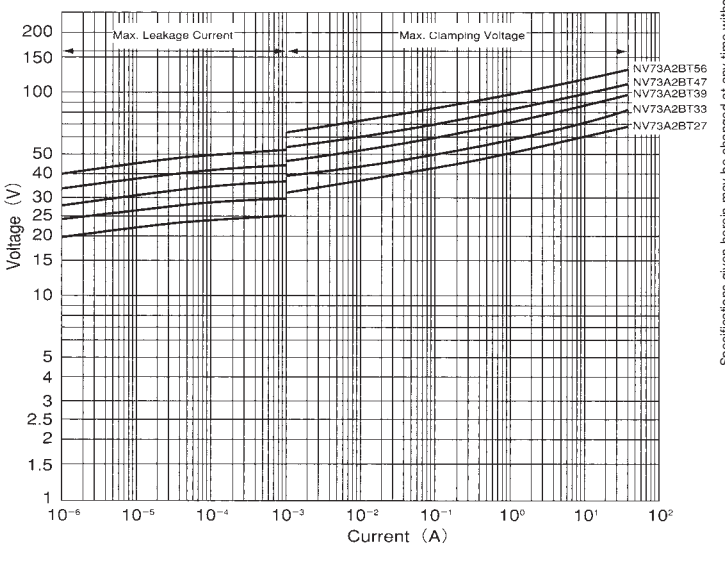

NV73B2B (1206)

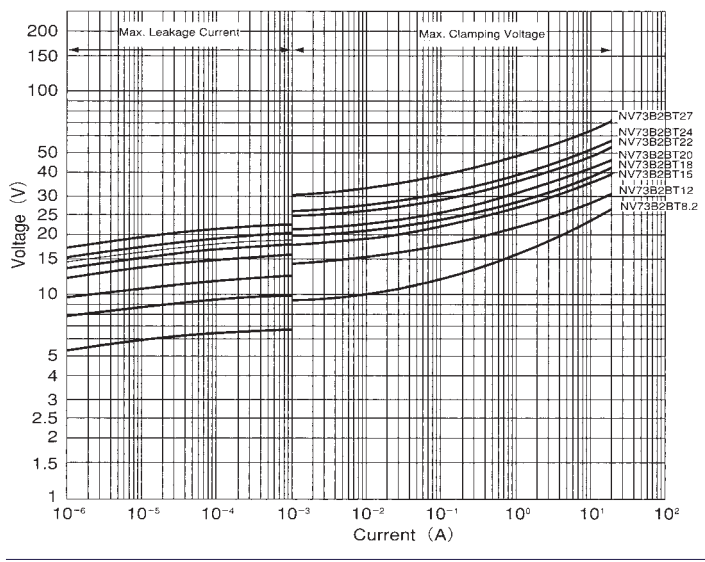

NV73C2B (1206)

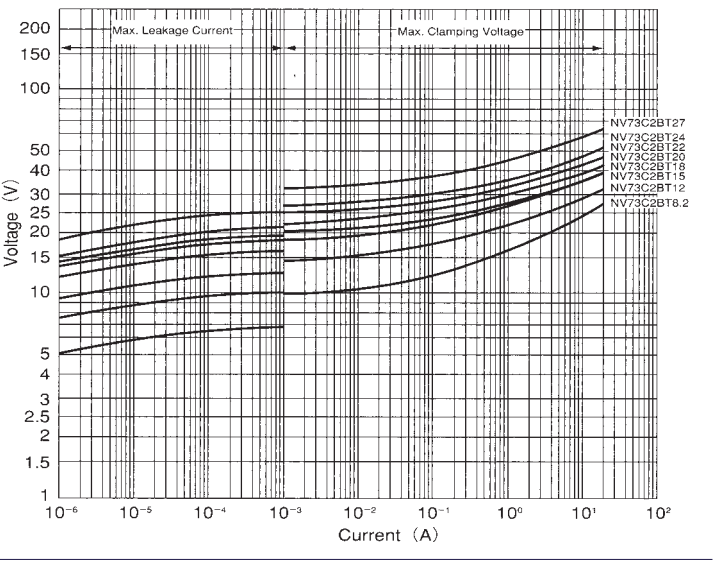

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

THERMAL SENSORS
CIRCUIT PROTECTORS