

**TTL  
LSI**

# TYPES SN54284, SN54285, SN74284, SN74285 4-BIT-BY-4-BIT PARALLEL BINARY MULTIPLIERS

BULLETIN NO. DL-S 7211741, MAY 1972—REVISED DECEMBER 1972




- Fast Multiplication of Two Binary Numbers  
8-Bit Product in 40 ns Typical
- Expandable for N-Bit-by-n-Bit Applications:  
16-Bit Product in 70 ns Typical  
32-Bit Product in 103 ns Typical
- Fully Compatible with Most DTL and  
TTL Circuits
- Diode-Clamped Inputs Simplify System  
Design

### description

These high-speed TTL circuits are designed to be used in high-performance parallel multiplication applications. When connected as shown in Figure A, these circuits perform the positive-logic multiplication of two 4-bit binary words. The eight-bit binary product is generated with typically only 40 nanoseconds delay.

This basic four-by-four multiplier can be utilized as a fundamental building block for implementing larger multipliers. For example, the four-by-four building blocks can be connected as shown in Figure B to generate submultiple partial products. These results can then be summed in a Wallace tree, and, as illustrated, will produce a 16-bit product for the two eight-bit words typically in 70 nanoseconds. SN54H183/SN74H183 carry-save adders and SN54S181/SN74S181 arithmetic logic units with the SN54S182/SN74S182 look-ahead generator are used to achieve this high performance. The scheme is expandable for implementing  $N \times M$  bit multipliers.

### schematics of inputs and outputs

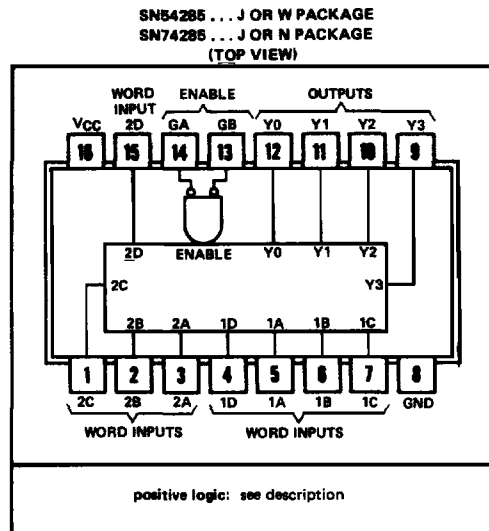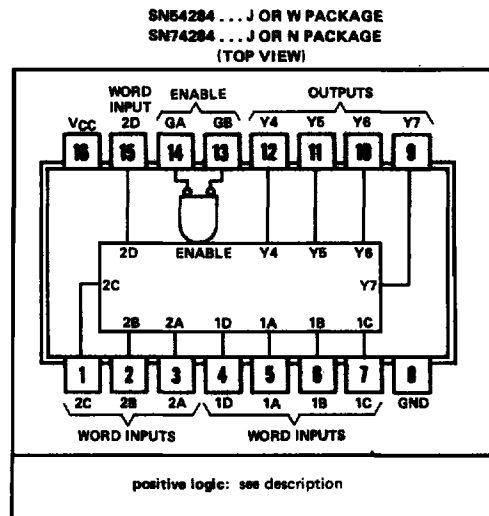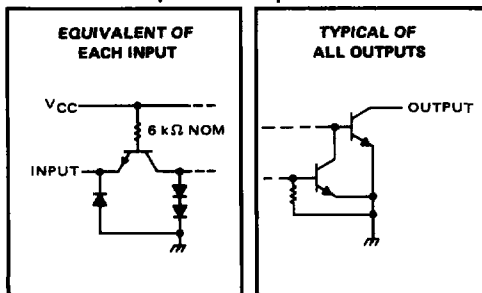

The SN54284 and SN54285 are characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ ; the SN74284 and SN74285 are characterized for operation from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .

# TYPES SN54284, SN54285, SN74284, SN74285 4-BIT-BY-4-BIT PARALLEL BINARY MULTIPLIERS

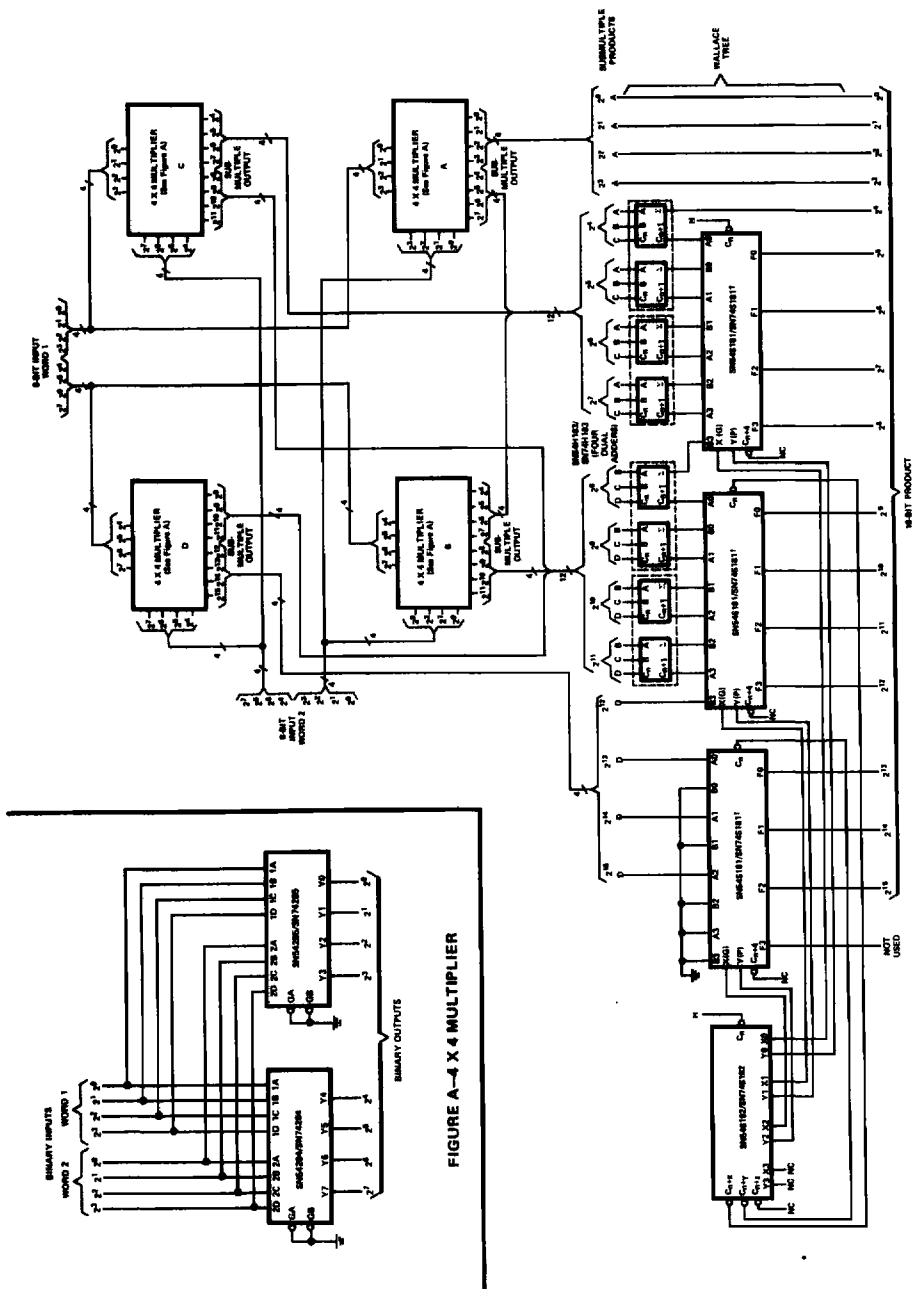


FIGURE B-8 X 8 MULTIPLIER

† Other terminals of the three SN54S181/SN74S181 ALU's are connected as follows: S3 = H, S2 = L, S1 = L, S0 = H, M = L. Output A = B is not used for this application.

# TYPES SN54284, SN54285, SN74284, SN74285

## 4-BIT-BY-4-BIT PARALLEL BINARY MULTIPLIERS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, $V_{CC}$ (see Note 1)	7 V
Input voltage	5.5 V
Operating free-air temperature range: SN54 <sup>†</sup> Circuits	-55°C to 125°C
SN74 <sup>†</sup> Circuits	0°C to 70°C
Storage temperature range	-65°C to 150°C

NOTE 1: Voltage values are with respect to network ground terminal.

recommended operating conditions

	SN54284 SN54285			SN74284 SN74285			UNIT		
	MIN	NOM	MAX	MIN	NOM	MAX			
Supply voltage, $V_{CC}$	4.5	5	5.5	4.75	5	5.25	V		
High-level output voltage, $V_{OH}$	5.5			5.5			V		
Low-level output current, $I_{OL}$	16			16			mA		
Operating free-air temperature, $T_A$	-55			125			0	70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS <sup>†</sup>	MIN	TYP <sup>‡</sup>	MAX	UNIT
$V_{IH}$ High-level input voltage		2			V
$V_{IL}$ Low-level input voltage				0.8	V
$V_I$ Input clamp voltage	$V_{CC} = \text{MIN}$ , $I_I = -12 \text{ mA}$			-1.5	V
$I_{OH}$ High-level output current	$V_{CC} = \text{MIN}$ , $V_{IH} = 2 \text{ V}$ , $V_{IL} = 0.8 \text{ V}$ , $V_{OH} = 5.5 \text{ V}$			40	$\mu\text{A}$
$V_{OL}$ Low-level output voltage	$V_{CC} = \text{MIN}$ , $V_{IH} = 2 \text{ V}$ , $V_{IL} = 0.8 \text{ V}$	$I_{OL} = 12 \text{ mA}$		0.4	V
		$I_{OL} = 16 \text{ mA}$		0.45	
$I_I$ Input current at maximum input voltage	$V_{CC} = \text{MAX}$ , $V_I = 5.5 \text{ V}$			1	mA
$I_{IH}$ High-level input current	$V_{CC} = \text{MAX}$ , $V_I = 2.4 \text{ V}$			40	$\mu\text{A}$
$I_{IL}$ Low-level input current	$V_{CC} = \text{MAX}$ , $V_I = 0.4 \text{ V}$			-1	mA
$I_{CC}$ Supply current	$V_{CC} = \text{MAX}$ , $T_A = 125^\circ\text{C}$ , See Note 2	SN54284, SN54285 N package only		99	mA
		SN54284, SN54285 SN74284, SN74285		92 110	
	See Note 2			92 130	

<sup>†</sup>For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.

<sup>‡</sup>All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

NOTE 2: With outputs open and both enable inputs grounded,  $I_{CC}$  is measured first by selecting an output product which contains three or more high-level bits, then by selecting an output product which contains four low-level bits.

switching characteristics,  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{PLH}$ Propagation delay time, low-to-high-level output from enable	$C_L = 30 \text{ pF}$ to GND, $R_{L1} = 300 \Omega$ to $V_{CC}$ ,			20	ns
$t_{PHL}$ Propagation delay time, high-to-low-level output from enable				20	
$t_{PLH}$ Propagation delay time, low-to-high-level output from word inputs	$R_{L2} = 600 \Omega$ to GND, See Note 3			40	ns
$t_{PHL}$ Propagation delay time, high-to-low-level output from word inputs				40	

NOTE 3: Load circuit is as described above; waveforms are shown on page 3-10.