


IF DETECT ICs

FM IF DETECTION IC FOR PAGER (Built-in 2nd MIX)


FEATURES

- Built-in 2nd MIX for double conversion method
Mix operating frequency : 10~50MHz
- Built-in low pass filter (LPF) and waveform shaping circuit enable the extraction of FSK signals from voice signal
- High transmit rate : 1200bps (Typ.)
- Built-in battery-saving function.
It is possible to reduce load of the battery which is functioning as power supply
- Alarm Function (ALM)
Alarm sensitivity : $V_{ALM} = 1.1V$ (Typ.)
- Constant voltage power supply can be fabricated through externally adding a transistor
output voltage : $V_{REG} = 1.0V$ (Typ.)
- Extremely low current consumption : $I_{CC} = 1.1mA$ (Typ.)
- Power supply voltage : $V_{CC} = 1.1 \sim 3.5V$
- Small package : SSOP20 PIN (1.00mm pitch)
SSOP20 PIN (0.65mm pitch)

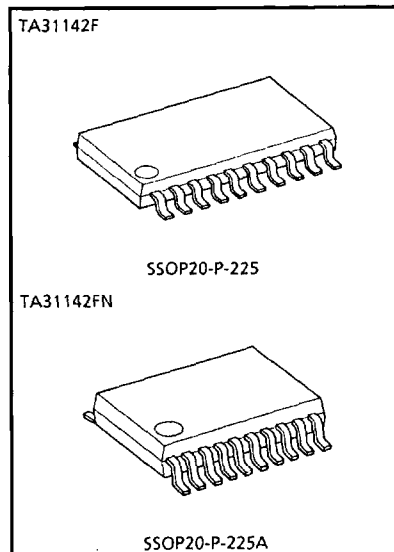

Weight SSOP20-P-225 : 0.18g (Typ.)
SSOP20-P-225A : 0.09g (Typ.)








BLOCK DIAGRAM

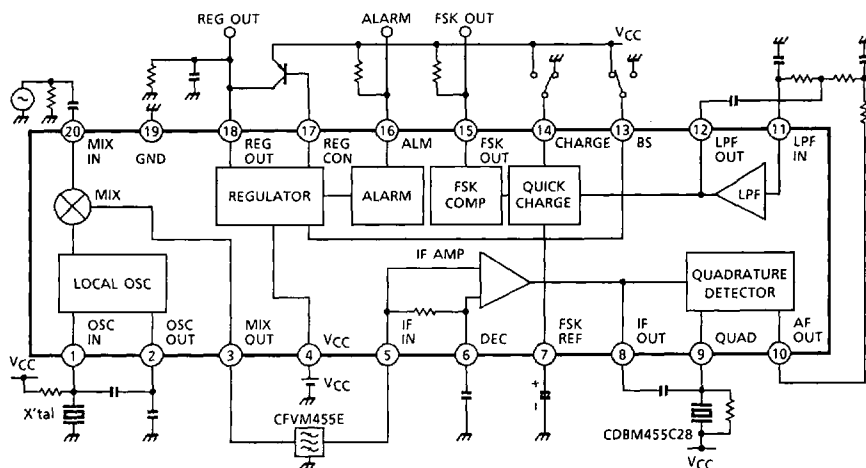

TA31142F/FN-1

IF DETECT ICs








PIN FUNCTION (The values of resistor and capacitor are typical.)

PIN No.	PIN NAME	FUNCTION	INTERNAL EQUIVALENT CIRCUIT				
1	OSC IN	Input terminal for local oscillator. In case of oscillating by X'tal, connect to this terminal.					
2	OSC OUT	Output terminal for local oscillator. In case of input from external circuit, input to this terminal.					
3	MIX OUT	Output terminal for MIX. Output impedance is about 2kΩ.					
4	VCC	Terminal of power supply.	—				
5	IF IN	Input terminal for IF AMP (pin 5) and terminal for decoupling of bias (pin 6). IF IN (pin 5) input impedance is about 2kΩ.					
6	DEC						
8	IF OUT	Output terminal for IF AMP. Connect the discriminator through the coupling capacity.					
9	QUAD	Phase-shift input terminal of FM demodulator. Connect the discriminator.					
10	AF OUT	Output terminal for FM demodulator.					
13	BS	Control terminal for battery-saving. <table border="1"><tr><td>"H"</td><td>Battery-saving OFF state</td></tr><tr><td>"L"</td><td>Battery-saving state</td></tr></table>	"H"	Battery-saving OFF state	"L"	Battery-saving state	
"H"	Battery-saving OFF state						
"L"	Battery-saving state						

6

TA31142F/FN-2

IF DETECT ICs

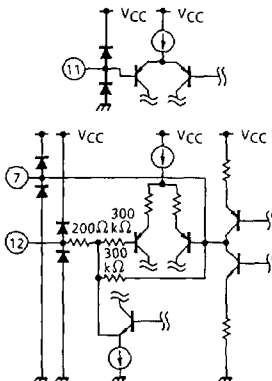PIN No.	PIN NAME	FUNCTION	INTERNAL EQUIVALENT CIRCUIT				
11	LPF IN	Input terminal for LPF Bias is supplied from pin 10 through external resistor.					
12	LPF OUT	Output terminal for LPF. This output is composed by operation amplifier.					
7	FSK REF	Reference input terminal of differential amplifier, which is waveform shaping section. Connect the capacitor externally. By the quick charge-discharge circuit of pushpull output, potentials of pin 7 and pin 12 can be made equal.					
15	FSK OUT	Output terminal for waveform shaping. FSK signal, which is input from LPF OUT (pin 12) and of which waveform is shaped, is output as inverted signal.					
14	CHARGE	Control terminal for quick charge-discharge circuit. <table border="1" data-bbox="322 824 714 885"><tr><td>"H"</td><td>Quick charge-discharge ON</td></tr><tr><td>"L"</td><td>Quick charge-discharge OFF</td></tr></table>	"H"	Quick charge-discharge ON	"L"	Quick charge-discharge OFF	
"H"	Quick charge-discharge ON						
"L"	Quick charge-discharge OFF						
16	ALM	Output terminal for ALARM. At $V_{CC} \approx 1.1V$, this terminal output becomes "H" ($=V_{CC}$) and can indicate deterioration of battery.					
17	REG CON	Control terminal of external transistor for regulator for external power supply. Connect the PNP transistor externally.					
18	REG OUT	Output voltage monitoring terminal of regulator for external power supply.					
19	GND	Terminal for GND.	—				
20	MIX IN	Input terminal for MIX. Input impedance is about 5kΩ.					

TA31142F/FN-3

DESCRIPTION

1. Battery-saving function

Since the battery-saving function is built-in, this IC can minimize the consumption of battery by means of reducing the current consumption by the battery-saving function when the battery is used as the power supply of the set.

Since BS terminal (pin 13) functions as the base input of the NPN transistor, this IC can be driven by the CMOS output of the microcomputer because of its high input impedance and the drivability with low power.

STATE OF BS TERMINAL (PIN 13)	BATTERY-SAVING FUNCTION	EACH CIRCUIT OPERATION STATE IN IC	QUIESCENT CURRENT CONSUMPTION OF IC
L	Battery-saving state	Operation-stop state	0 μ A (Typ.)
H	Battery-saving OFF state	Normal-operation state	1.1mA (Typ.)

2. FSK waveform shaping function

For extracting the FSK signal from the FSK demodulation signal, the waveform is shaped by the waveform shaping circuit (comparator) in IC and turned into a more correct logic output resulting in reducing the read error of the microcomputer when the FSK signal level is low or the noise is superimposed upon the FSK signal in the weak electric field.

3. Quick charge-discharge circuit

When operation state turn to the battery-saving OFF state (Normal operation state) from the battery-saving state, if the FSK signal is input, the time that the FSK REF terminal (pin 7) arrives at the reference voltage is delayed by the time constant determined by the capacitor connected to the FSK REF terminal (pin 7) and the internal resistor.

In this case, sometimes the erroneous waveform shaping signal is output because of the error of the input voltage of the waveform shaping circuit (comparator).

In such a case, by means of charging or discharging quickly the capacitor connected to the FSK REF terminal (pin 7) by the quick charge-discharge circuit, the time that the FSK REF terminal (pin 7) becomes the same potential as that of the LPF OUT terminal (pin 12) is shortened, and the FSK output of the erroneous waveform shaping signal is prevented.

* When CHARGE terminal (pin 14) is at "H", the quick charge-discharge circuit becomes active state.

4. Alarm function


In case the battery is used as the power supply of the set, when the power supply voltage is reduced and the voltage of the V_{CC} terminal (pin 4) becomes approx. 1.1V, the output of the ALM terminal (pin 16) rises up to approx. 1.1V ($\approx V_{CC}$) and the consumption of the battery power can be detected.

IF DETECT ICs

5. Constant voltage regulator for power supply of external part

Connecting the transistor to the REG CON terminal (pin 17) externally as shown in the figure below, the REG OUT terminal (pin 18) can be used for the constant voltage regulator ($V_{REG} = 1.0V$ (Typ.)) of high-output type.

At the battery-saving state, the constant voltage regulator also becomes OFF.



6. Local oscillation circuit


Local oscillation circuit is Colpitts type oscillator composed by internal emitter follow circuit and external X'tal. Connect the parts as shown the figure below.

Connect the resistor of the base bias for internal transistor between the pin 1 and V_{CC} , or pin 1 and REG OUT terminal (pin 18).

In case of need to increase the current of local oscillation circuit in order to compose the overtone oscillation and improve the stability of oscillation, connect the resistor between pin 2 and GND.

In such a case if the resistor for the base bias of internal transistor is connected between pin 1 and V_{CC} , at battery-saving state, the current only flowing at the resistor between pin 2 and GND flow.

Therefore we recommend to connect the resistor for the base bias between pin 1 and pin 18, or pin 1 and external regulator providing the battery-saving mode.

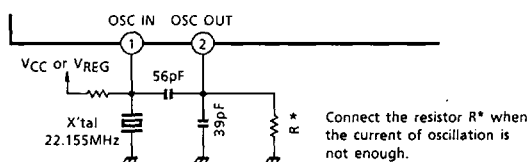

TA31142F/FN-5

MAXIMUM RATING (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Power Supply Voltage	V _{CC}	4	V
Power Dissipation	TA31142F TA31142FN	830 710	mW
Operating Temperature	T _{opr}	-30~85	°C
Storage Temperature	T _{stg}	-55~150	°C

ELECTRICAL CHARACTERISTICS


(Unless otherwise specified, V_{CC} = 1.4V, f_{IN} (MIX) = 21.7MHz, f_{IN} (IF) = 455kHz, Δf = ±4kHz,)
f_{MOD} = 600Hz, Ta = 25°C

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Quiescent Current Consumption	I _{CCQ}	2	—	—	1.1	1.6	mA
Current Consumption	I _{CCO}	3	At battery-saving	—	0	5	μA
Mixer Conversion Gain	GM _V	1	Measured through ceramic filter	9	12.5	16	dB
Mixer Intercept Point	I _p	—	—	—	97	—	dBμV
Mixer Input Resistance	R (MIX) IN	—	—	—	5	—	kΩ
Mixer Output Resistance	R (MIX) OUT	—	—	—	2	—	kΩ
IF AMP Input Resistance	R (IF) IN	—	—	—	2	—	kΩ
SN Ratio 1	SN1	1	V _{IN} (MIX) = 60dBμV EMF, MIX IN	—	63	—	dB
SN Ratio 2	SN2	1	V _{IN} (IF) = 60dBμV EMF, IF IN	—	63	—	dB
SN Ratio 3	SN3	1	V _{IN} (IF) = 22dBμV EMF, IF IN	—	25	—	dB
Limiting Sensitivity 1	V _I (LIM) 1	1	MIX IN	—	14	—	dBμV EMF
Limiting Sensitivity 2	V _I (LIM) 2	1	IF IN	—	23	27	dBμV EMF
Demodulation Output Level	V _{OD}	1	V _{IN} (IF) = 60dBμV EMF	30	45	60	mV _{rms}
AM Rejection Ratio	AMR	1	V _{IN} (IF) = 60dBμV EMF, AM = 30%	—	50	—	dB
FSK Output Duty Ratio	DR	1	V _{IN} (IF) = 60dBμV EMF	40	50	60	%
Alarm Detected Voltage	V _{ALM}	1	—	1.05	1.1	1.15	V
"H" Level Leak Current (ALM)	I _{ALM}	1	—	—	—	2	μA
"L" Level Output Voltage (ALM)	V _{ALM L}	1	I = 100μA	—	—	0.4	V
"H" Level Leak Current (FSK)	I _{FSK}	1	—	—	—	2	μA
"L" Level Output Voltage (FSK)	V _{FSK L}	1	I = 100μA	—	—	0.4	V
Constant Voltage Output	V _{REG}	1	R _L = 430Ω	0.95	1.0	1.05	V
Quick Charging And Discharging Current	I _{CH}	4	V ₇ = 0V, V ₁₂ = 0.18V	35	70	110	μA
"L" Level Output Voltage (REG CON)	REG L	1	I = 100μA	—	—	0.6	V


TA31142F/FN-6

IF DETECT ICs


TEST CIRCUIT 1

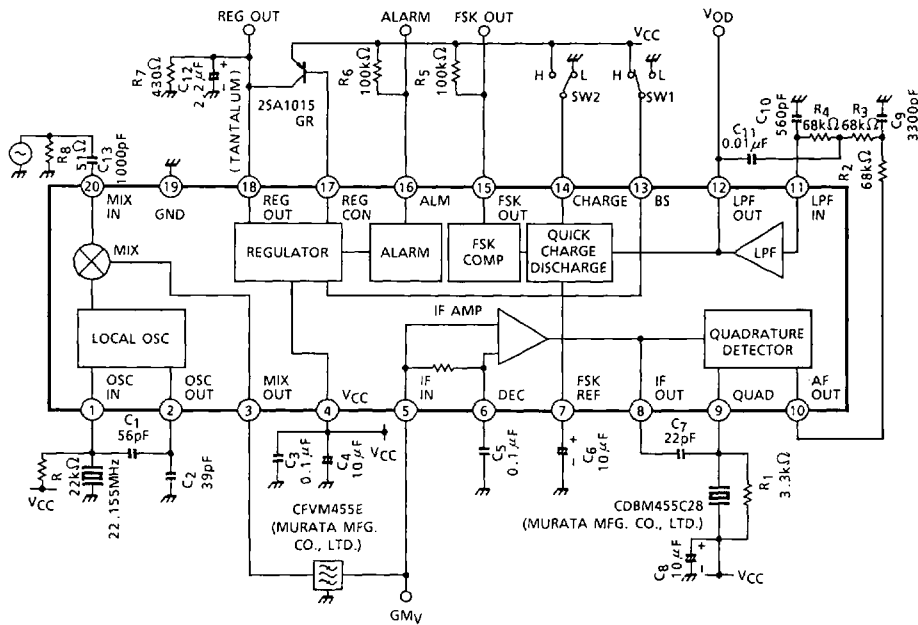


(1) GMV




(2) SN2, 3, V_I (LIM) 2, VOD, AMR




(3) SN1, V_I (LIM) 1




(4) DR



(5) VALM



(6) VALM L




Test condition ... TEST CIRCUIT 1


TA31142F/FN-7

IF DETECT ICs


(7) I_{ALM}




(8) $V_{FSK L}$




(9) I_{FSK}



(10) V_{REG}




(11) $REG L$



TEST CONDITION...TEST CIRCUIT 1


TEST CIRCUIT 2

I_{CCQ}

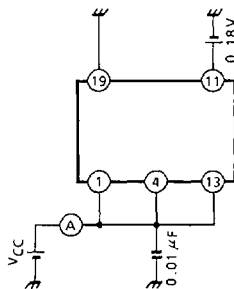


TEST CIRCUIT 3

I_{CCO}





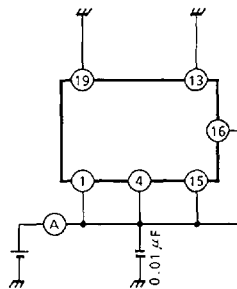


TEST CIRCUIT 4







I_{CH}

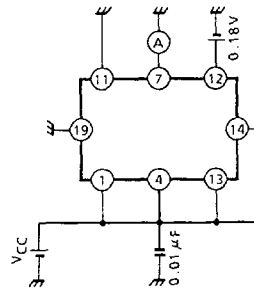



IF DETECT ICs

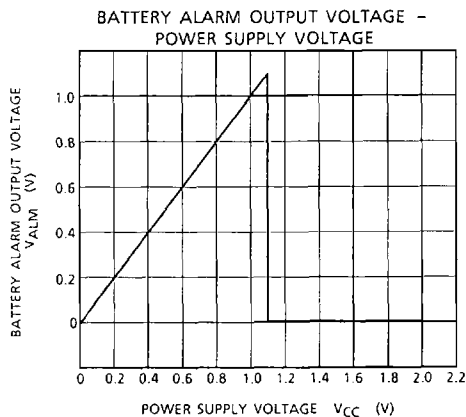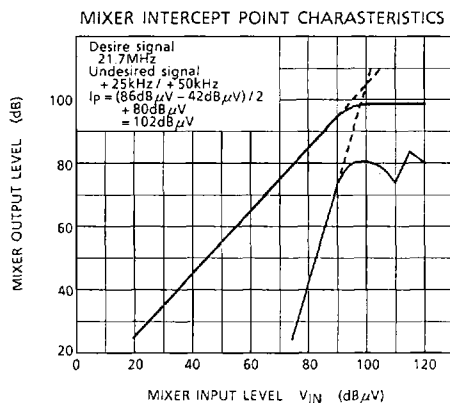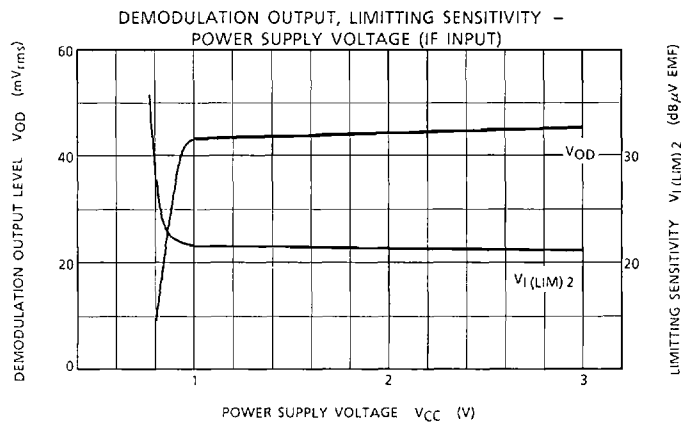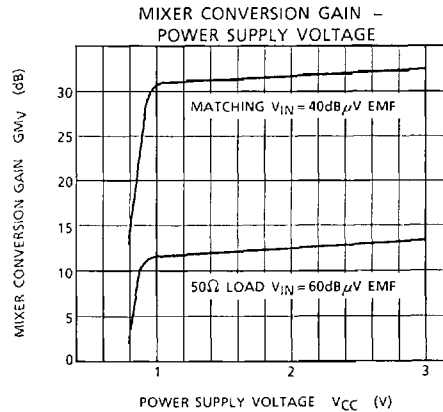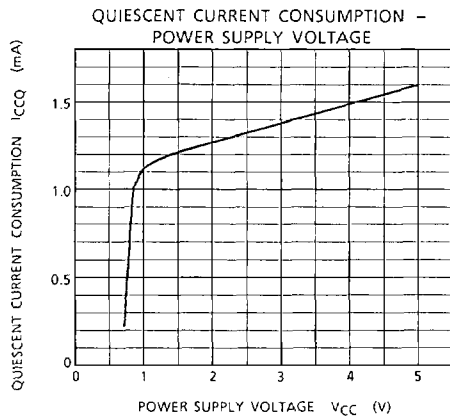

TA31142F/FN-9

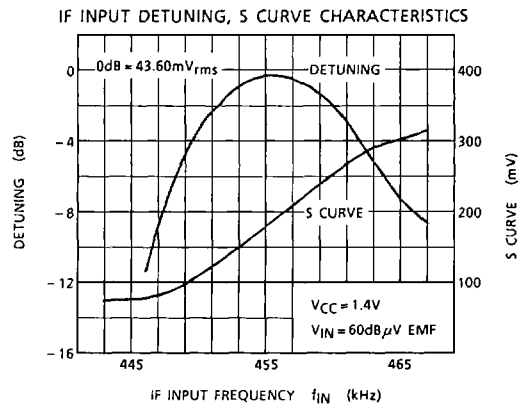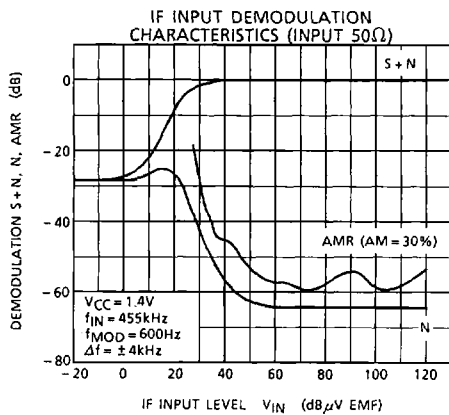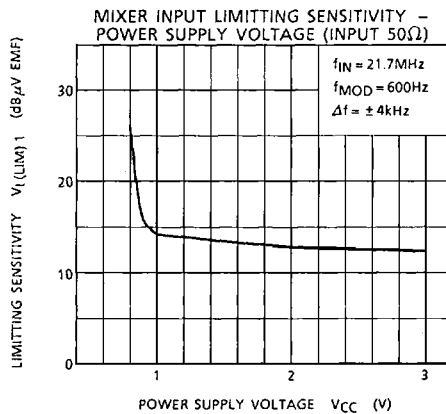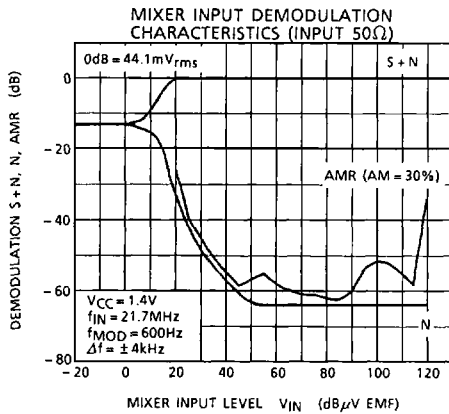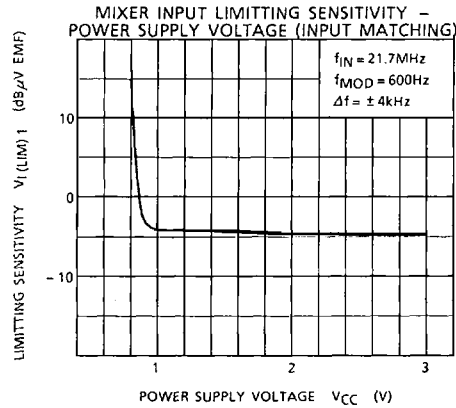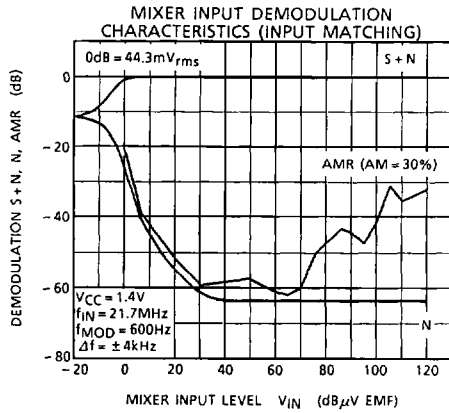

IF DETECT ICs

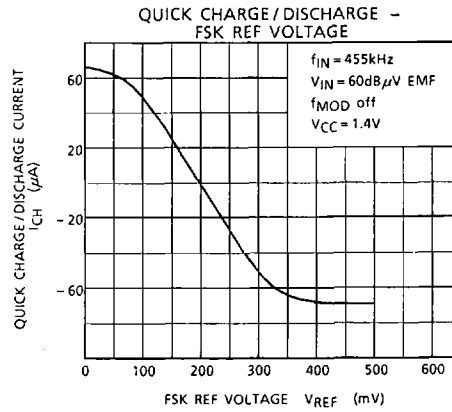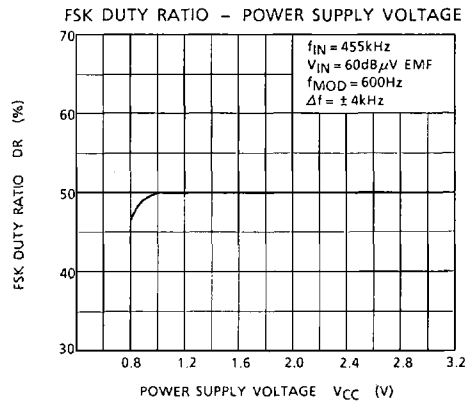

TA31142F/FN-11