


Baureihe SDR 151.420...151.430
(Funkentstördrossel)

Series SDR 151.420...151.430
(RFI suppression choke)

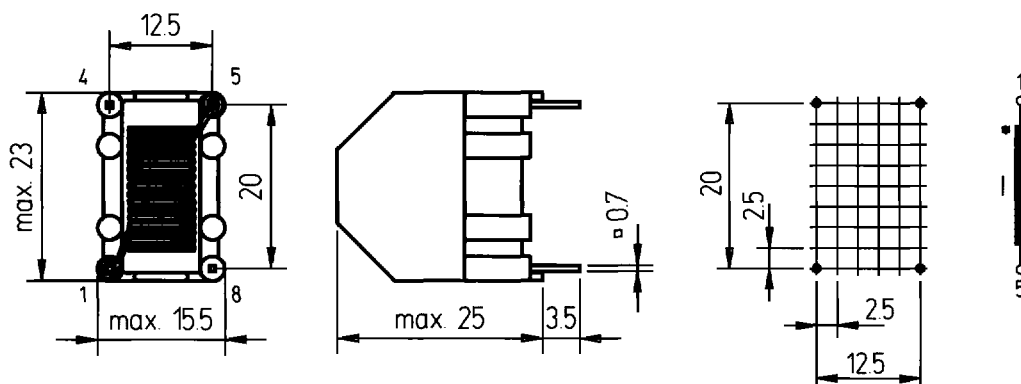

513

Technische Daten / Technical data

- Typischer Kern / *Typical toroid*: R 17/9,5/5
- Leerlaufinduktivität / *No-load inductance*: 22 μH – 2200 μH
- Induktivitätstoleranz / *Inductance tolerance*: $\pm 15\%$
- Strom / *Current*: 0.56 A - 4.5 A
- Betriebstemperatur / *Operating temperature*: -30°C bis/up to +125°C
- Umgebungstemperatur / *Ambient temperature*: $\leq 60^\circ\text{C}$
- Isolierstoffklasse / *Insulation class*: B
- Teilverguß / *partially encapsulated*

Bezeichnung <i>Designation</i>	I_N A	L_0 μH	R $\text{m}\Omega$	Bestellnummer <i>Order no.</i>
SDR 0,56-1,3	0.56	2200	2430	151.420
SDR 0,66-0,7	0.66	1000	1070	151.421
SDR 0,8-0,47	0.80	680	870	151.422
SDR 0,84-0,35	0.84	470	730	151.423
SDR 1,0-0,26	1.00	330	520	151.424
SDR 1,3-0,18	1.30	220	310	151.425
SDR 2,9-0,06	2.90	100	82	151.426
SDR 3,3-0,055	3.30	68	57	151.427
SDR 3,8-0,03	3.80	47	42	151.428
SDR 4,0-0,023	4.00	33	37	151.429
SDR 4,5-0,016	4.50	22	31	151.430